

COMMITTEE ROOM


Lloyd's Register


Marine Technical Library
London

Marine Data Systems

Date
14/12/04

18940 Catalogues

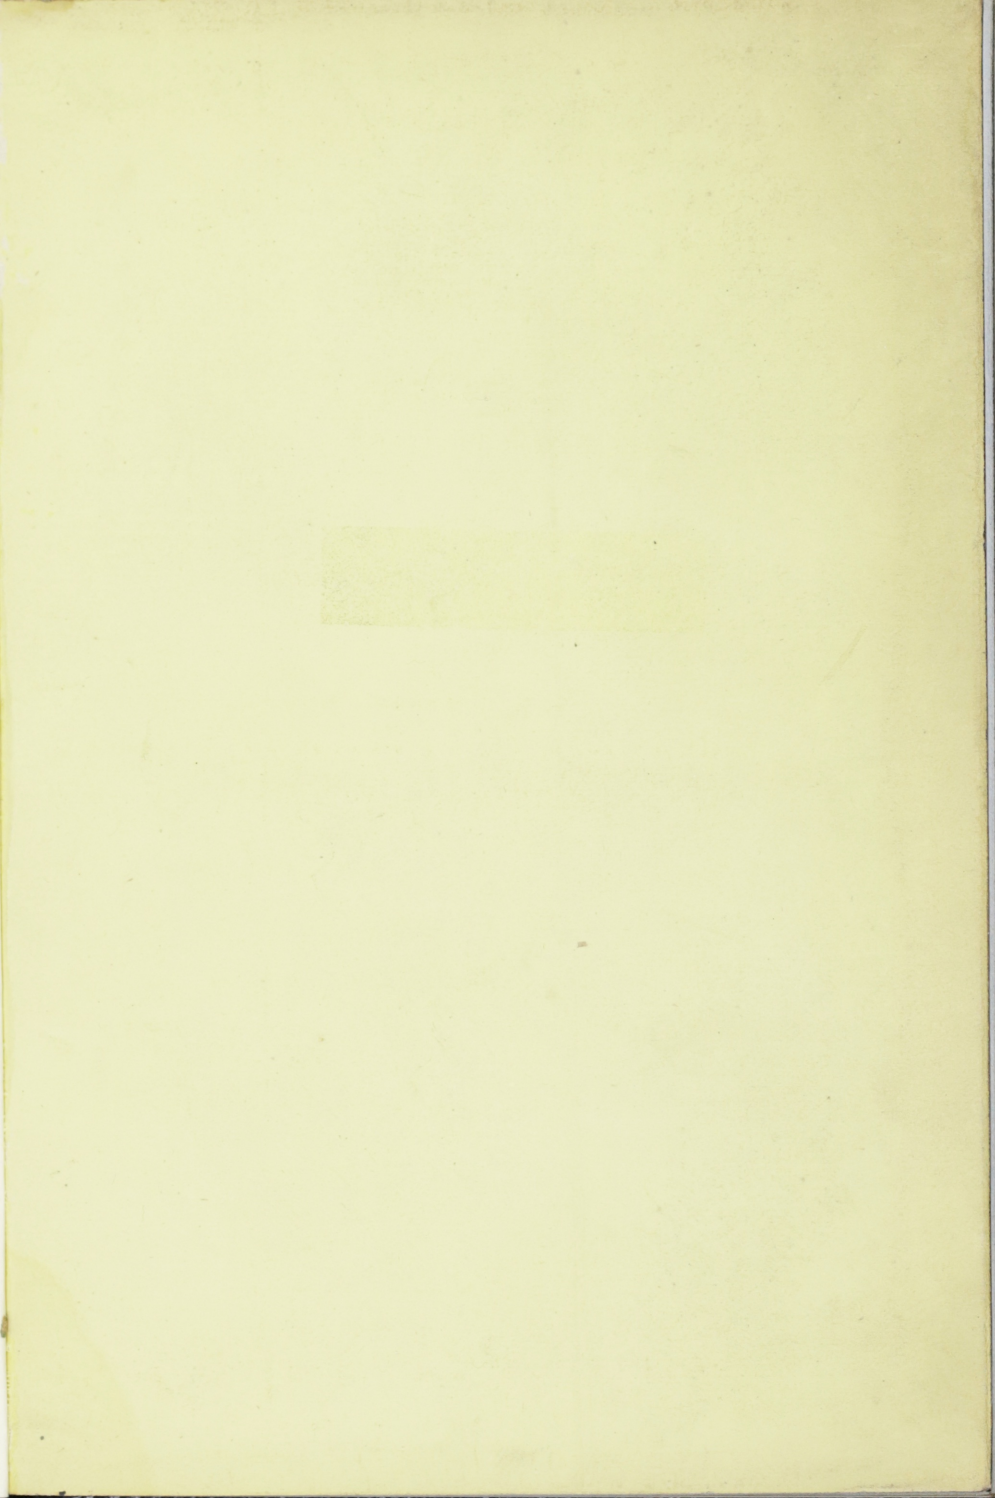

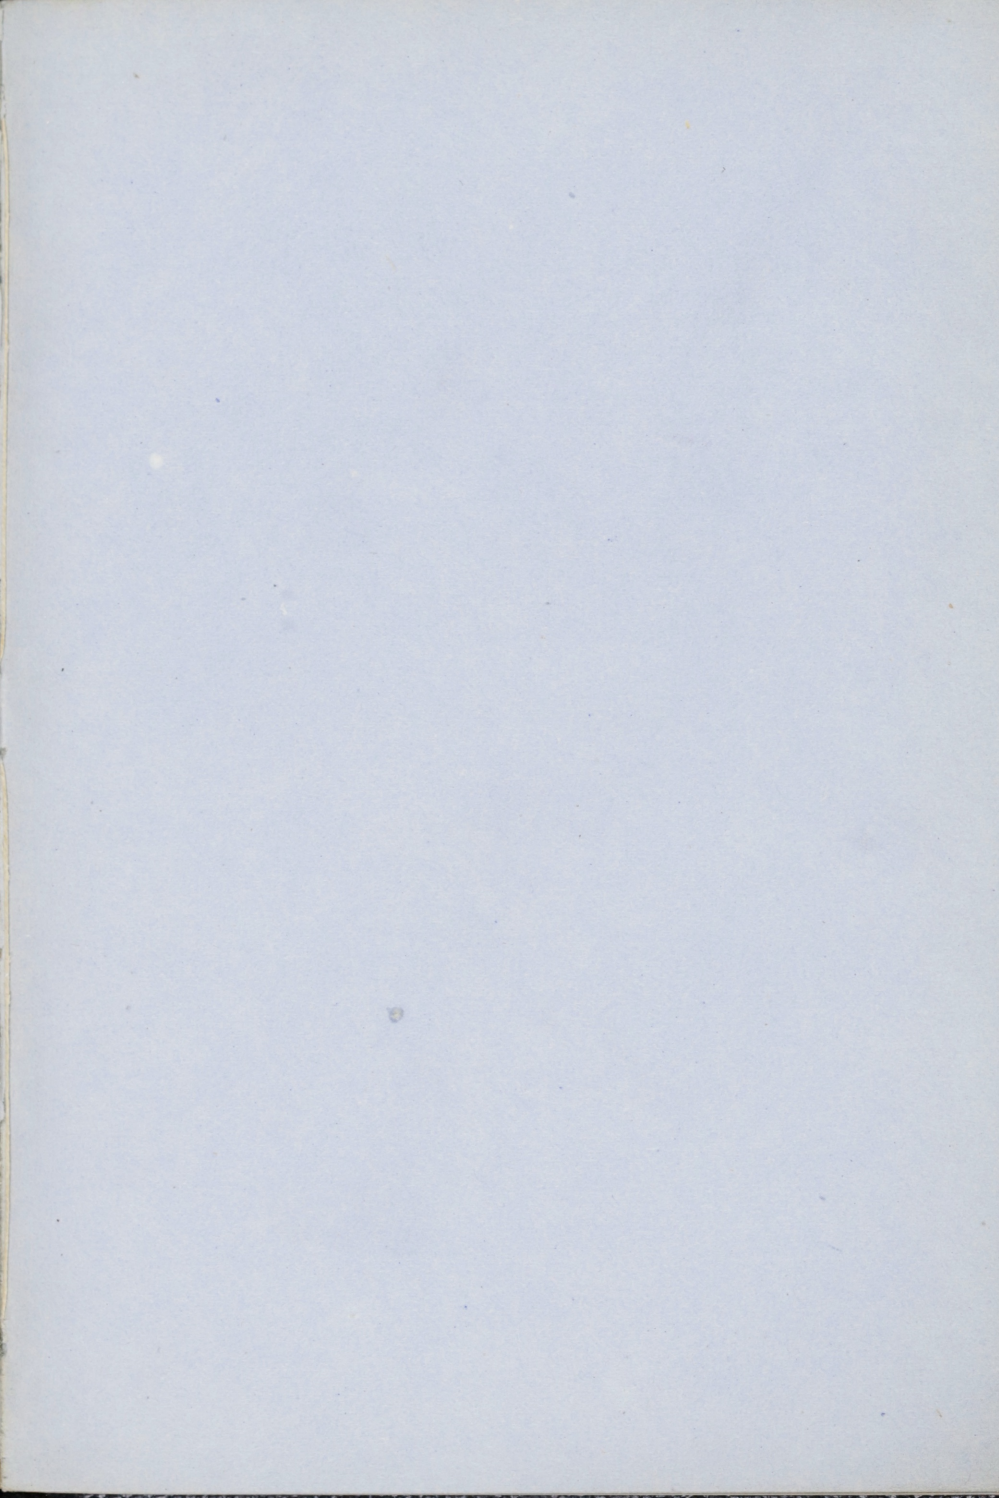

LLOYD'S REGISTER

OF

BRITISH AND FOREIGN

SHIPPING.

LLOYD'S REGISTER

OF

BRITISH AND FOREIGN

SHIPPING.

LLOYD'S REGISTER
OF
BRITISH AND FOREIGN
SHIPPING.

From 1st JULY, 1860, to the 30th JUNE, 1861.

ESTABLISHED 1834.



LONDON:

PRINTED BY COX & WYMAN, 74 & 75, GREAT QUEEN STREET,
LINCOLN'S-INN FIELDS.

1860.

TABLE OF CONTENTS OF REGISTER BOOK.

LIST OF THE COMMITTEE.
LIVERPOOL BRANCH.
LIST OF SURVEYORS.
LIST OF SUBSCRIBERS.
INDEX TO THE RULES AND REGULATIONS.
RULES AND REGULATIONS.—WOOD SHIPS.
TABLE A.—MATERIALS ALLOWED FOR SHIPS OF THE SEVERAL GRADES.
TABLES B. C.—DIMENSIONS OF TIMBERS, PLANKING, BEAMS, &c.
TABLES D. E.—SIZES OF BOLTS REQUIRED AND NUMBER OF KNEES
REQUIRED.
TABLE F.—DIMENSIONS OF IRON KNEES AND RIDERS FOR BRITISH
NORTH AMERICAN BUILT AND FIR SHIPS.
RULES AND REGULATIONS.—IRON SHIPS.
TABLE G.—DIMENSIONS OF FRAME, PLATING, &c. FOR IRON SHIPS.
TABLES OF TIMBERING AND PLANKING.
FORM OF REPORT OF SURVEY FOR CLASSIFICATION.
FORM OF REPORT FOR IRON SHIPS.
FORM OF REPORT OF ANNUAL SURVEY.
FORM OF CERTIFICATES OF CHARACTER.
FORM OF CERTIFICATES OF MACHINERY FOR VESSELS NAVIGATED BY
STEAM.
KEY TO THE REGISTER.
SCALE SHEWING THE SHIFTS OF PLANK REQUIRED.
TABLE OF SHIPS CLASSED IN THE REGISTER-BOOK.
ALPHABETICAL LISTS OF VESSELS CLASSED.
LIST OF VESSELS CLASSED BUT NOT REGISTERED.
ALPHABETICAL LISTS OF ADDITIONAL SHIPS CLASSED.
APPENDIX.
LIST OF THE COMMITTEE OF LLOYD'S.
LIST OF AGENTS TO LLOYD'S.
COPIES.—RESOLUTIONS AMENDING THE RULES, PASSED DURING THE
YEARS 1859-60
NOTICE.—CHARACTERS OF SHIPS OF THE Æ CLASS NOT SURVEYED
SINCE 1858 TO BE OMITTED.
TABLE SHEWING THE DATES TO WHICH THE REGISTER-BOOK IS POSTED.

Committee of Management

1880-1881

Wm. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer

Wm. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer
 J. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer
 J. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer

J. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer

J. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer

J. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer

J. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer

J. H. Lawrence, Esq., Chairman
 J. H. Lawrence, Esq., Secretary
 J. H. Lawrence, Esq., Treasurer

Committee of Management.

1860—1861.

THOMAS CHAPMAN, Esq., F.R.S., F.S.A., *Chairman.*

DUNCAN DUNBAR, Esq., *Deputy Chairman.*

WILLIAM C. HARNETT, Esq. F.S.A., *Chairman of the Sub-Committees of Classification.*

JOHN HARRISON ALLAN, Esq.

GEORGE ALLFREY, Esq.

JOHN CLEVERLY, Esq.

GEORGE DENNY, Esq.

WILLIAM DREW, Esq.

GEORGE FENNING, Esq.

NATHANIEL GOULD, Esq., F.S.A.

GEORGE HANKEY, Esq.

GEORGE HANSON, Esq.

SAMUEL HARPER, Esq.

GEORGE MARSHALL, Esq.

ALEXANDER NAIRNE, Esq.

WILLIAM PHILLIPPS, Esq.

JOHN POOLE, Esq.

ANTHONY RIDLEY, Esq.

~~JOHN ROBINSON, Esq. deceased~~

WILLIAM FLINT SADLER, Esq.

W. WILSON SAUNDERS, Esq. F.R.S.

WILLIAM HENRY TINDALL, Esq.

GEORGE WHITMORE, Esq.

GEORGE F. YOUNG, Esq.

CHARLES RICHARD HARFORD, JUN., Esq.

THOMAS BARING, Esq., M.P., *Chairman of the Committee of Lloyd's.*

JAMES ANDERSON, Esq. *Chairman of the General Ship-Owners' Society.*

ALSO

THE CHAIRMAN OF THE LIVERPOOL COMMITTEE.

THE DEPUTY-CHAIRMAN DITTO.

THE CHAIRMAN OF THE ROTATION COMMITTEES, DITTO.

Trustees.

GEORGE ALLFREY, Esq.

THOMAS CHAPMAN, Esq.

DUNCAN DUNBAR, Esq.

NATHANIEL GOULD, Esq.

GEORGE HANSON, Esq.

JOHN ROBINSON, Esq.

Bankers.

BANK OF ENGLAND.

Solicitor.

THOMAS OLIVERSON, Esq., FREDERICK'S PLACE, OLD JEWRY.

Secretary.

GEORGE B. SEYFANG, Esq.

No. 2, White Lion Court, Cornhill,
London, 1st July, 1860.

LIVERPOOL BRANCH.

1860-61.

COMMITTEE.

THOMAS CHILTON, Esq. *Chairman.*

WILLIAM J. LAMPORT, Esq. *Deputy Chairman.*

ROBERT CARLYLE, Esq.

T. TOLSON CLINT, Esq.

GEORGE R. CLOVER, Esq.

ROBERT NORRIS DALE, Esq.

WENSLEY TYRRELL JACOB, Esq.

GEORGE KENDALL, Esq.

PETER M. MILLER, Esq.

JOSEPH MONDEL, Esq.

WILLIAM ROTHERAM, Esq.

HUGH GASKELL SUTTON, Esq.

MEMBERS OF THE COMMITTEE EX-OFFICIO.

CHARLES LANGTON, Esq., Chairman of the Underwriters' Association.

JAMES SMITH, Esq., Chairman of the Shipowners' Association.

THOMAS B. ROYDEN, Esq., Chairman of the Shipbuilders' Association.

BANKERS.

MESSRS. ARTHUR HEYWOOD, SONS, & Co.

SECRETARY.

MR. ROBERT E. MUDGE.

SURVEYORS.

MR. WILLIAM POPE.

MR. GEORGE WINRAM.

MR. WILLIAM PERKINS

MR. SENHOUSE MARTINDALE.

MR. J. WIMSHURST, *Assistant Surveyor.*

Office, 14, Tower Chambers.

S U R V E Y O R S.

The Surveyors at the following Ports are exclusively the Officers of the Society, and are not permitted to engage in any other business or employment whatsoever.


LONDON	James Martin. Joseph Horatio Ritchie. Thomas W. Wawn. Bernard Waymouth. W. C. Davey. John F. Light. W. T. Mumford, <i>Assist. Surveyor.</i>
Aberdeen, with Banff, Peterhead, and Fraserburg	William Wallis.
Bangor, with Carnarvon and Holyhead ...	John Johns, jun.
Bideford, Barnstaple, and Appledore ..	Benjamin Rogers Pyke.
Belfast, with Dublin	Alexander Linton.
Bristol, with Chepstow, and the River Wye	Thomas Congdon.
Channel Islands (residing at Jersey) ...	William C. Goss.
Dundee, with Arbroath, Montrose, and Perth	Thomas Alexander.
Greenock	John Barr Cumming. John H. Boulds.
Glasgow	Richard Robertson. Thomas Luke.
Hartlepool, Stockton, and Middlesbro' with Whitby and Scarborough (residing at West Hartlepool)	S. P. Gladstone. William Davidson, <i>Assistant Surveyor.</i>
Hull, Gainsborough, Goole, Selby, Thorn, and Grimsby	Henry Adams.
Leith, and Ports in the Frith of Forth, with Berwick-upon-Tweed	Walter Paton.
Liverpool, with Lancaster and all intermediate places, the River Mersey, Chester, and River Dee; also the Isle of Man.	William Pope. George Winram. William Perkins. Senhouse Martindale. J. Wimbushurst, <i>Assistant Surveyor.</i>
Miramichi and Northern District of New Brunswick, with Ports in the Gulf Shore of Nova Scotia	Samuel Lapthorn.
Newcastle, with North and South Shields (office North Shields)	Matthew Poppelwell. Samuel Pretious. John Maxwell.
Prince Edward Island (residing at Charlotte Town)	Richard Sloggett.
Quebec and the River St. Lawrence ...	Charles R. Coker.
St. John, New Brunswick	John Tucker. William Crowhurst, <i>Assistant Surveyor.</i>

SURVEYORS—(continued).

<i>Southampton and South Coast, including the Isle of Wight, Weymouth, and Bridport</i>	} Benjamin Martell.
<i>Sunderland</i>	{ Thomas Boyes Simey. Thomas Lawrence. E. R. Couchman. Alfred Darling. Thomas Adamson. F. W. Bonniwell. } Assistant Surveyors.
<i>Western District (residing at Plymouth)...</i>	W. R. Mulley.
<i>Whitehaven, Workington, Harrington, and Maryport, with Dumfries and Annan; also Ulverstone and Barrow.</i>	} John H. Tiltman (Office, Whitehaven).

The SURVEYORS at the following PORTS do not hold appointments as
the exclusive Servants of the Society.

<i>Aberystwith and Aberdovey</i>	William Julian.
<i>Blyth, with Hartley</i>	Richard Lough.
<i>Cardigan, with New Quay, Aberayron, and Llandewey</i>	} David James.
<i>Cork, with Queenstown, Kinsale, and Limerick</i>	} George Wright.
<i>Dartmouth, with Salcombe and Brixham</i>	William Newman.
<i>Falmouth</i>	F. H. Thomas.
<i>Galway</i>	Henry Townsend.
<i>Gloucester</i>	J. G. Francillon.
<i>Guernsey</i>	Peter Collas.
<i>Ipswich and Harwich</i>	William Taylor, Jun.
<i>Londonderry</i>	James McGhee.
<i>Lynn</i>	William Garland.
<i>Milford, with Pembroke</i>	David Vaughan.
<i>Newport, Monmouthshire, with Cardiff</i> ...	Henry Haynes.
<i>Newry, Carlingford, and Dundalk</i> ...	Leonard Watson.
<i>Orkneys</i>	James Cromarty.
<i>Penzance, St. Ives, and Helston</i> ...	W. D. Mathews.
<i>Portmadoc and Barmouth</i> ...	William Jones.
<i>Ramsgate and Margate, with Deal and Dover</i>	} John Cuttler.
<i>Scilly Isles</i>	Hugh Tregarthen.
<i>Sligo</i>	William Pollexfen.
<i>Swansea, with Neath and Llanelly</i>	W. N. Johnson.
<i>Teignmouth and Torquay</i>	Samuel Cockings.
<i>Topsham and Exeter</i>	John Holman.
<i>Waterford</i>	William D. Price.
<i>Wexford</i>	Mark Devereux.

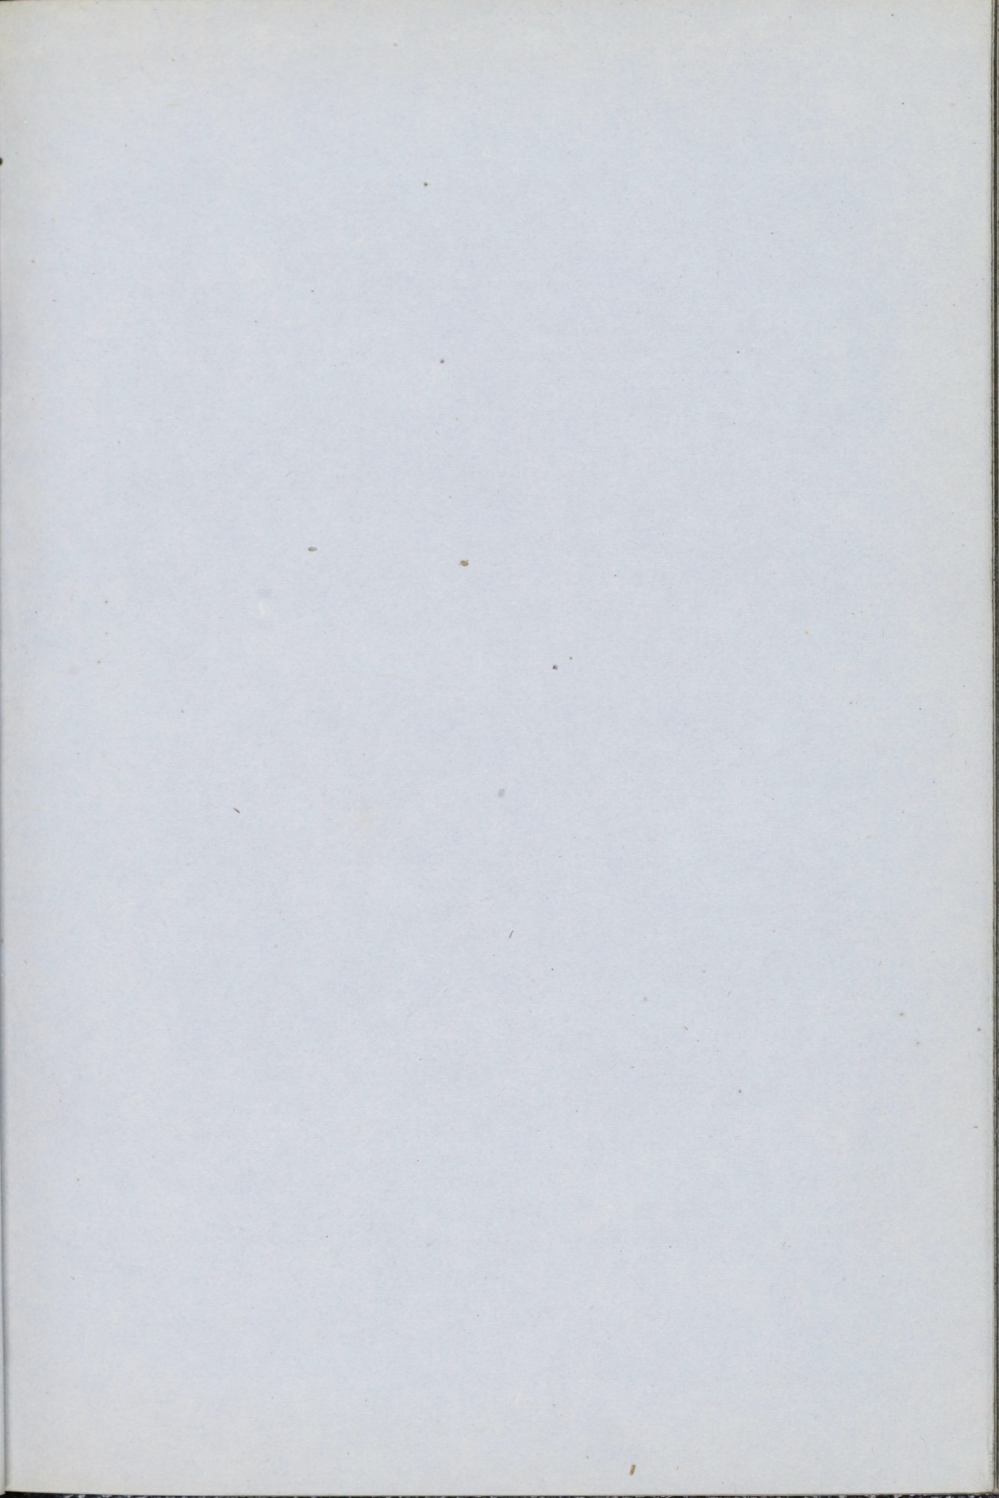

INDEX

TO THE

RULES AND REGULATIONS.

1860-61.

	Sec.
Anchors, number and weight	71, 72
Appointments vested in the Committee	13
Ballot, all elections to be made by	15
Beams, sizes to be regulated by their length amidships	40
—— Spruce or Yellow Pine, increased size	40
—— Deck or Hold, Spacing, and how fastened	41
—— Orlop, for Ships of deep hold	41
—— ——— see foot note to Table C. after page 32	—
—— for third or upper deck	41
Bilges, how to be secured	46
Boats, quality and number	75, 82
Boilers, Steamers, examination	78
Bolts, description and sizes, Table D., after page 32	46
—— Copper, Yellow Metal, or Galvanized Iron	46
—— in the limber strakes to be through and clenched	46
—— exceptions to ditto	46
—— Butt and Bilge	46
—— ditto deficient	47
Butts of Planking	39, 45, 46, 62
—— Timbers	37
Bye-Laws, power to make	17
Cables, quality and quantity	73, 74
—— Chain, Certificate of testing to be produced to surveyors	73
—— ——— to be marked with the amount of strain applied	73
—— ——— periodical examination of	73
Cant-timbers, stepping of heels, and fastening	41
Caulking bottoms of Ships	67

	Sec.
Ceiling-plank, shifting and fastening	44
Certificates of Character	29
——— Form	page 55
Characters of Ships, how assigned	18, 31
——— definition	31, 60, 61, 64, 66
——— Notice of reduction of	21, 60
Chocks	37, 50
Classification, confirmation of character	18
——— Certificates	29
Colonial-built Ships	41, 62, 63
——— to be considered as part Iron-fastened	62
Committee, how constituted	8
——— <i>ex-officio</i> Members	8
——— Annual retirement	9
——— Vacancies to be filled up	9, 10
——— Election of Chairman and Deputy Chairman	11
——— Special Meetings	14
——— to assign character	18, 31
——— Classification, rotation	12
——— ditto Chairman	11
——— Members excluded if interested in ship	16
Continuation of Ships, A	54
——— ditto, after Restoration	59
——— ditto, to be laid on Blocks, or placed in Dry-Dock	54
——— ditto, exception to Stripping, when recently Coppered	54
Crutch, required for Vessels 150 tons and above	41
Date of Ships' build	33
Decks, fastenings, &c.	41, 46
Double Floors, thick strakes to be worked	39
Doubling of Ships, regulation	67, 68
——— „ built in India	70
Dowels required when the heads and heels of Timbers are square	37
——— diameter required	37
Fastenings, nature and description	46
——— additional period allowed when the whole are of	46
Copper or Yellow Metal	46
——— Knees and Riders	41, 62
——— Iron or Copper	62, 69
——— Ships built in India	70
——— exception to Iron	70

Fees, Table of	Sec. 22
— Special Surveys	25, 28
— to Surveyors prohibited	24
Forecastles, topgallant	37, 38, 41
Furrans not allowed	see foot note, Table B	46
Galvanized Iron Bolts and Nails	46
Garboard Strakes, thick, how bolted	46
Iron Bolts	62, 69, 70
Iron Ships, Rules for the building of	pages 33 to 42	...	—
———, form for reporting	pages 52 to 54	...	—
Keel, Rabbets of, foot note Table B.	after page 32	...	—
Knees of Ships, No. and description, Table F.	after page 32	...	41
——— „ Colonial-built, and Fir Ships	62
Launching, date of, and when characters lapse	59
Limber Strakes, how bolted	46
Masts, Yards, &c.	71
Materials to be used in Ships Classed A in red	60
Nails or Bolts of Copper, Yellow Metal, or Galvanized Iron, for Decks	46
Orlop Beams required for Ships of deep hold	41
Periodical Surveys	34, 60, 61, 63, 65, 77	...	43, 44
Planking, quality	46
——— to be fastened according to width	39, 45, 62
——— distance of the Butts	45
——— ditto exceptions	after page 32
——— thinner plank at Short Hoods, see foot note to Table B.	39, 62
Plates, diagonal, on Frames of Ships	41
Pointers	37, 38, 41
Poops and Forecastles	41
——— not to exceed three-fifths the length of upper deck	37
——— Materials to be used	38
——— Scantlings for	41
——— Forecastles, and Ships with three decks...	37
Quarter Decks, raised	1
Register Books, formerly printed	2
——— printed annually	6
——— periodically posted	7
——— Supplements	3, 4, 5
——— Subscriptions	

Repairs, Notice to be given in writing	Sec. 22
Repairs, Appeal against	23
—— with inferior or second-hand materials	54, 56, 58, 60		
Reports of Survey	36
—— access to them	19
—— Form	pages 50 to 55		—
Restoration of Ships to A, First rule	55, 56
—— ditto Second rule	57, 58
Rider Keelsons, how fastened	39, 62
Riders, Iron	41
—— — for Colonial-built and Fir Ships	62
Rigging, condition	pages 30, 32		—
Rudder, Materials for, see Table A.	after page 32		—
—— Pintles of, see Table D.	after page 32		—
Rules, Six months' notice of Alteration	17
—— price of a set	30
Scantlings of Timber, Planking, Beams, see Table B.	after page 32				38, 39
Shifts of Planking	39, 45, 62
—— Timber	42
Ships (A) definition	33
—— Limitation of term	34
—— Surveys while building	35
—— Not built under survey	35, 51, 53
—— ditto, to be placed in Dry Dock, or laid on Blocks	51
—— ditto, opening required for Examination	51
—— Built not in accordance with the Rules	31
—— Built under a roof	52
—— wholly fastened with Copper or mixed metal Bolts	46
—— Date of launching and lapsing of character	59
—— proof of place, and date of build to be produced	33
—— India built, Fastenings	70
—— built of Iron	See page 33		—
—— Foreign built, classification	20
—— Colonial-built, ditto	20, 62, 63
—— ditto, to have Iron Plates (diagonal) on Frame, and to have Shelves and Waterways to each tier of Beams	62
—— ditto, opening for Survey, fastenings, &c.	51, 62, 63
—— Fir	62
—— of a length exceeding five or six times their breadth, to have Iron Plates (diagonal) on Frame, and to have Shelves and Waterways to each tier of Beams	39, 62

	Sec.
Ships (A) if exceeding six times their breadth, to have rider or sister keelsons	39, 62
— „ 12 years	37
— „ 11 „	49
— „ 10 „	50
— „ lower grades	51
— „ to be surveyed within one half the period assigned, or every 4 years	34
— „ Continuation on A	54
— „ ditto, after Restoration	59
— „ Restoration to A, First rule	55, 56
— „ Restoration to A, Second rule	57, 58
— „ will be marked " <i>lapsed</i> " at end of terms assigned ...	59
— (A in red) definition	31, 60
— „ Special Survey required	60
— „ exceptions to obtaining this character	60
— Notice of reduction of character	21, 60
— Diphthong, (Æ) definition	31, 61
— (E) definition	31, 64
— (I) definition	31, 66
Ships' bottoms to be caulked	67
Society, Members of the	3
Special Surveys on ships building allowed	35
— — on ships damaged, &c.	21, 23
— „ Fees	25, 28
Spirketting of Poops	37
Steam Vessels, rules	77, 78, 79, 80, 81, 82
— Examination of Machinery	78
— Stores	81
— Form of Certificate for Machinery	page 56
Stores, complete Figure 1	76
— defective or deficient, Figure 2	76
Subscriptions, annual	3, 4, 5
Surveys of ships, periodical	34, 60, 61, 63, 65, 77
— while building	35
— by an Exclusive Officer of the Society	35, 51, 54, 60
— by two Surveyors	51, 54, 55, 57, 60
— Forms for reporting ditto	pages 50 to 55
Surveyors not to class ships	31
— may be employed on special surveys	25, 28
— to give notice of reduction of character or of repairs required	21, 22, 60

Surveyors, appeal against their requisition	Sec.	23
—— prohibited from taking Fees for own use, &c.		24
Tables of Scantling of Timbers, Planking, Beams, &c. after page 32					—
—— Timbering and Planking	page 32	—
Table of Dimensions for Iron Ships	after page 42	—
Timber and Space,	see Table B and at	39
Timbers to be well squared, and free from Sap		37
—— if not well squared		50
—— each set to be framed-bolted together throughout their lengths	37,	50			
—— Butts and thickness		37
—— Shifts		42
—— Inferior or second-hand, in repairs	54, 56, 58, 60	
Tonnage, gross register adopted		32
Treenails, quality and make		46
—— one half to be through		46
Wales, breadth of		45
Waterway, faying surface against timbers, see Table B.					—
Workmanship, Report of Survey	page 51	—
Windlass, Materials for, see Table A,	after page 32	—
—— Stripping wood linings for examination	...	34,	54, 56, 58, 60		

LLOYD'S REGISTER

OF

BRITISH AND FOREIGN SHIPPING.

RULES AND REGULATIONS.

1. THE operations of the Societies of the two Register Books of Shipping formerly printed for the use of Merchants, Ship-Owners, and Underwriters, having ceased in the year 1834, this Society was then established for the purpose of obtaining a faithful and accurate Classification of the Mercantile Shipping of the United Kingdom, and of the Foreign Vessels trading thereto, and for the government of which the following Rules and Regulations have been from time to time adopted.

2. A Register Book to be printed annually for the use of Subscribers.

3. Each person subscribing the sum of Three Guineas per annum (or such other sum as the General Committee may fix), to be considered a Member of the Society, and entitled *for his own use* to one copy of the Register Book.

4. The subscription of Public Companies, or Public Establishments (not being engaged in Marine Insurance), to be Ten Guineas per Annum.

5. The subscription of Marine Insurance Companies to be regulated by the Committee on special application, in each case, but not to be less than Ten Guineas per Annum.

6. The Register Book to be periodically posted throughout the year.

7. For the convenience of Subscribers not resident in London, a Supplement, containing the additions to, and corrections made in, the Register Book, to be printed fortnightly in such convenient form, as to admit of its transmission by Post, so that such parties may be furnished, from time to time, with the latest and most complete information.

8. The superintendence of the affairs of the Society to be under the direction of a Committee in London, of twenty-four members, consisting

of an equal proportion of Merchants, Ship-Owners, and Underwriters. The Chairman for managing the affairs of Lloyd's, and the Chairman of the General Ship-Owners' Society, and also the Chairman and Deputy Chairman of the Liverpool Committee, and the Chairman of the Rotation Committees for the time being, to be, *ex officio*, Members of the Committee.

9. Six of the Members, namely, two of each of the constituent parts of the Committee, to go out annually by rotation, but to be eligible to be re-elected.

10. The vacancies so arising to be filled up by the election of two Underwriters and one Merchant by the Committee for managing the affairs of Lloyd's, and two Ship-Owners and one Merchant by the Committee of the General Ship-Owners' Society.

11. The Committee to appoint from their own body, annually, a Chairman and Deputy Chairman, and also a Chairman for a Sub-Committee of Classification.

12. The Committee to appoint a Sub-Committee of Classification, to be so regulated that each Member of the General Committee may, in rotation, take his turn of duty therein throughout the year.

13. The Secretary, Clerks, and Servants of the Society, and the Surveyors, to be appointed by, and be under the direction of the General Committee.

14. Special meetings to be convened by order of the Chairman, or Deputy Chairman, or on the requisition of any three members.

15. All elections and appointments to be made by ballot.

16. No Member of the Committee to be permitted to be present on the decision of the classification of any ship of which he is the owner, or wherein he is directly or indirectly interested.

17. The Committee to be empowered to make such By-laws for their own government and proceedings as they may deem requisite, not being inconsistent with the original Rules and Regulations under which the Society was established; but no new Rule or By-law to be introduced, nor any Rule or By-law altered, without special notice being given for that purpose at the meeting of the Committee next preceding that at which such Motion is intended to be made; such notice to be inserted in the summons convening the meeting. No new Rule, or alteration in any existing Rule, materially affecting the classification of ships, to take effect until the expiration of six months from the time it shall have been determined upon.

18. All Reports of survey to be made in writing by the Surveyors according to the forms prescribed, and submitted for the consideration of the General Committee, or of the Sub-Committee of Classification; but the

character assigned by the latter to be subject to confirmation by the General Committee.

19. The reports of the Surveyors, and all documents and proceedings relating to the classification of ships, to be carefully preserved, and parties proving themselves to be interested therein, to have access to the same under the direction of the Chairman or Deputy Chairman.

20. Foreign ships, and ships built in the British possessions abroad where there is not a Surveyor (*See also Section 51*), to be surveyed on their arrival at a port in the United Kingdom; but a due regard is to be had to the circumstance of their having been exempted from the supervision while building to which all British ships are subjected, and the character to be assigned to them is to be regulated according to their intrinsic quality, and from the best information the Committee can obtain.

21. In every case in which the Character assigned to a ship may be proposed, on survey, to be reduced, notice is to be given in writing to the Owner, Master, or Agent, with an intimation that if the reduction be objected to, the Committee will be ready to direct a special survey, on the Owner, Master, or Agent, agreeing to pay the expenses attending the same, provided on the said survey there shall appear sufficient ground for the proposed reduction.

22. When the Surveyors consider Repairs to be requisite, they are respectfully to communicate the same in writing to the Owner, Master, or Agent, and if such repairs be not entered upon within a reasonable time, a corresponding report is to be made to the Committee for their decision thereon.

23. Parties considering the repairs suggested by the Surveyor to be unnecessary or unreasonable, may appeal to the Committee, who will direct a special survey to be held; but should the opinion of the Surveyor be confirmed by the Committee, then the expense of such special survey is to be paid by the party appealing.

24. The Surveyors to the Society not to be permitted (without the especial sanction of the Committee), to receive any Fee, gratuity, or reward whatsoever for their own use or benefit, for any service performed by them in their capacity of Surveyors to this Society, on pain of immediate dismissal.

25. The Surveyors will be directed to attend on Special Surveys of ships while building or under damage or repair, when required by Merchants, Ship-Owners, or Underwriters; the charge for which is to be regulated according to the nature and extent of the service performed. In all cases, the application for the assistance of the Surveyors must be made in writing addressed to the Secretary.

FUNDS.

26. The Funds to be under the authority and control of the Committee, and a statement of the Receipts and Expenditure to be annually printed for the information of the subscribers.

27. The following Fees to be charged to the Owners of ships prior to their vessels being classed and registered in the book.

I.

For Entering and Classing Ships, and for Entering and Classing Ships surveyed for Continuation, or repaired for Restoration.

For each Ship	under 100 Tons ...	£1 0 0
Ditto ...	of 100 Tons and under 200	2 0 0
Ditto ...	200 — 300	3 0 0
Ditto ...	300 — 400	4 0 0
Ditto ...	400 and upwards	5 0 0

II.

For Registering Repairs.

For each Ship	under 300 Tons ...	£0 10 0
Ditto ...	of 300 Tons and under 500	1 0 0
Ditto ...	500 — 1000	2 0 0
Ditto ...	1000 and upwards	3 0 0

For Re-classing Ships (except when repaired) the Characters of which have been expunged, or change of Owners.

For each Ship	under 200 Tons ...	£0 10 0
Ditto	200 — and above	1 0 0

Special Surveys.

28. For ships built under the special superintendence of the Surveyors (to entitle them to the distinctive mark ∇) 1s. per ton.

For Surveys for damage, or for other Surveys, held at the request of the Owners, and for the Survey of Ships for Restoration, Continuation, or the character A in red, a charge (in addition to the Fee for entry) will be made, according to the nature and extent of the service performed. All repairs which may be required on the surveys above referred to, must be performed under the superintendence of the Society's Surveyors.

29. Certificates of Character, of the Form No. 7, signed by the Chairman of the General Committee, or by the Chairman of the Sub-Committee of Classification, and countersigned by the Secretary, will be granted on application; the charge for which will be as follows:—

For Ships under 200 Tons	2s. 6d. each
200 — and above	5s. each.

For Ships built under Special Survey, on their

First Classification Gratis.

30. Rules, each copy 2s. 6d.

CHARACTERS.

31. The Characters to be assigned to ships to be, as nearly as possible, a correct indication of their real and intrinsic qualities,* and to be in all cases fixed (not by the Surveyors, but) by the Committee, after due consideration of the Reports of the Surveyors and such other documents as may be submitted to them, and will be distinguished as follows:—

SHIPS A

To consist of new ships, or ships Continued, or Restored. *Vide Sections 34, 54, 55, 57.*

SHIPS A, in Red,

To consist of ships which have passed the period assigned on the original survey, or Continuation, or Restoration; and also of ships not having had an original character, and which are found on survey of superior description, fit for the conveyance of dry and perishable goods, *to and from all parts of the world.* *Vide Section 60.*

SHIPS Æ

To consist of ships which are found on survey fit for the safe conveyance of dry and perishable goods on *shorter voyages.* *Vide Section 61.*

SHIPS E

Will comprise ships which shall be found on Survey fit for the conveyance of cargoes not in their nature subject to sea damage *on any voyage.* *Vide Section 64.*

SHIPS I

To consist of ships fit to carry cargoes not liable to sea damage *on shorter voyages.* *Vide Section 66.*

32. In all cases in which the application of the rules must necessarily be regulated by the ship's admeasurement, the *gross register tonnage* is to be adopted.

RULES FOR CLASSIFICATION.

SHIPS A

33. Will consist of new ships and those which have not passed a prescribed age, provided they are kept in a state of complete repair and efficiency. The character A will not, however, be granted to any vessel, unless satisfactory evidence of the date of build and place where built is produced.

* Ships which are not built in accordance with the principles of the Society's Rules will be marked in the Register Book thus, "*Expl. (B.S.)*," denoting that they are built experimentally, and are classed subject to being surveyed biennially.

34. The number of years to be assigned for this Character to be determined with reference to the original construction and quality of the vessels, the materials employed, and the mode of building; and their continuance for the time so assigned to depend upon its being shown by occasional surveys (annually if practicable) that their efficiency is duly maintained. In all cases the windlass is to be examined by unhooking and stripping the wood linings within a period not exceeding one-half of that originally assigned. The characters of ships A will be struck out of the Register, unless re-surveyed within a period of four years from the *date of last survey*,—or, in the case of ships exceeding the eight years' grade, within *one-half of the time* assigned. After the expiration of the periods prescribed, ships will be permitted to Continue in the character A, or may be Restored thereto, for a further limited period, on complying with the conditions hereinafter prescribed in Sections 54, 55, and 57.

35. New ships are to be surveyed while building, by the Surveyors to this Society, in the following three stages of their progress, or they will be liable to lose one year of the period to which they might otherwise be entitled. (*See Section 53.*) Ships intended to be built under *special survey*, must be placed under the Surveyor's inspection from their commencement, so that all parts of the timbers, deadwood, keel, stem, &c., may be examined.

First.—When the Frame is completed, timbers dubbed fair inside and outside ready to receive planking, and before any planking is wrought.

Second.—When the Beams are put in, but before the Decks are laid, and with at least two strakes of the plank of the ceiling between the lower deck and the bilge unwrought, to admit of an examination of the inner surface of the plank of the bottom.

Third.—When completed, and before the plank be painted or payed.

All Ships for which a higher character than Ten Years' A may be claimed, must undergo a Survey by a Surveyor who is an exclusive Officer of the Society, twice at least, while building; namely, at the first and at the second stages of their progress as above prescribed. Due notice must be given by the Builder or Owner of their being ready for this additional survey.

36. A full statement, agreeably to Form No. 4, of the dimensions, scantlings, &c. of all new ships, verified by the builder, is to be transmitted by the Surveyor, and to be kept as a record in the office of the Society.

RULES TO BE OBSERVED IN BUILDING SHIPS.

37. The whole of the Timber to be of good quality, of the descriptions

shown in Table A as applicable to the several terms of years for which ships so constructed may respectively be appointed to remain on the character A. The stem, stern post, beams, transoms, apron, knightheads, hawse timbers, and keelson of ships claiming to stand *twelve years*, to be entirely free from all defects; the frame to be well squared and free from sap; each set of timbers to be frame-bolted together throughout their entire lengths. The butts of the timbers to be close, and not to be less in thickness than one-third of the entire moulding at that place, and to be well chocked with a butt at each end of the chock. In all cases in which the heads and heels of the timbers shall be *square*, in vessels intended for the twelve years' grade, a dowel (to be in diameter from one-fourth to one-third of the moulding of the timber) must be introduced into the ends of such timbers in order to connect them together. In the construction of top-gallant forecasties, and poops, the timbers must be of the same materials as are required by the Rules (Table A) for the top-timbers of the frames of ships according to the several terms of years appointed for such ships to remain on the character A, all the said timbers to extend to the planksheer. All the outside planking of top-gallant forecastle, and the sheerstrakes, planksheers, and spirketting of top-gallant forecastles and poops must be of the materials required by the Rules (Table A) for the topsides of the said ship; and the shelf and clamps of poops and top-gallant forecastle may be of the same quality as those allowed in Table A for the shelf and clamp of the upper deck. All the beams of top-gallant forecastle, and the mast beams, breast beams, and transom beams of poop, to be of the materials required by the Rules (Table A) for the beams of the said ships; the remainder of the beams and the water-way of the poop, and the remainder of the planking of poop and top-gallant forecastle may be of cedar, mahogany, Baltic or American red pine, pitch pine, larch, hackmatack, tamarac, or cownie, and rock elm for such remainder of beams only, and yellow pine or American white spruce in ships below the seven years' grade.

This Rule does not apply to raised quarter decks, the materials of which are required to be of the same quality as those named in the Table for the main body of the ship.

38. The Scantlings of the timbers, keelson and keel, thickness of planking, &c. are not to be less than those shown in Table B., following page 32.

In the inside and outside planking, waterways, planksheers, and flat of deck of full poops* and top-gallant forecastles, a reduction of *one-fourth*

*Parties desirous of making any alteration in the construction of Poops, with a view to diminishing the weight (but preserving the requisite strength), may submit their plans for the Committee's consideration and approval.

from the thickness required by the Table B for such planks in the range of the upper deck in ships with two decks, will be allowed; and in the siding and moulding of the top timbers and beams of full poops and top-gallant forecastles, a reduction of *one-fifth* will be allowed.

In the inside and outside planking, waterways, planksheers, and flat of deck of raised quarter decks, a reduction of *one-fifth* from the thickness required by the Table B for such parts in the range of the upper deck in ships with two decks, will be allowed.

39. The intermediate dimensions for the scantling of timbers between the floor heads and the gunwale to be regulated in proportion to the distance from the two points. Should the timber and space be increased, the siding of the timbers to be increased in proportion. Whenever ships are built with double floors, thick strakes (see Table B) must be worked inside, to extend from the lower part of the short floor-head chocks to the upper part of the long floor-head chocks, and be well bolted through and clenched, *with one bolt at the head of each long and short arm of floors, and at the heel of each first and second foothook which come upon them, from the foremast extending a distance aft equal to three-fifths of the length of the ship; in such cases, the timber strakes need not be through bolted.*

SHIPS THE LENGTH OF WHICH EXCEEDS FIVE TIMES THEIR BREADTH.


All ships, the length of which (measured from the fore part of the stem to the after part of the stern-post on the range of upper deck), shall exceed five times their extreme breadth, shall have diagonal iron plates closely inserted either outside or inside the frame.* If placed outside, the said plates to extend from the upper side of upper tier of beams to the lower part of chocks at first futtock heads amidship, and to the same perpendicular height forward and aft, measured from the lower part of the keel; and if placed inside, the plates are to extend from the upper side of upper tier of beams to the lower part of chocks at *floor heads*. Whether placed outside or inside, the sizes of the plates not to be less than as follows, viz.:—

In ships of 100 tons and under 200 tons		...	3½ by $\frac{7}{16}$ in.
200	400	...	4 by $\frac{1}{2}$ "
400	700	...	4 by $\frac{5}{8}$ "
700	1000	...	4½ by $\frac{3}{4}$ "
1000	1500	...	5 by $\frac{3}{4}$ "
1500 and above	5½ by $\frac{7}{8}$ "

and to be fastened with bolts, one at each alternate timber if outside, and one at each timber if inside, not less in diameter than the sizes given for "through butt bolts" in Table D.


* Parties objecting to fit the iron plates on frames as prescribed above, are at liberty to submit, for the Committee's consideration and approval, such compensation as will, in their opinion, render the introduction of the iron plates unnecessary.

SKETCH SHOWING THE ARRANGEMENT OF THROUGH BOLTS IN THICK STRAKES OVER DOUBLE FLOORS. SECTION 59.

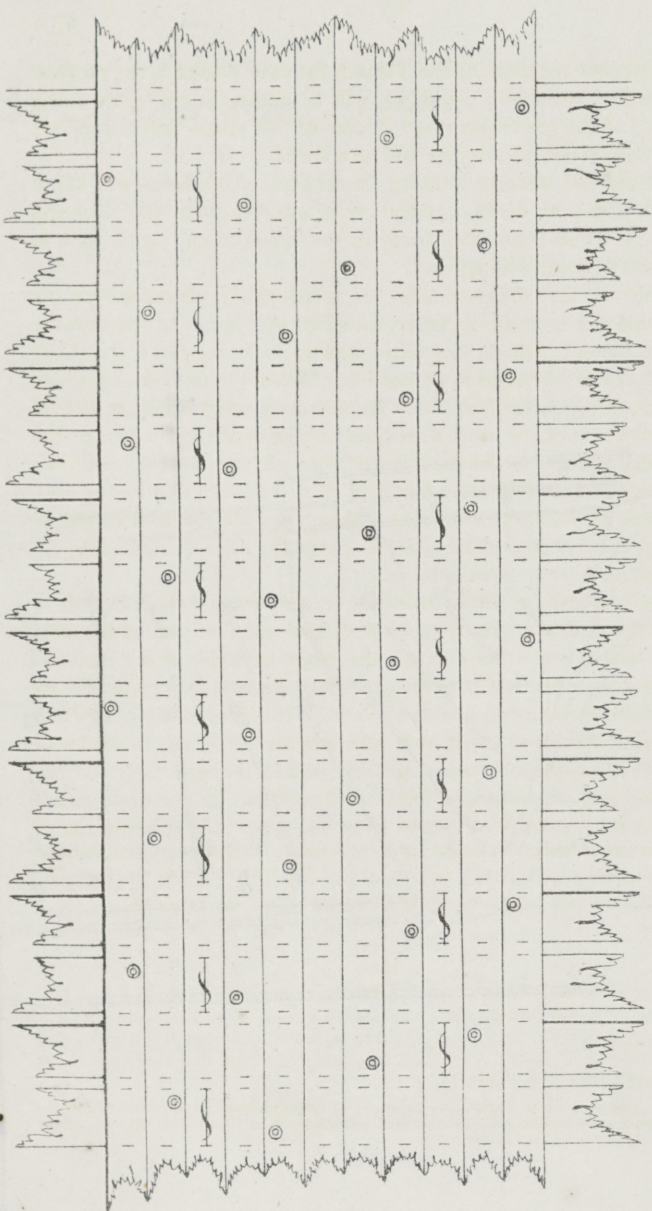



SHIPPING .

on Knees and Riders.

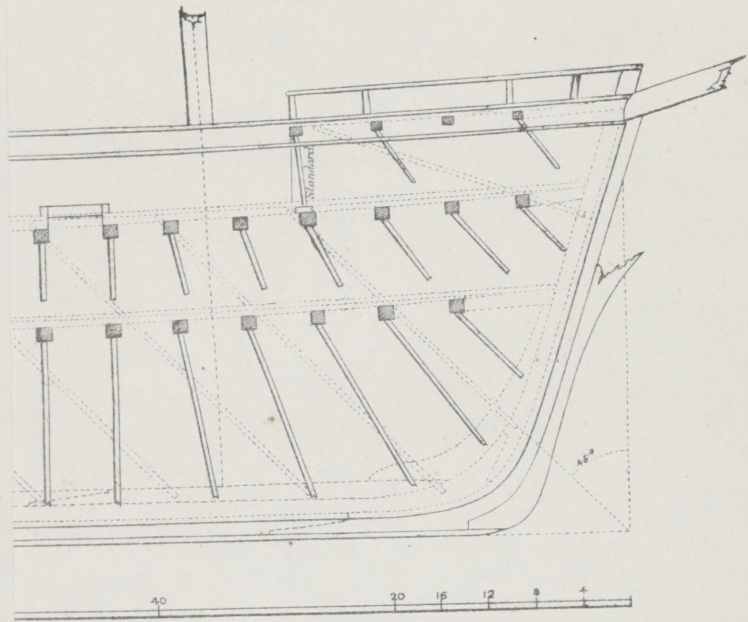

A plan shewing the direction of the Iron Plates on Frames, and Iron Knees and Riders, prescribed in the Rules, Sections 39 and 62.

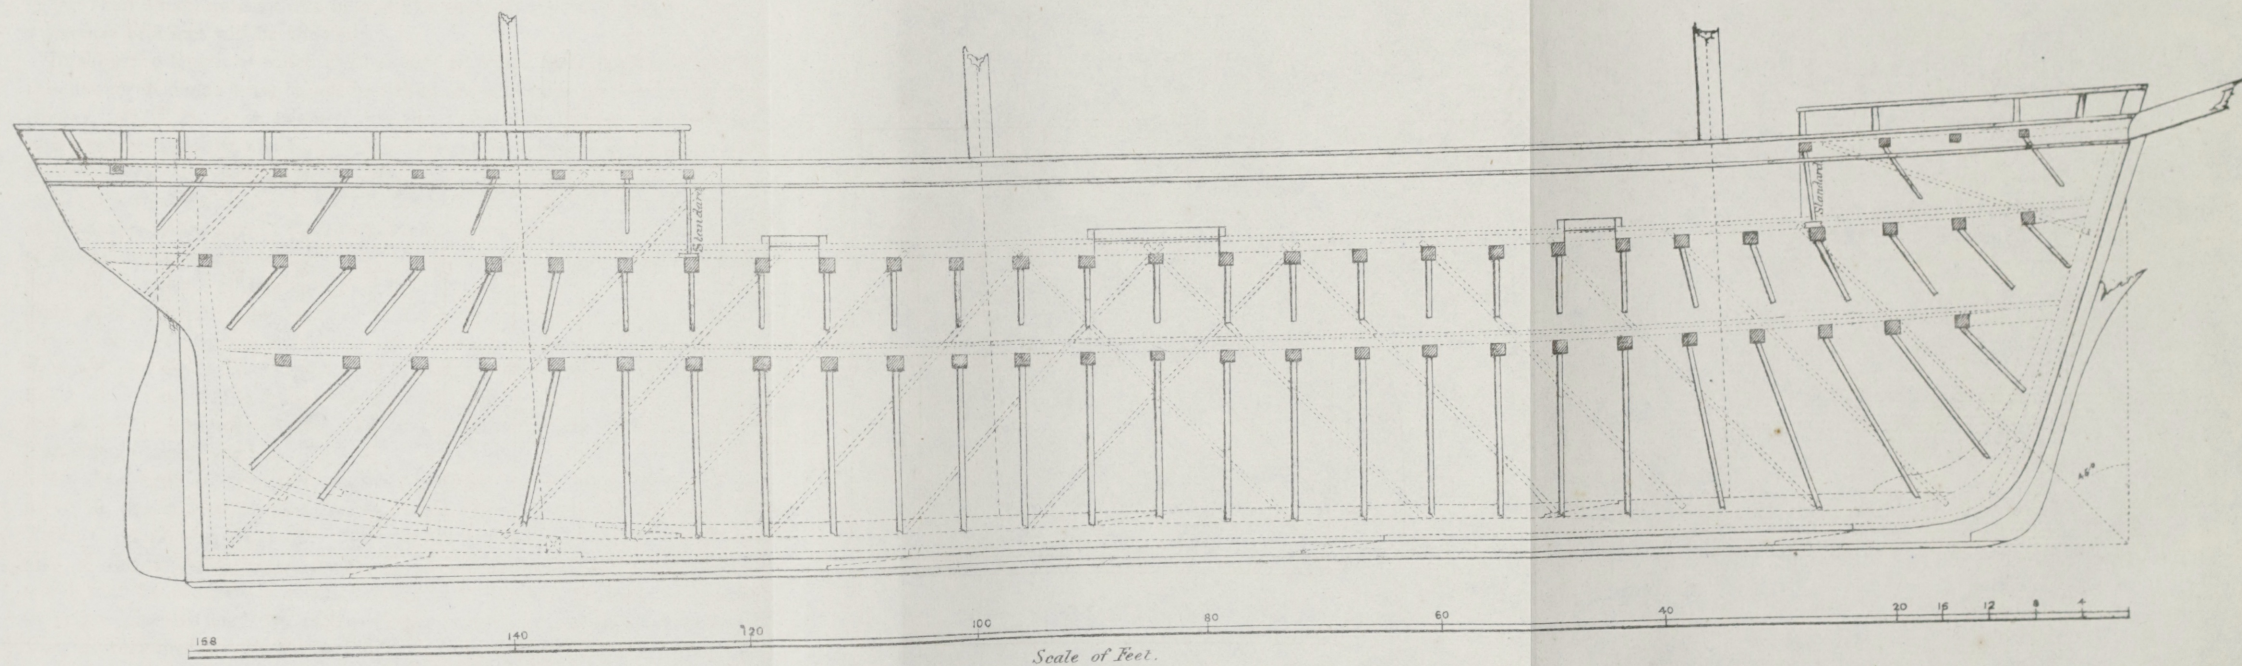

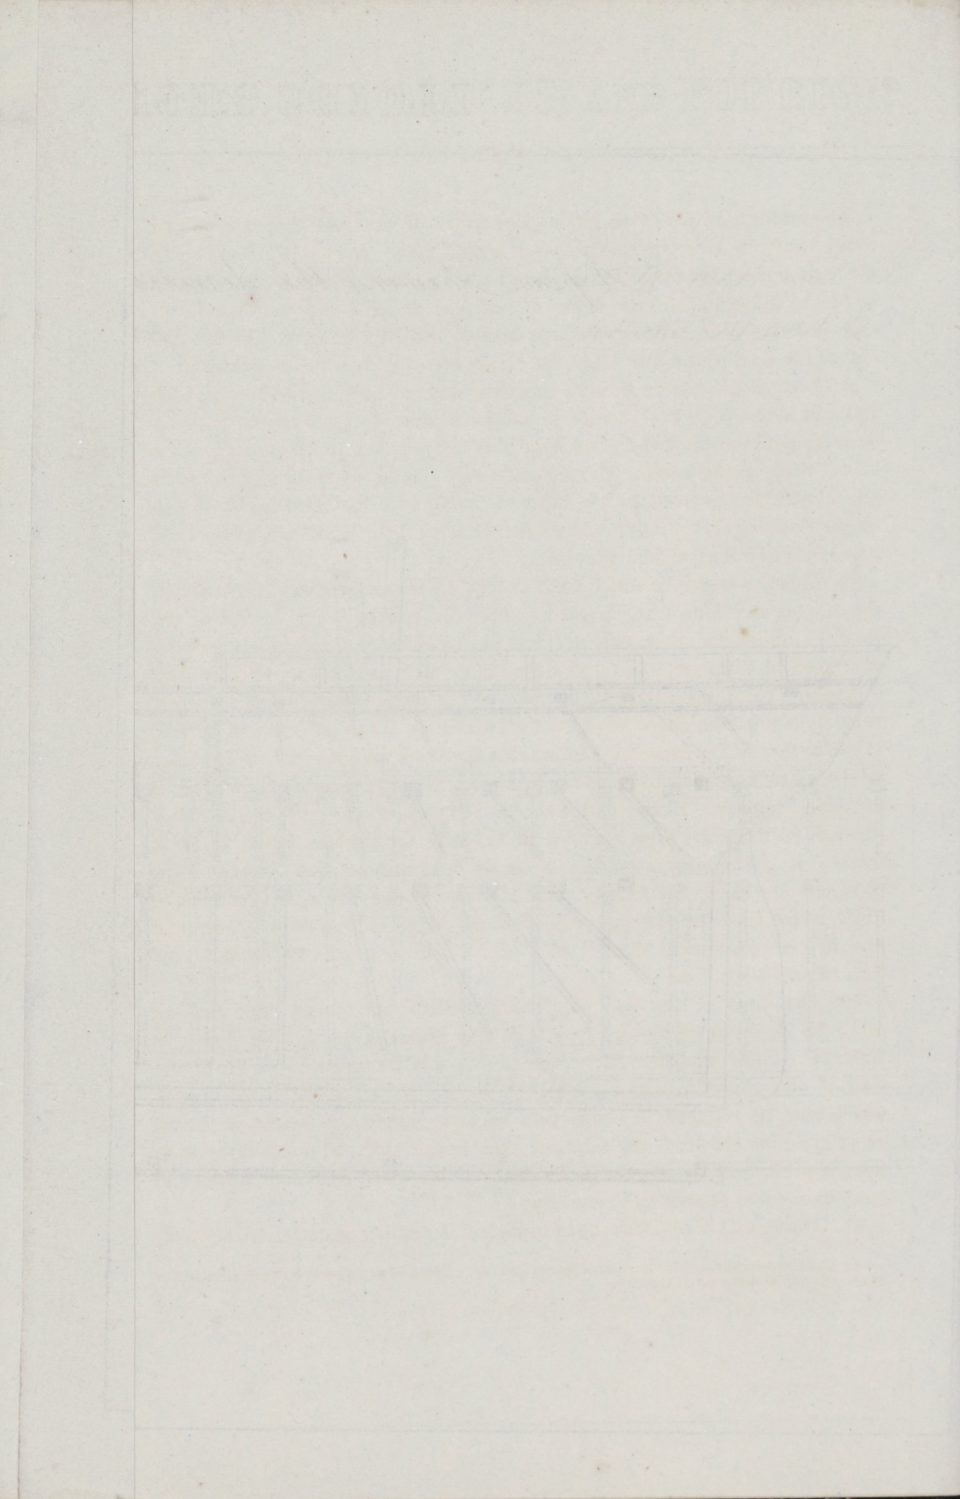

The number of plates to be in proportion of not less than one pair to every twelve feet of the ship's entire length taken as above, but not to be more than eight feet asunder measured on a square; the said plates are to be placed diagonally, at an angle of not less than 45 degrees, their lower ends pointing to the after end of the keel in the after body, and to the fore end of the keel in the fore body, four pairs crossing each other amidship.

All such ships to have shelves and waterways to each tier of beams, each equal in contents to the transverse sectional area of the beams of their respective decks at their ends; each of the said shelves and waterways to be bolted through the outside planking at every timber, with bolts of the sizes given in Table D; likewise the shifts of inside and outside planking not to be less than 6 feet, unless there be a strake wrought between them, and then a distance of 5 feet will be allowed.

In ships the length of which shall exceed *six* times their extreme breadth, the number of plates must be not less than one pair to every *ten* feet of the ship's entire length taken as above, but not to be more than six feet asunder measured on a square, and to be placed diagonally as above described. And in addition to the requirements for ships of five times their breadth in length, such ships must be fitted with a rider keelson or a pair of sister keelsons, at the option of the owner, the transverse sectional area of such rider keelson or sister keelsons each to be equal to two-thirds of that required in Table B for main keelsons. If a rider keelson be adopted, it is to be fastened with a through bolt (of the size required in Table D for keelson bolts), in every frame; or if the owner prefers it, every intermediate bolt may be short, passing only through the main and rider keelsons.* If sister keelsons be fitted, they must be fastened with through bolts, in number not less than one in every alternate timber, and of the size required in Table D for "scarphs of keels," &c.

40. The sizes of the deck and hold Beams have been regulated so as to be determined by the length of the beams *amidships*, as shewn in Table C., following page 32. The beams will be required to be of the size of the midship beam, except those at the *after end* of the ship, which may be reduced in proportion to their length. If beams of spruce or yellow pine are used, the siding of such beams shall be one-fourth larger than is prescribed by the above Table, or be increased each way, siding and moulding, equal in area to that amount.

41. The Beams of all Decks to be sufficient in number and size, and securely

* In all cases in which a rider keelson is fitted, it must be fastened as prescribed above, irrespective of the relative dimensions of the ship.


fastened to the sides either with lodging knees of iron or wood, or with a shelf piece and waterway,* or with a shelf-piece and knees, or with some other security equal thereto, so as sufficiently to connect the ends of the beams to the sides of the ship : and, in addition, all ships of 150 tons and above to have vertical knees to the DECK beams ; and those of 200 tons and above to have vertical knees to the HOLD beams, in number as shewn in Table E., following page 32. Vessels of 13 feet, and under 15 feet hold, the spacing of the hold beams not to exceed 8 feet apart, and the deck beams 4 feet :—Vessels of 15 feet and under 18 feet hold, the spacing not to exceed 8 feet and 4 feet apart alternately, or in that proportion ; the deck beams to be placed one over every hold beam, and one in all double spaces :—Vessels of 18 feet hold and above, the spacing of the beams not to exceed 4 feet 6 inches ; the deck beams to be one over every hold beam. The depth in all such cases to be determined by taking the measure from the top of the limber-strake (the thickness of which, for measurement to be taken as prescribed in Table B), to the top of the upper deck beams. Ships having a depth of hold, measured from the limber-strake to the under side of the lower deck beam, *above* 13 feet but not exceeding 15 feet, must be secured with iron riders of the sizes, and be fastened, ^{as} shewn in Table F., and in number not less than one on every fourth floor, on each side, from fore side of fore-mast to aft side of mizen-mast, to extend from the lower deck beams downwards so as to receive not less than two bolts in a substantial part of the floors ; *or by orlop beams, sufficient in number and properly secured.* All ships having two decks, (viz. upper and lower deck,) and exceeding 23 feet in depth from the top of the limber-strake to the top of the upper deck beams, or having three decks (viz. upper, middle, and lower deck) and exceeding 23 feet in depth from the under side of the MIDDLE DECK, to have orlop beams, the number to be in no case less than one half the number of lower deck beams in the space between the foremast and the mizen-mast. The application of this Rule to British North American built Ships and Fir Ships will not exempt them from the full operation of the Rule, Section 62. All dimensions, fastenings, and bolts of the middle deck in Vessels having three decks, (viz. upper, middle, and lower deck,) to be the same as those prescribed in the Tables for the upper deck of ships having only two decks ; *and a reduction of one-sixth from the dimensions, fastenings, and bolts, prescribed in the Tables, for the upper deck of vessels having only two (viz. upper and lower deck), will be*

* When the transverse sectional area of the shelf-pieces and waterways are each equal in contents to the transverse sectional area of the beams of their respective decks at their ends, as given in Table C, and the beams are either dowelled or dovetailed to their shelf-pieces and waterways, and the shelves and waterways are properly scarphed and through bolted, having also a hanging knee to the lower side of every beam end, then lodging-knees may be dispensed with, except in the mast-rooms. In Ships of 500 tons and under, where lodging knees properly bolted are applied, the ordinary plank clamps may be used, but the through bolting of them cannot be dispensed with.

THE NEW YORK AND ALBANY CANAL

1	1817	1818	1819	1820	1821	1822	1823	1824	1825	1826	1827	1828	1829	1830	1831	1832	1833	1834	1835	1836	1837	1838	1839	1840	1841	1842	1843	1844	1845	1846	1847	1848	1849	1850	1851	1852	1853	1854	1855	1856	1857	1858	1859	1860	1861	1862	1863	1864	1865	1866	1867	1868	1869	1870	1871	1872	1873	1874	1875	1876	1877	1878	1879	1880	1881	1882	1883	1884	1885	1886	1887	1888	1889	1890	1891	1892	1893	1894	1895	1896	1897	1898	1899	1900	1901	1902	1903	1904	1905	1906	1907	1908	1909	1910	1911	1912	1913	1914	1915	1916	1917	1918	1919	1920	1921	1922	1923	1924	1925	1926	1927	1928	1929	1930	1931	1932	1933	1934	1935	1936	1937	1938	1939	1940	1941	1942	1943	1944	1945	1946	1947	1948	1949	1950	1951	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2443	2444	2445	2446	2447	2448	2449	2450	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460	2461	2462	2463	2464	2465	2466	2467	2468	2469	2470	2471	2472	2473	2474	2475	2476	2477	2478	2479	2480	2481	2482	2483	2484	2485	2486	2487	2488	2489	2490	2491	2492	2493	2494	2495	2496	2497	2498	2499	2500	2501	2502	2503	2504	2505	2506	2507	2508	2509	2510	2511	2512	2513	2514	2515	2516	2517	2518	2519	2520	2521	2522	2523	2524	2525	2526	2527	2528	2529	2530	2531	2532	2533	2534	2535	2536	2537	2538	2539	2540	2541	2542	2543	2544	2545	2546	2547	2548	2549	2550	2551	2552	2553	2554	2555	2556	2557	2558	2559	2560	2561	2562	2563	2564	2565	2566	2567	2568	2569	2570	2571	2572	2573	2574	2575	2576	2577	2578	2579	2580	2581	2582	2583	2584	2585	2586	2587	2588	2589	2590	2591	2592	2593	2594	2595	2596	2597	2598	2599	2600	2601	2602	2603	2604	2605	2606	2607	2608	2609	2610	2611	2612	2613	2614	2615	2616	2617	2618	2619	2620	2621	2622	2623	2624	2625	2626	2627	2628	2629	2630	2631	2632	2633	2634	2635	2636	2637	2638	2639	2640	2641	2642	2643	2644	2645	2646	2647	2648	2649	2650	2651	2652	2653	2654	2655	2656	2657	2658	2659	2660	2661	2662	2663	2664	2665	2666	2667	2668	2669	2670	2671	2672	2673	2674	2675	2676	2677	2678	2679	2680	2681	2682	2683	2684	2685	2686	2687	2688	2689	2690	2691	2692	2693	2694	2695	2696	2697	2698	2699	2700	2701	2702	2703	2704	2705	2706	2707	2708	2709	2710	2711	2712	2713	2714	2715	2716	2717	2718	2719	2720	2721	2722	2723	2724	2725	2726	2727	2728	2729	2730	2731	2732	2733	2734	2735	2736	2737	2738	2739	2740	2741	2742	2743	2744	2745	2746	2747	2748	2749	2750	2751	2752	2753	2754	2755	2756	2757	2758	2759	2760	2761	2762	2763	2764	2765	2766	2767	2768	2769	2770	2771	2772	2773	2774	2775	2776	2777	2778	2779	2780	2781	2782	2783	2784	2785	2786	2787	2788	2789	2790	2791	2792	2793	2794	2795	2796	2797	2798	2799	2800	2801	2802	2803	2804	2805	2806	2807	2808	2809	2810	2811	2812	2813	2814	2815	2816	2817	2818	2819	2820	2821	2822	2823	2824	2825	2826	2827	2828	2829	2830	2831	2832	2833	2834	2835	2836	2837	2838	2839	2840	2841	2842	2843	2844	2845	2846	2847	2848	2849	2850	2851	2852	2853	2854	2855	2856	2857	2858	2859	2860	2861	2862	2863	2864	2865	2866	2867	2868	2869	2870	2871	2872	2873	2874	2875	2876	2877	2878	2879	2880	2881	2882	2883	2884	2885	2886	2887	2888	2889	2890	2891	2892	2893	2894	2895	2896	2897	2898	2899	2900	2901	2902	2903	2904	2905	2906	2907	2908	2909	2910	2911	2912	2913	2914	2915	2916	2917	2918	2919	2920	2921	2922	2923	2924	2925	2926	2927	2928	2929	2930	2931	2932	2933	2934	2935	2936	2937	2938	2939	2940	2941	2942	2943	2944	2945	2946	2947	2948	2949	2950	2951	2952	2953	2954	2955	2956	2957	2958	2959	2960	2961	2962	2963	2964	2965	2966	2967	2968	2969	2970	2971	2972	2973	2974	2975	2976	2977	2978	2979	2980	2981	2982	2983	2984	2985	2986	2987	2988	2989	2990	2991	2992	2993	2994	2995	2996	2997	2998	2999	3000	3001	3002	3003	3004	3005	3006	3007	3008	3009	3010	3011	3012	3013	3014	3015	3016	3017	3018	3019	3020	3021	3022	3023	3024	3025	3026	3027	3028	3029	3030	3031	3032	3033	3034	3035	3036	3037	3038	3039	3040	3041	3042	3043	3044	3045	3046	3047	3048	3049	3050	3051	3052	3053	3054	3055	3056	3057	3058	3059	3060	3061	3062	3063	3064	3065	3066	3067	3068	3069	3070	3071	3072	3073	3074	3075	3076	3077	3078	3079	3080	3081	3082	3083	3084	3085	3086	3087	3088	3089	3090	3091	3092	3093	3094	3095	3096	3097	3098	3099	3100	3101	3102	3103	3104	3105	3106	3107	3108	3109	3110	3111	3112	3113	3114	3115	3116	3117	3118	3119	3120	3121	3122	3123	3124	3125	3126	3127	3128	3129	3130	3131	3132	3133	3134	3135	3136	3137	3138	3139	3140	3141	3142	3143	3144	3145	3146	3147	3148	3149	3150	3151	3152	3153	3154	3155	3156	3157	3158	3159	3160	3161	3162	3163	3164	3165	3166	3167	3168	3169	3170	3171	3172	3173	3174	3175	3176	3177	3178	3179	3180	3181	3
---	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

SKETCH DESCRIPTIVE OF THE REQUIRED SHIFTING OF PLANK. Section 45.

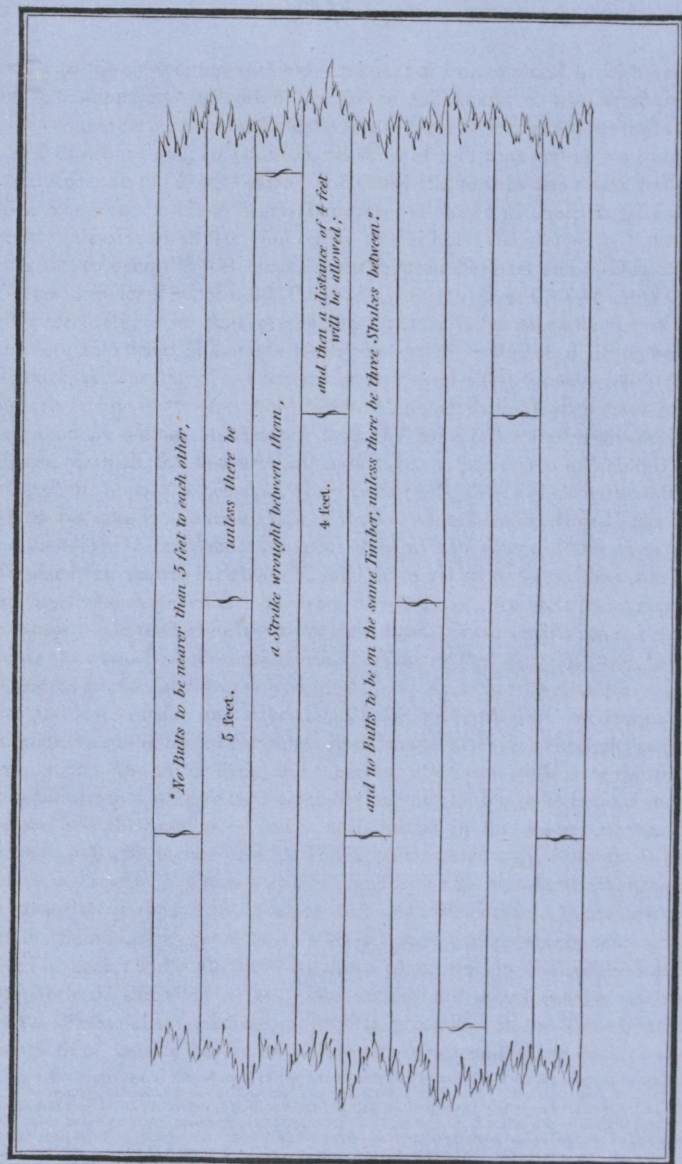

The Sketch shows the principle on which the Butts should be arranged, so as to avoid Stepping, which is deemed bad Workmanship.

allowed in the third or upper deck, by some called a spar deck. The middle deck to be a perfect deck laid and caulked. The united lengths of poop and forecastle not to exceed three-fifths of the entire length of the upper deck. All timbers of the frame including poop and forecastle to extend to the extreme height. Every ship exceeding 150 tons to have at least one crutch for the security of the heels of the after-timbers of the frame; one pair of pointers in addition to a knee at each end of the wing transom to connect the stern frame with the after-body of the ship; and a transom over the heels of the stern timbers properly kneed. The heels of the cant timbers forward and aft to be stepped into or on the deadwood, and bolted through.

42. Shifts of timber in ships of 200 tons and upwards, to be not less than one-seventh of the main breadth; and in ships under 200 tons, to be not less than one-sixth of the main breadth.

PLANK.

43. The outside planking to be of good quality, of the description prescribed in Table A, and to be clear of sap and free from all defects.

44. The inside planking to be of the description shown in Table A, and free from all foxy, druxy, or decayed planks. With regard to the ceiling plank, and the efficiency of its fastening, it will be required that the planking shall be properly shifted and fastened so that there shall be at least either treenails or through bolts, or short bolts, in each plank of the ceiling *in every timber*.

45. No butts to be nearer than five feet to each other (*see also Sec. 39*), unless there be a strake wrought between them, and then a distance of four feet will be allowed; and no butts to be on the same timber, unless there be three strakes between, as more particularly shown in the diagram annexed (*see Plate*), but vessels under 200 tons will be exempted from the full operation of this rule; and in ships of larger tonnage a literal compliance with it will be dispensed with in cases wherein it may be satisfactorily proved that the departure from the rule is only partial, being confined to the ends of the ship, or the planking of the topside, and does not injuriously affect the ship's general strength; but such relaxation will not be sanctioned unless an accurate description of the shifting of the plank be transmitted by the Surveyors, to enable the Committee to form a proper judgment on the case.

The thickness of the plank, according to the tonnage of the ship, is not in any instance to be less than is prescribed in Table B, following page 32.

The breadth of the wales in every case is to be regulated as under, viz. :—

When the extreme length of the ship, measured from the fore part of the

stem to the after part of the stern post, on the range of upper deck, is six times her depth of hold (and under), the wales are to be in breadth 3 in. to every foot of the depth of hold.

When the extreme length of the ship is eight times her depth of hold, the wales are to be in breadth $3\frac{1}{2}$ in. to every foot of the depth of hold.

When the extreme length of the ship is ten times her depth of hold (and above), the wales are to be in breadth 4 in. to every foot of the depth of hold.

And other intermediate dimensions in these proportions.

FASTENINGS.

46. The Treenails to be of good quality, and of a description of wood EQUAL TO THE BEST MATERIAL through which they are to pass. They are to be circular, being either engine-turned, compressed, or planed. In all cases in which planks above eleven inches in width shall be used, they must be double fastened; and those above eight inches in width must be treenailed double and single, except bolts intervene; and if less than that width, then to be treenailed single; in each case at least one-half of the treenails must go through the ceiling. Every butt in each outside plank to be fastened with *two* bolts, one of which may be in the adjoining timber, and one to be through and clenched.* The bilges to be secured with bolts so placed that from the foremast, extending a distance aft equal to three-fifths of the length of the keel, there shall, in ships under 300 tons, be at least one bolt through and clenched in each first foothook; and that in ships of 300 tons and upwards there shall be at least two bolts through and clenched for each set of timbers in one or other of the thick bilge strakes. All the bolts of the knees, breasthooks, crutches, riders, transoms, pointers, keelsons, shelf pieces, *waterways, heels of timbers against fore and after deadwood*, and of all other material fastenings, are to be driven through and clenched on rings of the same metal as the bolts. The up and down bolts in the knees to beams are not required to be through the deck, but whether clenched upon the beams, or upon the deck, they must be clenched on rings of the same metal as the bolts. The two bolts, the nearest to the crowns of the pintles and braces of the rudder are also to be through and clenched, those through the braces to be in the main piece of stern post. The limber strakes to be bolted down to the floors, and one bolt in every floor, on each side, to be through and clenched. When the heels of the first futtocks meet at the middle line on the keel under the keelson (either with full moulding or with *butted chocks*) the through bolting


* Where thick garboard strakes are used, they must be bolted horizontally through the keel and each other.

SKETCH SHOWING THE PROPER ARRANGEMENT OF TREENAILS OR BOLTS SECTION 46.

*Single Fastening
in planks 8 inches
wide & under.*

*Double & Single
Fastening in planks
above 8 inches & not
above 11 inches.*

*Double Fastening
in planks above 11 inches.*

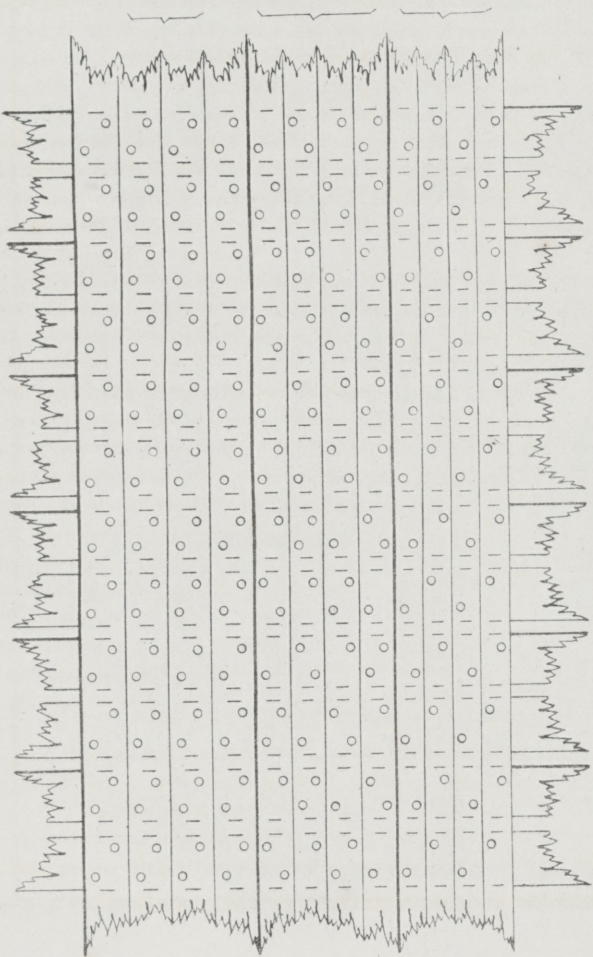

E

of the limber strakes may be dispensed with. Ships in which the flat of upper deck, poop, and forecastle, are fastened with nails or bolts of Copper, Yellow Metal, or Galvanized Iron, and the whole outside planking of which is fastened with treenails and Copper or Yellow Metal Bolts, to the entire exclusion of Iron Bolts and Iron Nails, and in which no Iron Bolts are used in any part of the Vessel, except—the *frame Bolts, the short Bolts of inside planking, and short bolts in iron plates on frames, also short intermediate bolts in rider keelsons; up and down Bolts of knees which clinch upon the beams of the upper deck, poop, or forecastle, when the flat of deck is laid over them; up and down Bolts of hold or lower deck beams; fore and aft Bolts in arms of knees to beams; Bolts of the comings, windlass or bowsprit bits; deck fixtures; the upper bolt in knee of head, and athwartship Bolts in knee of head afore the stem; Bolts or fastenings incidental to the rigging; or any fastenings above the respective planksheers of poop, waist, and forecastle*—will be allowed an additional period of one Year.

And, in addition thereto, a further period of one Year will be allowed to Ships so fastened, in which the outside planking above the floor heads is also fastened entirely with Bolts of Copper or Yellow Metal in lieu of Treenails.

In all such cases of substitution, the number of bolts must be the same as is already prescribed as above for treenails; the proportion of through bolts must be at least *one-half*; * and all the through bolts must be of malleable metal, and clenched on rings (of the same metal) inside. The sizes of the copper or mixed metal bolts must be as under, *viz.* :—

In ships of 150 tons and under 200 tons	$\frac{5}{8}$ in.
200 ditto 350	$\frac{3}{4}$ in.
350 ditto 500	$1\frac{1}{8}$ in.
500 ditto 700	$\frac{7}{8}$ in.
700 ditto 900	$1\frac{1}{4}$ in.
900 and above	1 in.

Smaller sizes must not be used.

and the lengths of the short bolts not less than as follows, *viz.*—

When used in plank of $2\frac{1}{2}$ inches, to be 7 inches long

—	3	”	8	”
—	4	”	10	”
—	5	”	12	”

and so on in proportion for plank of other thicknesses. The sizes of the

* Whenever *metal fastenings* are used in lieu of Treenails, this proportion must be observed.

bolts required in the several parts must not be less than is shown in Table D, following page 32.

47. In every case where the butt and bilge Bolts are not through and clenched, One Year will be deducted from the period which would otherwise be assigned in the classification of the vessel.

48. The Scantlings and dimensions for all sized vessels to be proportionately regulated, agreeably to Table B, following page 32.

49. Ships surveyed while building, in which *all the materials required for a Twelve Years' Ship shall have been used*, and most of the other requisites for that grade fulfilled, but which, from partial deficiencies, may not appear to be in all respects entitled to the full period, although superior to the description of a Ten Years' ship, may be marked in the Book thus, 11 A; thereby denoting that they are to remain on that grade *Eleven Years*, provided they be kept in a state of efficient repair.

50. Ships surveyed while building, in which every *alternate* set of timbers are frame-bolted together throughout their entire lengths, and the scantling and shifts of the timbers, the thickness and shifts of the planks, and size of fastenings may be the same as are required by the rules, and in which the chocks are wrought with a butt at each end, and the description of materials prescribed in the annexed Table A shall also have been used, but in which the frame is not so well squared as is required for Twelve Years' ships, but which shall be *in other respects* equal thereto, shall be marked "10 A;" thereby denoting that they are to remain on that grade for *Ten Years*, provided they be kept in a state of efficient repair.

51. In all other cases, ships surveyed while building, and constructed of the materials of good quality, hereinafter shown in Table A, will be allowed the several terms of years respectively appointed, provided they be kept in a state of efficient repair. All ships, *not built under Survey*, whether in the United Kingdom or abroad, for which a character may be claimed, must be placed in dry dock or laid on blocks in order that their bottoms may be seen and properly examined; they will also be required to have *their timbers completely exposed for examination, by a plank or listing* AS THE SURVEYOR, (who must be an exclusive officer of the Society), *MAY DIRECT, being taken out, either inside or outside, all fore and aft, on both sides, equal to one entire strake, at the first foothook heads, and another between decks; and a few treenails must likewise be driven out, so that the Surveyors, from actual inspection, may be satisfied whether or not they are of the quality and make prescribed by the Rules; and the same being thus ascertained, shall be reported to the Committee, and a character assigned.* If the ship

be 400 tons and upwards, the Survey must be made by two Surveyors, and their report signed accordingly.

52. Ships built under a substantial and efficient Roof, kept in good repair, *which shall project at each end beyond the length, and on each side beyond the breadth, a quantity equal to half the breadth of the vessel*, shall have one year added to the period prescribed, provided they shall have been surveyed whilst building, and shall have occupied a period of not less than twelve months in their construction, *and not less than nine months (as part thereof) after the Frames shall have been completed.*

53. Ships built in the United Kingdom;—or in Quebec after 1851;—or St. John, New Brunswick after 1853;—or Miramichi, and Northern Ports of New Brunswick, or in Prince Edward Island after 1855;—and *not surveyed while building* by the Surveyors to this Society, and all ships, the owners or builders of which may have refused or declined to permit them to be surveyed at the several periods prescribed by the Rules, will have One Year deducted from the period which would otherwise have been assigned, in consequence of their not having been submitted to survey during their construction. In no case, however, will a higher grade than 10 A be assigned to ships built in the United Kingdom, which shall not have been surveyed while building.

CONTINUATION OF SHIPS A.

54. If, on the termination of the period of original designation, or if at any subsequent period not exceeding one-third of the number of Years assigned originally, or on Restoration, an Owner should wish to have his ship remain, or be replaced on the letter A (*vide section 59*), he is to send a written notice thereof to the Secretary, and the Committee shall then direct a Special Survey as follows to be held by not less than *two* competent persons to be appointed by the Committee, one of them to be a Surveyor the exclusive servant of the Society :—

SURVEY.

For the purpose of facilitating such survey, the ship shall be either placed in dry dock or laid on blocks, so that the keel may be examined, and be scraped from the light water-mark upwards, including the plank-sheer and waterways, so as to expose the surface of the plank to view.* The windlass to be unhung, and wood linings stripped. The hold to

* If the Ship has been sheathed with wood over felt, fastened with copper or mixed metal nails, within a period of five years, and the plank from the light water-mark upwards shall, when so sheathed, have been brightened, and the condition of the bolts, planking, trenails, and caulking ascertained, and favourably reported upon by the surveyors; and provided that the sheathing which covers the binding bolts and raft ports, and a strake of sheathing all fore and aft on each side under the wales be removed, and listings of sheathing cut out at hood ends; and the planking, fastenings,

be cleared and proper stages made. The attention of the Surveyors shall then be particularly directed to the state of the upper or main deck and comings, the upper and lower deck bolts, and the outside planks through which they pass, the planksheers, waterways, and beams, so far as they can be examined; the hawse timbers, knight-heads, breasthooks, and transoms; the floors and keelsons; the keel and rudder; the planking outside, and the treenails passing through from the light water-mark upwards; the ceiling inside, and the frame and inner surface of the outside planking where it may be seen; and the sheer and general form of the ship; *and should any suspicious treenails or bolts appear, the same are to be driven out for inspection.* The Surveyors on these points shall transmit to the Committee a detailed report, accompanied by such observations as may occur to them, from inspection of the ship, or from information of the repairs she may have received. If from the report of such special survey the ship shall appear to be in a sound and efficient state, and to have preserved her original form unaltered, the Committee shall continue such ship on the letter A for such further period as they may think fit, not exceeding, however, one-third of the number of years which had been originally assigned. Ships classed A for four years, will be allowed a Continuation for *Two Years*, provided that, in addition to the above requisitions, the Owners shall agree to a *strake in the Topsides, fore and aft*, on both sides, being also removed; this, however, will not exempt ships built in the British North American Colonies from the operation of the Rule, Section 63. Ships so Continued shall be distinguished in the Register Book by the number of years for which the character is extended, being inserted separately under the number assigned on the original character, thereby denoting that the ship has been found on survey in such good and efficient order as to entitle her to be Continued for years. The period assigned for Continuation will, upon all occasions, commence from the time the ship may have gone off the letter A, without regard to the date when the survey for this purpose may have been held.

In cases of the repair of ships for Continuation of character under the Rules, section 54, materials of an inferior description (but not below those prescribed for the six years' grade) may be permitted to be used in

and caulking so exposed, shall prove to be in good condition, then, on application to the Committee, the stripping from the light water-mark upwards may be dispensed with; but whenever the sheathing is removed, the outside planking is to be scraped or dubbed bright, and examined as prescribed by the above rule.

If the ship has been sheathed with metal within a period of two years, and it shall appear to the surveyors that stripping from the light water-mark upwards may be dispensed with, the case will receive due consideration on application to the Committee.

those parts which must of necessity, under the operation of the Rules, section 56, be *entirely removed* on a repair for Restoration; subject, however, to the ship-owner, in every instance, making a special application to the Committee for their previous sanction.

RESTORATION OF SHIPS TO THE CHARACTER A.

FIRST RULE.

55. If, at any time before the expiration of two-thirds of the number of years *beyond* the period originally assigned, an owner be desirous to have his ship Restored to the A character, such Restoration (on his consenting to the special survey hereinafter described, to be held by two Surveyors, and performing the repairs found requisite) will be granted for a period not exceeding two-thirds of the time originally assigned, the same to be calculated from the date of such repairs.

Requisites for Restoration.

56. All the bolts in the range of each deck to be driven out, and the planks taken out; the upper deck waterways, and planksheers and spirketting, and the strake next the waterways on the lower deck in the midships, to be taken out;* the sheathing to be entirely stripped off the bottom; *all the outside planking from the light water-mark upwards, to be scraped bright*; a strake in the upper course of the bottom, between the wales and the light water-mark fore and aft, and a plank in the ceiling at the floor heads on each side, to be taken out, the limbers to be clear, and the hooks forward to be exposed; the windlass to be unhung, and the wood linings stripped; and in that state the ship to be submitted to a special survey and examination, at which the attention of the Surveyors appointed by this Society is to be particularly directed to the state of the decks, the remaining plank of the topsides, the wales, upper courses, and treenails, and other fastenings; also to the state of the frame, hawse timbers, and knightheads, keelson, floors, foothooks, ceiling, and breasthooks, the rudder in all its parts and hangings; and if, after such examination, the

* In the cases of ships fastened with copper or yellow metal, to the exclusion of iron (in conformity with the Rule, Section 46), where there is no poop or forecastle, if the whole of the plank-sheer and spirketting of upper deck and outside planking equal to one strake all fore and aft be removed in way of fastening bolts to each tier of beams, below the upper deck beams; and where there is a poop and forecastle, then if the whole of the plank-sheer and spirketting of poop, fore-castle, and waist, and a strake of outside planking (in way of fastening bolts to upper deck beams), the entire lengths of the poop and fore-castle, and outside planking equal to one strake all fore and aft be removed in way of fastening bolts to each tier of beams below the upper deck beams; and in all cases a strake of deck next the waterway of each deck, on both sides, be removed, also the throat bolts of all knees, together with the other requisitions relating to the bottom, ceiling, &c., the further removal of fastenings, bolts, and planks, may, under the sanction of the Committee, be dispensed with, provided their condition be carefully ascertained and favourably reported upon by the Surveyors.

The above relaxations, so far as they relate to the removal of plank and fastenings in the range of the lower deck, will be extended to all ships in which all the lower deck fastenings are of copper or yellow metal.

Owner should consent to take out all planks, timbers, beams, knees, waterways, fastenings, and other parts that may be found defective, or objected to, and replace them with materials of the same species, or of equal quality with those of which the ship was originally constructed, such ships to be entitled to Restoration for a period proportionate to their real condition and the extent of the repairs performed; or if timber of an inferior description, or second-hand English or African Oak or Teak be used, then for a period not exceeding that for which such materials would have entitled a new ship to stand A according to the tables, subject in either case to the ship being at all times thereafter kept in a state of efficient repair.

SECOND RULE.

57. If, *at any age* of a vessel, an Owner be desirous to have his ship Restored, such Restoration (on his consenting to the special survey herein-after described, to be held by two Surveyors, and performing the repairs thereby found requisite) will be granted for so long a period as may be deemed expedient by the Committee, not exceeding, in any case, the term of eight years.

Requisites for Restoration.

58. The whole of the outside plank of the vessel to be taken off as low as the second foothook heads, and the remainder of the planking, either outside or inside, together with all the decks, to be removed, *so as to expose the timbers of the frame entirely to view*, the windlass to be unhung, and the wood linings stripped, and in that state the ship to be submitted to a special survey and examination, by the Surveyors appointed by this Society; and if, after such examination all timbers, beams, knees, keelsons, transoms, breasthooks, remaining plank, inside or outside, or other parts found to be defective, be replaced with materials of the same species, or of equal quality with those of which the ship was originally constructed, and all the treenails driven out and renewed, such ship may be Restored. But if timber of an inferior description, or second-hand English or African Oak or Teak be used, then for a period not exceeding that for which such materials would have entitled a new ship to stand A according to the tables, subject, in either case, to the ship being at all times thereafter kept in a state of efficient repair.

59. Ships which have been *Restored* shall be entitled to Continuation, subject to the same conditions of survey and examination as are prescribed for ships proposed to be Continued at the expiration of the period first assigned to them (Sec. 54); but in like manner, the term of such extended Continuance shall be limited to a period not exceeding one-third of the

number of years for which the ships may respectively have been *Restored*, without any reference whatever to the period originally assigned to them.

At the termination of the several periods assigned to ships for remaining on the character A, they will have the character A struck through, and the word '*lapsed*' inserted against them; and if not surveyed prior to the re-printing of the Register Book, they will appear without any character.* But if during the *last year* of the period assigned to them, the Owners of a ship shall, in consequence of her being about to proceed on a distant foreign voyage, apply to have her surveyed for continuation on the letter A, or for the character A in red, a special survey shall be held conformably to the Rules, sections 54 or 60, as the case may be: and if from the report of such special survey, the ship shall appear to be in all respects in a sound and efficient state, such as is required by those Rules, the Committee shall, from the period at which the ship's character would terminate, continue her on the letter A, or assign to her the character A 1 in red in accordance with the Rules referred to.

SHIPS A, IN RED.

60. Ships that have passed the periods which have or might have been assigned to them for the character A originally, or on Continuation, or for Restoration, and shall be found on survey to be of a superior description, being fit for the safe conveyance of dry and perishable goods to and from all parts of the world, shall be classed A in Red, as the Second description of the First class. Those ships, however, the original construction of which, by their timber materials, may not have entitled them to the A character for a longer period than Five Years, will not be eligible for this character.

In all cases in which the owner may claim this character, the ship must undergo a special survey by two surveyors, (to be appointed in every instance by the Committee), one of whom shall be an exclusive officer of the Society, and be subject in other respects to a compliance with the undermentioned requisitions of Survey, viz.:—

FIRST SURVEY FOR A, IN RED.

The ship to be either placed in dry dock or laid on blocks, so that the keel may be examined, and be scraped or dubbed bright from the light water-mark upwards, including the planksheers and water-

* Ships launched on and after the 1st July, 1859, will retain the characters respectively assigned to them until the issuing of the Register Book for the year commencing on the 1st July next ensuing after the periods for which they have been classed shall have expired, provided they undergo the Surveys required by the Rules, and are kept in an efficient state of repair. Thus, ships launched on the 1st July, 1859, or any other day between that date and the 1st July, 1860, and classed A 1 for 10 years, will lapse on the 30th June, 1870. The existing tonnage, and all ships launched previously to the 1st July, 1859, will remain under the Rules in force when they were built.

ways, so as to expose the surface of the plank to view.* Iron bolts in number not less in any case than six on each side, in each range of the deck fastenings to be driven out in ships of 500 tons and under, and increased in number in proportion to the size of the ship, and one treenail to be driven out in every alternate frame or fourth timber between the upper edge of the wales and planksheers, and one in every alternate frame or fourth timber between the upper edge of the wales and the light water-mark, and such other parts of the bottom as the surveyors may direct, so as to enable a judgment to be formed as to the general state of the frame, treenails, and inside of the planking. The hold to be cleared, and proper stages made both inside and outside. The windlass to be unhung, and the wood linings stripped. The attention of the surveyors shall then be particularly directed to the state of the upper or main deck and comings, the upper and lower deck bolts, and the outside planks through which they pass, the planksheers, waterways, and beams, so far as they can be examined; the hawse timbers, knightheads, breasthooks, and transoms; the floors and keelsons; the keel, rudder, and windlass; the planking outside and inside, and the treenails; and the frame and inner surface of the outside planking, where they can be seen; and the sheer and general form of the ship; the condition of the oakum and caulking also to be ascertained, and the ship to be efficiently repaired with suitable materials as hereinafter stated.

SECOND SURVEY FOR A, IN RED.

(After two-thirds the number of years beyond that assigned originally, or on Restoration, have expired.)

But when a period of two-thirds of the number of years beyond that originally assigned for a vessel's retaining the A character, or if a period of two-thirds the number of years beyond that assigned on Restoration has elapsed, an owner be desirous to have his ship *retain*, or be placed upon, this character, application must be made to the Committee in writing, who will direct the survey to be made by two surveyors, one of whom shall be an exclusive officer of the Society; and for the purpose of holding such

* If the ship has been sheathed with wood over felt, fastened with copper or mixed metal nails, within a period of five years, and the plank from the light water-mark upwards shall, when so sheathed, have been brightened, and the condition of the bolts, planking, treenails, and caulking ascertained, and favourably reported upon by the surveyors; and provided that the sheathing which covers the binding bolts and raft ports, and a strake of sheathing all fore and aft on each side under the wales be removed, and listings of sheathing cut out at hood ends; and the planking, fastenings, and caulking so exposed shall prove to be in good condition, then, on application to the Committee, the stripping from the light water-mark upwards may be dispensed with; but whenever the sheathing is removed, the outside planking is to be scraped or dubbed bright, and examined as prescribed by the above rule.

If the ship has been sheathed with metal within a period of two years, and it shall appear to the surveyors that stripping from the light water-mark upwards may be dispensed with, the case will receive due consideration on application to the Committee.

survey, the ship must be placed in dry dock, or laid on blocks upon ways, so that the keel may be examined; all sheathing to be entirely stripped off the bottom and elsewhere; all the outside planking from light water-mark upwards, including the planksheers and waterways, to be scraped or dubbed bright; the timbers of the frame to be exposed to view by the removal of planking equal to one strake fore and aft, on each side, above the wales, either inside or outside at the discretion of the surveyor; a short plank in each buttock; a plank or listing of sufficient breadth, on each side, at the discretion of the surveyor, in the ceiling above the floor heads in midships (or, if the ship-owner should prefer it, a plank outside at the same height), and a reasonable number of treenails before and abaft the same, so as to ascertain the state of the lower timbers of the frame; and in order to ascertain the condition of the beam ends, either a strake of deck next the waterways on each side to be taken out, or an examination be made by boring, at the option of the ship-owner; iron bolts and treenails to be driven out at the various parts as prescribed above;* proper stages to be made both inside and outside; the windlass to be unhung, and the wood linings stripped; and when in the state above described, the special survey to be held as above directed upon all the parts exposed to view; the condition of the oakum and caulking to be ascertained; the ship to be efficiently repaired with suitable materials, as hereinafter stated. And to entitle them to continue this character, such vessels will be required, in addition to the usual annual survey, to undergo a special re-survey, as prescribed above, within a period (from the date of the last special re-survey) not exceeding *two-thirds* of the several terms of years originally assigned to them, or earlier, if, in the judgment of the Surveyors, upon a careful examination of the ship, the same shall appear to them to be necessary.

In the repair of vessels for the above character, no materials may be used of a description inferior to those allowed in new Ships for the Six Years' grade.

Whenever it shall appear to the Surveyors that a vessel classed A, in Red, shall no longer be in a condition to deserve that character, notice of the proposal to reduce her shall be given in writing to the Owner, Master, or Agent, in the same manner as is prescribed by the rules, section 21, page 7.

N.B. Ships at present classed with the \mathcal{A} asterisk character will be allowed to retain the same, subject to annual Survey, until the expiration of the period for which they have already been specially surveyed.

* In the case of doubled ships, or ships of peculiar construction, special application may be made to the Committee.

SHIPS Æ.

61. Ships that have passed the prescribed age for the A Character, but have not undergone the repairs which would have entitled them to be Continued or Restored; or having been Continued or Restored, and the additional period thus assigned expired, and also such ships as have never had an original character, which shall be found on survey fit for the conveyance of dry and perishable goods on *shorter voyages*, shall be distinguished by the diphthong Æ; and a careful survey will be required to be made *annually*, or on the return of the ship from every foreign voyage, by one of the Surveyors to this Society, who is to state distinctly and separately the actual condition of the *upper deck fastenings, waterways, spirketting, planksheers, topsides, upper deck with its appendages, lower deck fastenings, wales, counter, plank, and treenails outside to the water's edge, rudder, windlass and capstan, beams, breasthooks, transoms, and timbers*; but if not surveyed within twelve months, such ship having been during that time in some port in the United Kingdom, the character will be omitted until such survey be held; or, as the case may be, she will be allowed to pass into the class E.

62. Ships built in the British North-American Colonies, and all ships wherever built, the frames of which are composed of *Fir*, of 400 tons and above, shall, in order to entitle them to be classed in the Register Book of the Society, be secured in their bilges by the application of iron knee riders, or hanging knees and riders to cover the joints of the floor and foothook heads, to extend from the height of the hold beams to the floors so as to receive not less than two bolts in a substantial part of the floors; the number of iron knees and riders to be not less than one of each to every hold or lower deck beam on each side. The knees to be connected with the riders or not, at the option or convenience of the owners; but if not so connected, the side arms of the knees are to be of the length and to be fastened as prescribed in Table F. The number of knees to each deck, and of riders, also their dimensions, and number of bolts, are fully explained in Table F. All ships built in the Colonies will be considered as "iron fastened" in their centre lines, unless it shall be satisfactorily shown to the contrary, either by the exposure of some of the bolts, or by a certificate to be produced from the builders.

On and after the 1st January, 1858, ships which proceed to sea *without being fastened with the iron knees and riders prescribed by the rules*, will have one year deducted from the period to which they would otherwise be entitled to be classed in the Register Book.

Ships built in the British North American Colonies, and all ships the frames of which are composed of Fir, of 600 tons and upwards, and all ships (wherever built) the length of which (measured from the fore part of the stem to the after part of the stern-post on the range of upper deck), shall exceed five times their extreme breadth, shall have diagonal iron plates closely inserted either outside or inside the frame. If placed outside, the said plates to extend from the upper side of upper tier of beams to the lower part of chocks at first foothook heads amidship, and to the same perpendicular height forward and aft, measured from the lower part of the keel; and if placed inside, the plates are to extend from the upper side of upper tier of beams to the lower part of chocks at floor heads. Whether placed outside or inside, the sizes of the plates not to be less than as follows, viz. :—

In ships of 100 tons and under 200 tons	...	$3\frac{1}{2}$	by	$\frac{7}{16}$	inch.
" 200 " 400 "	...	4	by	$\frac{1}{2}$	"
" 400 " 700 "	...	4	by	$\frac{5}{8}$	"
" 700 " 1,000 "	...	$4\frac{1}{2}$	by	$\frac{3}{4}$	"
" 1,000 " 1,500 "	...	5	by	$\frac{3}{4}$	"
" 1,500 and above.....	...	$5\frac{1}{2}$	by	$\frac{7}{8}$	"

and to be fastened with bolts, one at each alternate timber if outside, and one at each timber if inside, not less in diameter than the sizes given for "through butt bolts" in Table D.

The number of plates to be in proportion of not less than one pair to every 12 feet of the ship's entire length taken as above, but not to be more than eight feet asunder measured on a square; the said plates are to be placed diagonally, at an angle of not less than 45 degrees, their lower ends pointing to the after end of the keel in the after body, and to the fore end of the keel in the forebody, four pairs crossing each other amidship.

All such ships to have shelves and waterways to each tier of beams, each equal in contents to the transverse sectional area of the beams of their respective decks at their ends; each of the said shelves and waterways to be bolted through the outside planking at every timber, with bolts of the sizes given in Table D; likewise the shifts of inside and outside planking not to be less than 6 feet, unless there be a strake wrought between them, and then a distance of 5 feet will be allowed.

In ships the length of which shall exceed *six* times their extreme breadth, the number of plates must be not less than one pair to every *ten* feet of the ship's entire length taken as above, but not to be more than six feet asunder measured on a square, and to be placed diagonally as above described. And in addition to the requirements for ships of five times their breadth in

length, such ships must be fitted with a rider keelson, or a pair of sister keelsons, at the option of the owner,—the transverse sectional area of such rider keelson or sister keelsons each to be equal to two-thirds of that required in Table B for main keelsons.—If a rider keelson be adopted, it is to be fastened with a through bolt (of the size required in Table D for keelson bolts) in every frame; or if the owner prefers it, every intermediate bolt may be short, passing through the main and rider keelsons.* If sister keelsons be fitted, they must be fastened with through bolts, in number not less than one in every alternate timber, and of the size required in Table D for “scarphs of keels,” &c.

63. All British North-American built ships, which have gone, or may go off the List of Ships of the A character, or which may be of an age exceeding the period for which they might have had claims to be put upon that grade (whether classed or not), shall, as from time to time they come under examination, be subjected to a careful survey, to be made by one of the Surveyors to this Society;—and no further character shall be assigned them unless a survey shall be held as follows; and planking, either inside or outside, at the discretion of the Surveyors, in quantity equal to *one entire strake* fore and aft on both sides, shall be removed; to be taken out in mid-ships immediately above the turn of the bilge, and *at such height* forward and aft as may, in their judgment, best expose the timbers of the frame to view; that a special report of the state of these timbers, and of the general state and condition of the upper deck fastenings, waterways, spirketting, planksheers, topsides, upper deck with its appendages, lower deck fastenings, wales, counter, plank and treenails outside to the water's edge, rudder, windlass and capstan, beams and breasthooks, shall be transmitted by the Surveyors to the Committee; and on the receipt of such report the character shall be assigned. If the Æ character be then assigned, it shall be continued (subject to an annual survey) for a period not exceeding the number of years originally assigned; at the expiration of which the character will be discontinued, unless a similar survey and examination of the frame be again submitted to.

SHIPS E

64. Will comprise all ships which shall be found on survey fit for the conveyance of cargoes not in their nature subject to sea damage *on any voyage*.

* In all cases in which a rider keelson is fitted, it must be fastened as prescribed above, irrespective of the relative dimensions of the ship.

65. Subject to occasional inspection, at least once in every two years, ships will continue in this class so long as their condition shall, in the opinion of the Committee, entitle them thereto.

SHIPS I

66. Will comprise ships which shall be found on survey fit for the conveyance, *on shorter voyages* (not out of Europe), of cargoes in their nature not subject to sea-damage.

67. The Bottom of every ship is to be CAULKED* once in every five years, unless wood-sheathed and felted, and then once in every seven years, except in the case of *Teak-built ships*, upon which a special survey may have been requested, and the Surveyors having ascertained, by the removal of a strake of sheathing fore and aft under the wales, and a strake at the first foothook heads, and by causing listings to be cut out at the wood's ends, that such caulking is not required, the same may then be dispensed with. If any ship shall be stripped within the periods above mentioned, her bottom is to be caulked, *if necessary*.

68. In all cases in which ships may be doubled, doubling of not less than the thicknesses hereinafter mentioned will be required, the same to be properly wrought and fastened as follows: in every instance the doubling is to be at least single fastened either with treenails or with bolts, and a through bolt in every butt. If treenails be used, every treenail must, if practicable, be a through fastening; and if bolts be used, then one-sixth of them from the lower part of the bilge upwards must be through and clenched on the ceiling in addition to the butt bolts. In all cases of doubling, the rudder braces are to be removed.

The throat bolts of iron knees, and the bolts of iron hooks, crutches, and pointers, must be renewed through the doubling.

The thickness of the doubling for the wales and bottom, on ships

Under 400 tons to be not less than	...	2 inches
of 400 „ and under 600 tons	...	2½ „
of 600 „ and above	...	3 „

* In cases where ships have been doubled with doubling of less thickness than is required by, or not fastened in accordance with, the rules, it will not be imperative that such doubling be stripped at the expiration of seven years as required for ordinary sheathing; but if, upon survey, the doubling be found in good condition, the period for its remaining on may be extended, with the sanction of the Committee, to a term not exceeding ten years, provided the doubling below the wales be copper or yellow metal fastened or treenailed.

On the Topsides of ships not exceeding 300 tons, the thickness may be $1\frac{1}{2}$ inches.

Where ships are *diagonally* doubled, the thickness of the materials for *wales and bottom* may be $\frac{1}{2}$ an inch less than prescribed above, but in no case to be less than two inches thick.

No ship hereafter doubled, shall be entitled to the character A in red, or any higher class, unless it shall be ascertained at the time of doubling that the frame is capable of securely retaining the fastenings.


IRON-FASTENED SHIPS.

69. All ships although iron-fastened (except as hereinafter mentioned) shall be classed in the same manner as copper-fastened ships, so long as they remain unsheathed with copper, provided they are, in all other respects, constructed in accordance with the Rules; but when sheathed with copper over the iron fastenings, the words "Coppered over Iron Bolts" shall be added to the character in the Register Book, and continued until the ship be thoroughly copper-fastened.

70. Ships built in India, although fastened with iron, shall be permitted to be copper-sheathed without any mark being placed in the Book, provided the bottom be felted or chunamed and wood-sheathed, and subjected to a careful examination of the iron fastenings on every occasion on which the sheathing is stripped off, for which purpose some of the bolts and nails are to be taken out of the lower part of the bottom, and to be seen by the Surveyor; but no such ship shall be permitted to continue either on the A or on the A in red class for a longer period than one-half the number of years beyond the term originally assigned for her remaining on the A character, unless the bottom shall have been doubled, or the whole of the iron fastenings taken out or properly secured, and the bottom refastened with bolts, or tree-nails, or both, including the middle line, breasthook, and crutch bolts.

ANCHORS, CABLES, AND STORES.

71. All vessels are required to have their masts, spars, and standing rigging in good order, and sails in sufficient number and good condition, and every ship is to be supplied with a good hempen stream-cable or hawser of sufficient size and length, and with at least one good warp; and all vessels are to be provided with anchors of proper weight, and cables of approved quality and size, properly tested, in number and length according to the following scale:—

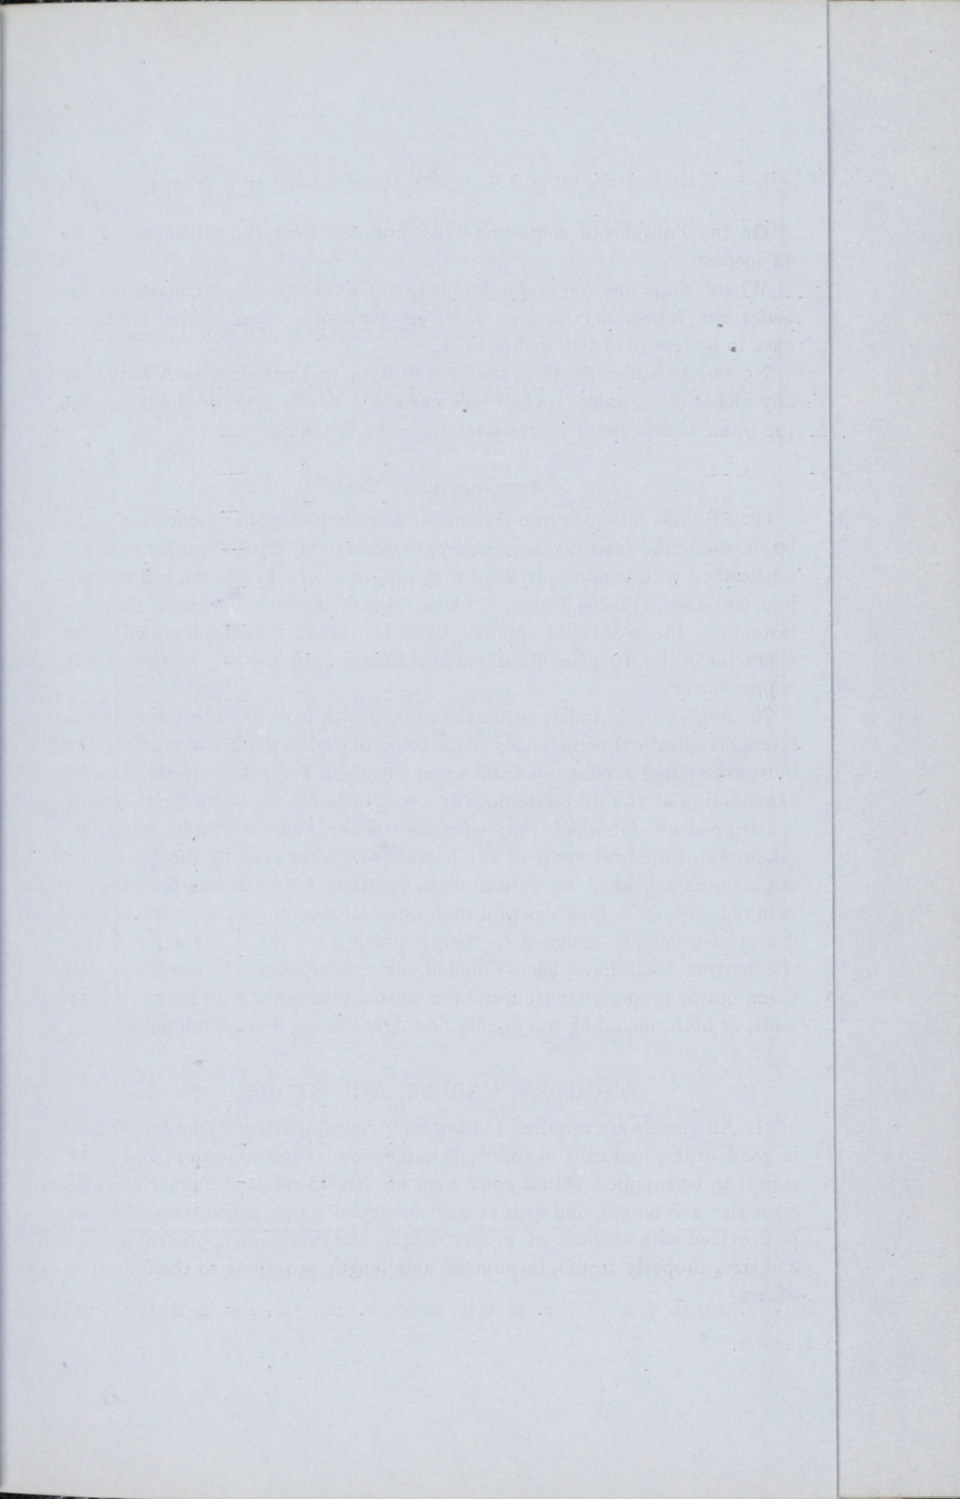

Weights of Ordinary Anchors, Sizes and Lengths of Chain Cables, and Sizes and Lengths of Hawser and Warps, to be recommended when the Surveyors are applied to by Ship Builders and Ship Owners.

SHIP'S TONNAGE.	ANCHORS.								CHAINS.		HAWSERS AND WARPS.				SHIP'S TONNAGE.
	Number.			Weight.					Size.	Length.	*Stream.	Hawser.	Warp.	Length.	
	Bowers	Stream.	Kedges.	Wood Stock	Iron Stock.	Stream.	Kedge.	2nd Kedge.							
Tons.				Cwts.	Cwts.	Cwts.	Cwts.	Cwts.	Inches.	Fathoms.	Inch.	Inch.	Inch.	The Length of them to be 90 fathoms each.	Tons.
50	2	1	1	3	4	1½	—	—	1½	120	5	3	—		50
75	2	1	1	4	5	1¾	—	—	1½	120	5	3	—		75
100	2	1	1	5	7	2½	1¼	—	1½	150	5½	3	—		100
150	2	1	1	8	10	3½	1¾	—	1	180	6	4	—		150
200	3	1	1	10	12	4½	2¼	—	1	180	6½	4	—		200
250	3	1	2	13	15	5	2½	—	1½	200	7	5	—		250
300	3	1	2	15	17	6	3	—	1¼	200	7½	5½	—		300
350	3	1	2	17	20	6½	3¼	—	1¾	240	7½	5½	—		350
400	3	1	2	19	22	7½	3¾	—	1¾	240	8	6	—		400
500	3	1	2	23	26	9	4½	—	1½	270	9	7	—		500
600	3	1	2	26	30	10	5	2½	1½	270	9½	7	4		600
700	3	1	2	29	34	11	5½	2¾	1½	300	10	8	5		700
800	3	1	2	31	36	12	6	3	1¾	300	10	8	5		800
900	3	1	2	33	39	12	6½	3¼	1¾	300	10	9	5½		900
1000	3	1	2	35	41	12	6¾	3¼	1¾	300	10	9	5½		1000
1100	3	1	2	37	44	12	7	3½	1¾	300	10	9½	6		1100
1200	3	1	2	39	46	12	7½	3¾	1¾	300	10	9½	6		1200
1400	3	1	2	41	48	12	7¾	4	2	300	10	10	6		1400
1600	3	1	2	43	50	14	8¼	4	2	300	11	10½	6½		1600
1800	3	1	2	45	52	14	8½	4¼	2½	300	11	11	7	1800	
2000	4	1	2	47	54	14	9	4½	2½	300	11	11	7	2000	

* The Stream Cables may be of iron, of proportionate sizes.

Chains tested at a *Public Machine* up to the Admiralty test, and marked as so tested, may be ⅛ in. less in those of 1 in. to 1¼ in. diameter, and ⅛ in. less in those above 1¼ in. diameter.

2, *White Lion Court, Cornhill,*

30th September, 1858.

ANCHORS.

72. All vessels under 200 tons to have at least two bower anchors, and all vessels of 200 tons and above, to be provided with at least three bower anchors.

Cables.

	Tons.	Fathoms.
73. All vessels under 100 to have at least 120 if chain.		
— of 100 and under 150	150	do.
— 150 250	180	do.
— 250 350	200	do.
— 350 500	240	do.
— 500 700	270	do.
— 700 and upwards	300	do.

See also Table No. 22, annexed.

The length and condition of the Chain Cables are to be ascertained by removal from the lockers on every Special Survey for Classification.

A Certificate of all new Chains having been tested, and of the strain applied to them, must be produced before a Ship is classed. The amount of strain applied should be marked on each length.

74. In all cases where hempen cables are used, one-sixth more in length will be required.

BOATS.

75. All vessels under 150 tons to be provided with one good Boat; and every vessel of 150 tons and above to have a suitable number.

76. The efficient state and condition of ships' anchors, cables, and stores, will be designated by the figure 1; and where the same are found insufficient in quantity, or defective in quality, by the figure 2.

SHIPS NAVIGATED BY STEAM.

77. Steam ships are to be subject to the same periodical surveys as sailing vessels, and whenever the boilers are taken out, the vessel is to be submitted to a particular and special survey, in order to ascertain her general condition.

78. That with respect to the Boilers and Machinery, the Owners are required to produce to the Surveyors at the above-directed surveys, a certificate from some competent *Master Engineer*, describing their state and condition at those periods; and to which certificate it is desirable there should be added a description of the particulars of the same, as far as may be practicable, in the manner and form annexed, No. 8; to be appended to the report of survey, and delivered to the Committee, who will thereupon insert

in the Register Book the letters "M.C." denoting that the boilers and machinery have been inspected and certified to be in good order and safe working condition ; but if no certificate of their condition be furnished by the Owner or Master, then no character can be assigned for the machinery.

79. HULL:—The Surveyors are directed to examine and report the scantling of timbers, plank, and fastenings, and to state where built, and by whom, in the same manner as directed for sailing vessels.

80. The Surveyors are required to report the number, size, length, fastenings, and mode of arrangement of the engine and boiler *sleepers*, and the description of timber of which they are composed, and whether diagonally trussed with wood or iron, and to what extent ; the length, size, and fastenings of shelf-pieces and paddle-beams ; and whether the vessel be constructed with sponcings, and how they are formed ; and to give the length and shifting of the plank outside and inside.

81. MATERIALS AND STORES:—The Surveyors are to examine and report the number and description of the masts, sails, anchors, cables, hawsers, warps, and boats, as directed to be done for sailing vessels ; but the anchors and cables will not be required to exceed in weight and length those of a sailing vessel of two-thirds of the total tonnage of the steam-vessel.

82. The Surveyors are to be particular in examining and reporting the condition of the boats of all vessels employed in carrying passengers.

The attention of Ship-builders and Shipowners is respectfully invited to the footnote in the Rules for iron ships, page 33, *requiring additional securities in ships of extreme length in proportion to their breadth or depth* ; also to the amendments in sections 1, 7, and 8, requiring the Manufacturer's name, and the place where made to be stamped on both sides of all plates, and beam and angle iron, &c.

It has also been made a Regulation that the Windlass of all ships be examined by unhangng and stripping wood linings *at periods not exceeding one-half the time of original classification, and at all Special Surveys under the Rules.*

By order of the Committee,

GEORGE B. SEYFANG,

Secretary.

2, White Lion Court, Cornhill.

1st July, 1860.

iron
air-
me.

Stern
er

mes,
c.

GEORGE H. BENT

White Pine Ore, Calif.
1st July 1888

TABLE A.

EXHIBITING THE NUMBER OF YEARS ASSIGNED TO THE DIFFERENT DESCRIPTIONS OF TIMBER, OF GOOD QUALITY, AS USED IN THE TIMBERING AND PLANKING OF SHIPS.

		TIMBERING.									Rudder and Windlass. — Main Pieces.	OUTSIDE PLANK.					INSIDE PLANK.			
		Floors.	First Foothooks.	Second Foothooks.	Third Foothooks and Top Timbers.	Main and Rider Keelsons.	Stem and Stern Post.	Transoms, Knight-heads, Hawse-Timbers, Apron, and Deadwood*	Beams and Hooks.	Knees.		Keel to First Futtock Heads.	First Futtock Heads to Light Mark	Light Mark to Wales.	Wales, Black-Strakes, Topsides, and Sheer-strakes.	Upper deck Spirk'ting, and Planksh'rs.	Limber Strakes and Bilge Strakes.	Ceiling: Lower Hold and between Decks.	Shelf Pieces Clamps, & Lower Dk Waterway	
1	English, African, and Live Oak, East-India Teak, Morung Saul, Greenheart, Morra, & Iron Bark	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	English, African, and Live Oak, East-India Teak, Morung Saul, Greenheart, Morra, & Iron Bark	1	
2	Mahogany of Hard Texture and Cuba Sabicu and Pencil Cedar	10	10	10	10	10	10	12	12	10	12	12	10	10	10	12	12	Mahogany of Hard Texture and Cuba Sabicu and Pencil Cedar	2	
3	Adriatic, Spanish, and French Oak	10	10	9	9	10	9	9	10	9	12	12	10	9	10	12	12	Adriatic, Spanish, and French Oak	3	
4	†Red Cedar, Angelly, and Venatica	9	9	9	9	10	9	9	10	—	12	12	12	10	10	12	12	†Red Cedar, Angelly, and Venatica	4	
5	Other Continental W. Oak, Span. Ches., Stringy Bark, & Blue Gum	9	9‡	7	7	9	7	7	8	7	12	12	9	8	9	10	10	Other Continental W. Oak, Span. Ches., Stringy Bark, & Blue Gum	5	
6	North American White Oak and American Sweet Chesnut.....	8	8‡	7	7	8	7	7	7	7	12	10	8	7	7	9	9	North American White Oak and American Sweet Chesnut	6	
7	Larch, Hackmatack, Tamarac, and Juniper	7	7	7	7	8	7	7	7	7	12	10	8	7	10	7	8	Larch, Hackmatack, Tamarac, and Juniper	7	
8	Pitch Pine	7	7	7	7	9	7	7	8	7	12	12	9	9	10	9	9	Pitch Pine	8	
9	Second-hand English Oak, African Oak, and East-India Teak	7	7	6	6	6	5	6	6	5	—	—	—	—	5	5	5	Second-hand English Oak, African Oak, and East-India Teak	9	
10	Cowdie	6 ¶	6	6	7	7	6	6	7	—	10	9	8	7	10	7	8	Cowdie	10	
11	Baltic and American Red Pine. .	5	5	5	7	7	5	5	7	5	9	9	8	7	10	7	8	Baltic and American Red Pine	11	
12	English Ash	7	6	5	5	5	4	4	5	5	10	7	4	—	—	5	5	English Ash	12	
13	Foreign Ash	5	5	4	4	5	4	4	5	—	10	7	4	—	—	5	5	Foreign Ash	13	
14	American Rock Elm	6 ¶	6	5	5	6	5	5	5	4	12§	8	6	5	5	7	6	American Rock Elm	14	
15	European and American Grey Elm	5	5	4	4	4	4	4	5	—	12§	8	5	4	4	5	5	European and American Grey Elm	15	
16	Black Birch	5 ¶	5**	4	4	4	4	4	4	4	10	7	4	4	4	5	5	Black Birch	16	
17	Spruce Fir	5	5**	4	4	4	4	4	4	4	6	6	5	4	4	5	5	Spruce Fir	17	
18	English Beech	5 ¶	4	—	—	4	—	—	—	4	12§	8	4	—	—	5	5	English Beech	18	
19	Yellow Pine	—	—	—	4	4	4	4	4	—	6	5	5	5	5††	5	5	Yellow Pine	19	
20	Hemlock	4	4	4	4	—	—	—	4	—	4	4	4	4	4	4	4	Hemlock	20	

* This Table applies as to the Deadwood so far as regards the Material to be used from the height two feet above the rabbet of the Keel. † Live Oak and Red Cedar admitted alternately in Timbers of the Frame for 10 A.

‡ If the First Foothooks run up above the Light Watark, the use of Foreign White Oak is allowed for the 7 years' grade only.

§ The use of Elm and Beech, in Ships above the 8 years' grade, to be restricted to a height from the lower part of the Mainel, of one-third of the internal depth of the Ship measured, in midships, from the top of the Limber Strake to the top of the Upper Deck Beams.

¶ Black Birch, Beech, American Rock Elm, and Cowdie, allowed for Floors in Ships, to an extent not exceeding one-half the entire length of the Keel, in Ships of the 7 years' grade.

** Black Birch and Spruce allowed for First Foothooks amidships, to the same extent in Ships of the 6 years' grade.

†† Yellow Pine allowed for Waterways of Upper Deck in Ships of the 7 years' grade, if properly fastened, as prescribed in Table B, and provided the Beams are well secured independently of the Waterways.

MEM.—The "English" includes Timber the growth of the United Kingdom. — For relaxation in favour of Steam Vessels, vide Rules, page 24.

|| The Materials marked thus || under the heading "Rudder and Windlass," allowed in Ships of 300 Tons and under only.

TABLE B.

MINIMUM DIMENSIONS OF TIMBERS, KEELSON, KEEL, PLANKING, &c.

TONNAGETons....	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1050	1150	1250	1350	1500	1750	2000
*TIMBER AND SPACEINCHES..	18	19	20	21½	23	24¼	25¾	27¼	28½	30	30¾	30½	31	31¼	31½	31¾	32¼	32½	32¾	33¼	33½	33¾	34	34½	35	
Floors, sided and moulded at Keelson, if squared	7	7½	8	8¾	9½	10¼	11	11¾	12¼	13	13¾	13½	13¾	13¾	13¾	14	14	14¼	14½	14¾	15	15¼	15½	15¾		
Double Floors, sided and moulded at Keelson, if squared....	6	6½	7	7¾	8½	9¼	10	10½	11¼	12	12¾	12½	12¾	12¾	12¾	13	13	13¼	13½	13¾	14	14¼	14½	14¾		
1st Futtocks, sided and moulded at Floor Heads, if squared..	6	6½	7	7¾	8½	8¾	9¼	10	10½	11	11¾	11½	11¾	11¾	12	12¼	12½	12¾	13¼	13½	13¾	14¼	14½	14¾		
2nd Futtocks, sided, if squared	5½	6	6½	7	7½	8	8½	9	9½	10	10¼	10½	10¾	10¾	11	11¼	11½	11¾	12¼	12½	12¾	13¼	13½	13¾		
3rd Futtocks and Long Top Timbers, sided, if squared.....	5½	5¾	6	6½	7	7¼	7¾	8¼	8½	9	9¼	9½	9¾	9¾	10	10¼	10½	10¾	11¼	11½	11¾	12¼	12½	12¾		
Top Timbers (Short) sided, if squared	9	9¼	9½	9¾	9¾	9¾	9¾	9¾	9¾	10	10	10¼	10½	10¾	10¾	11		
Top Timbers, moulded at heads, if squared	4	4½	4¾	5	5	5¼	5½	5¾	6	6	6¼	6½	6¾	6¾	6¾	6¾	7	7	7¼	7½	7¾	8½	8½	8¾		
Breasthooks & Wing Transom, sided & moulded in the middle	8	8½	9	9¾	10¼	10¾	11¼	12	12½	13	13¼	13½	13¾	13¾	13¾	13¾	14	14	14¼	14½	14¾	15	15¼	15½		
**Keel, Stem, Apron, and Sternpost, sided and moulded	8	9	10	10¾	11¼	11¾	12¼	13	13½	14	14¼	14½	14¾	14¾	14¾	14¾	15	15	15¼	15½	15¾	16	16¼	16½		
Keelson, sided and moulded.....	9	10	11	11¾	12¼	12¾	13¼	14	14½	15	15¼	15½	15¾	15¾	15¾	15¾	16	16	16¼	16½	16¾	17	17¼	17½		
†Wales.....	3	3½	4	4¼	4½	4¾	4¾	4¾	5	5	5	5	5¼	5½	5½	5½	5½	5½	5¾	6	6	6	6¼	6½		
‡Bottom Plank, from Keel to Wales.....	2	2¼	2½	2¾	3	3¼	3½	3¾	3¾	4	4	4	4	4	4	4¼	4½	4½	4½	4½	4½	4½	4½	4¾		
Sheer Strakes, Topsides, Upper Deck Clamp where there is no Shelf fitted, and Lower Deck Clamp with a Shelf	2¼	2½	3	3¼	3½	3¾	3¾	3¾	4	4	4	4	4	4	4	4¼	4½	4½	4½	4½	4½	4½	4½	4¾		
Ceiling below Hold Beam Clamp	1½	1¾	2	2¼	2½	2¾	2¾	2¾	3	3	3	3¼	3½	3½	3½	3½	3½	3½	3½	3¾	3¾	4	4¼	4½		
§Waterway, { Hardwood.....	3½	4	4½	5	5	5½	5½	6	6	6½	6½	6½	7	7	7	7	7½	7½	7½	7½	7½	8	8	8½		
{ Fir	4	4½	5	5½	6	6½	6½	7	7½	8	8	8	8½	8½	8½	8½	9	9	9	9	9	9½	9½	9½		
Ceiling betwixt Decks	1½	1¾	2	2	2¼	2¼	2¼	2½	2½	2½	2½	2½	2½	2¾	2¾	2¾	2¾	2¾	2¾	2¾	3	3	3	3¼		
Bilge Plank, inside, Thick Strakes over long and short Floorheads, and Limber Strake	2½	2¾	3	3¼	3½	3¾	3¾	3¾	4	4	4¼	4½	4½	4½	4½	4½	5	5	5¼	5½	5¾	6	6¼	6½		
Lower Deck Clamp where there is no shelf fitted, and Spirketting	3	3¼	3½	3¾	4	4	4¼	4½	4½	4¾	4¾	4¾	4¾	4¾	5	5	5	5¼	5½	5½	5½	5¾		
Upper Deck Clamp where a shelf is also fitted.....	2	2¼	2½	2¾	2¾	2¾	2¾	3	3	3	3¼	3½	3½	3½	3½	3½	3½	3½	3½	3¾	3¾	4	4	4¼		
Planksheer	2	2¼	2½	2¾	3	3¼	3½	3¾	3¾	4	4	4	4	4	4	4	4	4	4	4	4	4	4¼	4½		
Flat of Upper Deck	2½	2½	2½	2½	2½	3	3	3	3	3½	3½	3½	3½	3½	3½	3½	3½	3½	3½	4	4	4	4	4		
Scarphs of Keelson without Rider	ft. in. 4 6	ft. in. 4 9	ft. in. 5 0	ft. in. 5 3	ft. in. 5 6	ft. in. 5 10	ft. in. 6 2	ft. in. 6 6	ft. in. 6 9	ft. in. 7 0	ft. in. 7 0	ft. in. 7 0	ft. in. 7 0	ft. in. 7 0	ft. in. 7 3	ft. in. 7 3	ft. in. 7 3	ft. in. 7 3	ft. in. 7 6	ft. in. 7 6	ft. in. 7 9	ft. in. 7 9	ft. in. 8 0	ft. in. 8 0		
Ditto, where Rider Keelson is added, also Scarphs of Keel ..	4 0	4 3	4 6	4 9	5 0	5 2	5 4	5 6	5 9	6 0	6 0	6 0	6 0	6 0	6 3	6 3	6 3	6 3	6 6	6 6	6 9	6 9	7 0	7 0		

Moulding of Futtocks and Top Timbers to diminish gradually from size given at Floor Heads to that at Top Timber Heads. See Rule, sec. 38.

* Should the timber and space be increased, the siding of the timbers to be increased in proportion. See Rules, Sec. 39.

** The rabbet of the Keel, Stem, and Sternpost to be made so as to leave a sufficient substance of wood to form a substantial back rabbet.

‡ All the fore and after hoods, both outside and inside, may be reduced one-sixth in thickness. Furrans are not allowed in this or in any other part of a ship.

§ This Depth of Waterway for Faying Surface against Timbers is required, below the underside of the Planksheer, to receive in and out through Bolts at alternate Timbers, with alternate through bolts in Shelf and in Clamp where there is no Shelf.

MEM.—For relaxations in respect to Poops, Top-gallant forecastles, and raised quarter decks, see Rules, sec. 38. For requirements for Vessels the length of which shall exceed five times their breadth, see Rules, Secs. 39 and 62.

TABLE C.

SIDING AND MOULDING OF BEAMS.—Sec. 41.

LENGTH OF BEAM amidships.	HOLD BEAMS		DECK BEAMS	
	sided and moulded.	at ends.	sided and moulded.	at ends.
	Feet	Inches.	Inches.	Inches.
10	—	—	4½	3½
11	—	—	5	4
12	—	—	5¼	4¼
13	—	—	5½	4½
14	—	—	5¾	4¾
15	8	6¾	6¼	5¼
16	8½	7	6½	5½
17	8¾	7½	6¾	5¾
18	9¼	7¾	7	5¾
19	9½	8	7¼	6
20	10	8½	7½	6¼
21	10¼	8¾	7¾	6½
22	10½	9	8	6½
23	11	9¼	8¼	6¾
24	11¼	9½	8½	7
25	11¾	9¾	8¾	7¼
26	12	10	8¾	7¼
27	12¼	10¼	9	7½
28	12½	10½	9	7½
29	12¾	10¾	9¼	7¾
30	13	11	9½	8
31	13¼	11¼	9¾	8
32	13½	11½	9¾	8¼
33	13¾	11¾	10	8¼
34	14	11¾	10	8½
35	14¼	12	10¼	8½
36	14½	12¼	10½	8½
37	14¾	12½	10½	8¾
38	15	12½	10¾	8¾
39	15¼	12¾	10¾	9
40	15½	13	10¾	9

N.B.—The size of Orlop Beams to be the mean of the sizes here prescribed.

The siding and moulding of all the Beams to be the same as those amidships, except those at the after end of the ship, which may be reduced in proportion to their diminished length. MEM.—When Spruce or Yellow Pine is used for Beams the dimensions are to be increased. — See Rules, Sec. 40.

TABLE D.

SIZES OF BOLTS, PINTLES OF RUDDER, AND TREENAILS. Section 46.

TONNAGE	50	100	150	200	250	300	350	400	450	500	700	900	1350
Heel-Knee, Stemson, and Deadwood Bolts	$\frac{14}{16}$	$\frac{15}{16}$	1	1	$1\frac{1}{16}$	$1\frac{2}{16}$	$1\frac{2}{16}$	$1\frac{3}{16}$	$1\frac{4}{16}$	$1\frac{4}{16}$	$1\frac{5}{16}$	$1\frac{6}{16}$	$1\frac{8}{16}$
Bolts in Sister Keelsons, Scarphs of Keel,* Arms of Breast Hooks, Pointers, Crutches, Riders, Hanging and Lodging Knees to Hold or Lower Deck Beams (except in and out Throat Bolts of Hanging Knees, which must be larger), also in and out Bolts of Shelf, Clamp, and Waterway of Hold or Lower Deck Beams, and the in and out Throat Bolts of Upper Deck Hanging Knees.	$\frac{11}{16}$	$\frac{12}{16}$	$\frac{12}{16}$	$\frac{12}{16}$	$\frac{13}{16}$	$\frac{14}{16}$	$\frac{14}{16}$	$\frac{15}{16}$	$\frac{15}{16}$	1	$1\frac{2}{16}$	$1\frac{3}{16}$	$1\frac{4}{16}$
Keelson Bolts (one through Keel at each Floor), Throats of Transoms, Throats of Breasthooks, and Throats of Hanging Knees to Hold or Lower Deck Beams	$\frac{12}{16}$	$\frac{13}{16}$	$\frac{14}{16}$	$\frac{14}{16}$	$\frac{15}{16}$	1	1	$1\frac{1}{16}$	$1\frac{2}{16}$	$1\frac{2}{16}$	$1\frac{3}{16}$	$1\frac{4}{16}$	$1\frac{6}{16}$
Bilge, Limber Strake, and Through Butt Bolts	$\frac{9}{16}$	$\frac{10}{16}$	$\frac{10}{16}$	$\frac{11}{16}$	$\frac{11}{16}$	$\frac{12}{16}$	$\frac{12}{16}$	$\frac{13}{16}$	$\frac{13}{16}$	$\frac{14}{16}$	$\frac{14}{16}$	$\frac{15}{16}$	1
Other Butt Bolts.....	$\frac{9}{16}$	$\frac{10}{16}$	$\frac{10}{16}$	$\frac{10}{16}$	$\frac{11}{16}$	$\frac{11}{16}$	$\frac{11}{16}$	$\frac{12}{16}$	$\frac{12}{16}$	$\frac{12}{16}$	$\frac{12}{16}$	$\frac{13}{16}$	$\frac{14}{16}$
In and out Bolts of Upper Deck Waterway, Shelf and Clamp, also Arms of Hanging and Lodging Knees, except in and out Throat Bolts of Hanging Knees, which must be larger.)	$\frac{10}{16}$	$\frac{11}{16}$	$\frac{11}{16}$	$\frac{11}{16}$	$\frac{12}{16}$	$\frac{13}{16}$	$\frac{13}{16}$	$\frac{14}{16}$	$\frac{14}{16}$	$\frac{14}{16}$	$\frac{15}{16}$	1	$1\frac{2}{16}$
Pintles of Rudder { The Braces of which must extend so as to receive not less than Two Bolts on the Planking on each side.	$1\frac{7}{8}$	2	2	$2\frac{1}{4}$	$2\frac{3}{8}$	$2\frac{1}{2}$	$2\frac{5}{8}$	$2\frac{3}{4}$	3	3	$3\frac{1}{4}$	$3\frac{1}{2}$	$3\frac{1}{2}$
Hardwood Treenails	1	1	1	$1\frac{1}{8}$	$1\frac{1}{8}$	$1\frac{1}{8}$	$1\frac{1}{4}$	$1\frac{1}{4}$	$1\frac{1}{4}$	$1\frac{3}{8}$	$1\frac{3}{8}$	$1\frac{3}{8}$	$1\frac{1}{2}$

* NUMBER OF BOLTS IN SCARPHS OF KEEL:—

In Ships of 150 Tons and under 6 Bolts

,, above 150 Tons and under 500 Tons 7 do.

,, 500 Tons and above 8 do.

N.B.—Bolts to be through and clenched, as prescribed in Section 46.

Lloyd's Register of Shipping,
9th June, 1859.

TABLE E.

NUMBER OF HANGING KNEES
Section 41.

Tons.	To Hold Beams. PAIRS.	To Upper Deck Beams. PAIRS.
150	—	4
200	4	6
250	5	7
300	6	8
350	7	9
400	8	10
450	8	11
500	9	12
550	9	13
600	10	14
650	10	15
700	11	16
750	11	17
800	12	18
900	13	20
1000	14	22
1100	15	24
1350	17	26

TABLE F.

MINIMUM DIMENSIONS OF IRON KNEES AND KNEE RIDERS FOR BRITISH NORTH AMERICAN BUILT SHIPS AND FIR SHIPS.—Section 62.

TONNAGETons	150	200	250	300	350	400	450	500	550	600	650	700	750	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Number of Hanging Knees to Hold or Lower Deck BeamsPairs	3*	4	6	8	9	Upwards, one Knee Rider to every Beam, or Knees and Riders as per Section 62																				
Number of Hanging Knees to Upper and Middle Deck BeamsPairs	4	6	7	8	9	10	11	12	13	14	15	16	17	18	Upwards, one to every Beam											
Breadth of Knees and Riders to Hold or Lower Deck BeamsInches	3	3	3	3	3	3	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{3}{4}$	3 $\frac{3}{4}$	4	4	4 $\frac{1}{4}$	4 $\frac{1}{4}$	4 $\frac{1}{2}$	4 $\frac{1}{2}$	4 $\frac{3}{4}$	4 $\frac{3}{4}$	5	5	5 $\frac{1}{4}$	5 $\frac{1}{4}$	5 $\frac{1}{2}$	5 $\frac{1}{2}$
Breadth of Upper Deck Knees, where there are two Decks, and of Middle Deck Knees, where there are three DecksInches	3	3	3	3	3	3	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{3}{4}$	3 $\frac{3}{4}$	4	4	4 $\frac{1}{4}$	4 $\frac{1}{4}$	4 $\frac{1}{2}$	4 $\frac{1}{2}$	4 $\frac{1}{2}$	4 $\frac{1}{2}$	4 $\frac{3}{4}$	4 $\frac{3}{4}$	4 $\frac{3}{4}$	4 $\frac{3}{4}$
Thickness of Riders at the joints or butts of the TimbersInches	1 $\frac{1}{4}$	1 $\frac{1}{4}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{3}{4}$	1 $\frac{3}{4}$	2	2	2 $\frac{1}{4}$	2 $\frac{1}{4}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	3	3	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{3}{4}$	3 $\frac{3}{4}$
Thickness of Knees to Lower Deck or Hold Beams and Knee Riders at the Angle of the ThroatInches	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	3	3	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{3}{4}$	3 $\frac{3}{4}$	4	4	4 $\frac{1}{4}$	4 $\frac{1}{4}$	4 $\frac{1}{2}$	4 $\frac{1}{2}$	4 $\frac{3}{4}$	4 $\frac{3}{4}$	5	5	5 $\frac{1}{4}$	5 $\frac{1}{4}$	5 $\frac{1}{2}$	5 $\frac{1}{2}$
Thickness of Knees to Lower Deck or Hold Beams and Knee Riders at the Throat Bolts.....Inches	1 $\frac{3}{4}$	1 $\frac{3}{4}$	2	2	2 $\frac{1}{4}$	2 $\frac{1}{4}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	3	3	3	3	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{3}{4}$	3 $\frac{3}{4}$
Thickness of Knees to Upper or Middle Deck at the Throat Bolts †Inches	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{3}{4}$	1 $\frac{3}{4}$	2	2	2 $\frac{1}{4}$	2 $\frac{1}{4}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	3	3	3	3	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$
Thickness of Hanging Knees (not Riders) at the endsInches	$\frac{5}{8}$	$\frac{5}{8}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{7}{8}$	$\frac{7}{8}$	$\frac{7}{8}$	$\frac{7}{8}$	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Length of Beam Arms of Knees and Knee Riders for Lower Deck or Hold Beams ‡ ...	ft. 2 in. 6	ft. 2 in. 6	ft. 2 in. 9	ft. 2 in. 9	ft. 3 in. 0	ft. 3 in. 0	ft. 3 in. 3	ft. 3 in. 3	ft. 3 in. 3	ft. 3 in. 6	ft. 3 in. 6	ft. 3 in. 6	ft. 3 in. 9	ft. 3 in. 9	ft. 3 in. 9	ft. 3 in. 9	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0	ft. 4 in. 0

NOTE.—The Bolts in all Iron Riders in Hold, to be not more than twenty-one inches apart on the average.

Standards upon the Beams of such Ships are not admitted as substitutes for Hanging Knees below them.

For sizes of Bolts, see Table D.

* Provided the depth of hold be 13ft. or upwards.

† Breadth and thickness of Knees for Upper Deck, where there are Three Decks, may be one sixth less.

‡ Beam Arms of Upper and Middle Deck Knees, may be three inches shorter than those of the Lower Deck.

Side Arms of Hanging Knees not to be less in length, than one and a half the length of their Beam Arms.

Beam Arms of Knees and Knee Riders, which are 3ft. 6in. in length, to have not less than Four Bolts, and shorter than that length, to have not less than Three Bolts.

Side Arms of all Hanging Knees to have at least One Bolt more than in the Beam Arms.

RULES FOR THE BUILDING OF SEA-GOING IRON SHIPS, OF ALL DESCRIPTIONS, WHETHER SAILING OR NAVIGATED BY STEAM.*

1. The whole of the iron to be of good malleable quality, and the manufacturer's name, and the place where made, to be stamped on both sides of all plates and beam and angle iron, and also to be stated in the report of survey; the workmanship to be well executed, and to be submitted to the closest inspection before coating or painting, and any brittle or inferior article to be rejected. It is not intended to prevent the coating of the plates inside in the way of the frames.

Quality of Iron
and Workman-
ship.
Maker's Name.

2. The keel, stem, stern, and propeller posts are to be scarphed or welded together at discretion, and to be in size according to Table G; if scarphed, the length of scarphs to be regulated in the proportion of eight times the thickness given in the table for keels, and the stern posts, and after end of keel, for screw propelled vessels, to be double the thickness of, or twice the sectional area of, the adjoining length of keel (but the siding in no case to be less than the thickness of the keel), and to be tapered fair into the adjoining length of keel. Where the garboard strakes are thicker than required by the rules, and extend to the bottom of the keel, the thickness of the keel may be proportionably reduced, but such reduction not to exceed one-third of the requisitions of the Rule. Where the keel and keelsons are made of several thicknesses of plates, the plates that form the keel to be in thickness, taken together, the same as is required for a solid keel, as per Table G; and the butts of the several plates of which the keel is formed to be carefully shifted from each other, and from the butts of the garboard strakes, which in all cases must also be shifted, so as not to be opposite each other.

Keel, Stem, Stern
and Propeller
Posts.

3. The spacing and dimensions of the ribs or frames, to be as per Table G, and the ribs or frames in as great lengths as possible, and to be fitted close on to the upper edge of the keel, and in all cases to extend to the gunwale, and wherever butted, to have not less than four feet lengths of corresponding angle iron fitted back to back to cover and support the butts and receive

Ribs of Frames,
Spacing, &c.

* The scantlings given in Table G are intended for ships, the length of which measured from the fore part of the stem to the after part of the stern-post, on the range of the upper deck, does not exceed seven times their extreme breadth, or ten times their depth of hold, taken from the upper part of floors to the top of the upper deck beams.

For ships which are intended to exceed in length the above-named proportions, the builders or owners are to submit for the committee's approval their plans, with full particulars, for giving the vessel sufficient additional strength longitudinally, either by doubling or thickening the sheer-strake and increasing the size of the stringer plates, or otherwise.

the plating. And if welded together, the welds to be perfect, and the shifts not to be less than four feet.

Floor Plates.

4. The floor plates to be in thickness as per Table G, and to extend beyond the bilge keelsons, and to be in depth at middle line not less than one inch for every foot of the vessel's depth, measured from the top of upper or spar deck beams to top of floor plate, and not to be less in depth at the bilge keelsons than the moulding of the frame. A floor plate to be fitted and rivetted to every frame, and at the ends of the vessel the floor plates to be worked across the middle line so as to support and unite the sides of the vessel efficiently to each other.

Reversed Angle Iron.

5. Reversed angle iron on frames to be in size as per Table G. All vessels, of whatever size, to have reversed angle iron rivetted to every frame and floor plate across the middle line to the height of upper part of bilges, and to have double reversed angle iron in way of all keelsons; and in addition all vessels of 300 tons and upwards to have reversed angle iron extended from bilges to the upper deck beam stringer on alternate frames, and vessels of 800 tons and upwards to have reversed angle iron extended on every frame from bilges to lower deck or hold beam stringer, if the vessel has two decks or tiers of beams, and to the height of middle deck beam stringer if the vessel has three decks or tiers of beams; the rivets for securing the reversed angle iron to the frames and floor plates to be in diameter equal to those specified in the table for the outside plating, and not to exceed eight times their own diameter apart.

Middle Line Keelson.

6. The middle line keelsons,* if of single plate, to be of the same thickness as the floor plates, and if standing above the floor plates to be well fitted and rivetted to the same, and a reversed angle iron to be fitted on each side, both on the top and the bottom, extending all fore and aft, the lower angle irons to be secured to the double reversed angle irons on the top of floors. If box keelsons be adopted, the plating to be of the thickness as per Table G, and in either case to be two-thirds of the depth of floor plates.

If intercostal middle line keelsons be adopted, they are to be of the same thickness as the floor plates, and rivetted to vertical angle irons on all floor plates at each end, the plates to extend from upper edge of keel to above the upper edge of floor plates, sufficiently high to be rivetted between the double angle irons extending all fore and aft, of the dimensions given in the Table G, and the said double angle irons of keelson are to be rivetted to double angle irons on top of all floor plates.

* In all cases the Keelsons, and *where practicable*, the Shelfpieces and Stringers, are to be carried fore and aft, without being cut off at the Bulkheads, the latter being made watertight around them; and where such parts of the ship are necessarily separated, they are to be efficiently connected, to the satisfaction of the Surveyor.

7. The bilge keelsons to be fitted and secured in an efficient manner, Bilge Keelsons. extending all fore and aft, and placed at lower turn of bilges, according to the form of the bottom. In ships of 1000 tons and upwards, an intercostal keelson to be fitted on each side, fore and aft as far as practicable, about midway between the middle line keelson and the bilge keelson, with double angle iron rivetted on the top of floor plates. All vessels of 500 tons and upwards to have fitted between the bilge keelsons and the hold beams, at the upper part of the turn of bilge, strong angle irons, as stringers, extending all fore and aft, rivetted back to back and to the reversed irons on the frames, the size of them not to be less than those used for the middle line keelson.

8. No plates to be less than nine feet in length, except the fore and after Plating. hoods, and all plates to be well fitted and secured to the ribs and each other, the butts to be closely fitted, and to be united by lining pieces or strips of not less than the same thickness as the plates, and of sufficient breadth for rivetting, as described hereafter. No butts of outside plating to be nearer each other than one space of frames, nor to be nearer to a scarp of keel than that distance.

The space between the outside plating and the frames, to have solid filling pieces closely fitted in one length, of the same breadth as the frames.*

9. In the outside plating, stringer plates upon beams, angle iron on stringer plates, and flat of deck of raised quarter-decks, a reduction of one-fifth from the thickness required by the Table G for such parts in the range of the upper deck in ships with two decks will be allowed. Reductions allowed in raised Quarter Decks, Poops, Forecastles &c.

In the outside plating, stringer plates upon beams, angle iron on stringer plates, and flat of deck of full poops and top gallant forecastles, a reduction of one-fourth from the thickness required by the Table G for such parts in the range of the upper deck in ships with two decks will be allowed, and for the beams of full poops and top gallant forecastles a reduction of one-fifth will be allowed. The united lengths of poop and forecastle not to exceed three-fifths of the entire length of the upper deck.

In the scantlings of beams, plating, flat of deck, stringer plates, and angle iron on stringers to upper (or spar deck) in vessels with three decks, viz., upper, middle, and lower deck, a reduction of one-sixth from the dimensions given for such parts in the range of upper deck in ships with two decks will be allowed.

10. For the spacing of beams the depth of hold is measured amidship from the top of the floor plates to the top of the upper deck beams in vessels with two decks, and to the top of the middle deck beams in vessels with three decks. Depth of Hold, for Space of Beams.

* It is recommended that in all cases the sheerstrake be an outside strake, so as to admit of the butt-straps, or lining-pieces, being extended in one piece, from the foreside of the frame next afore the butts to the aftside of the frame next abaft the butts, or to admit of doubling the sheerstrake where it may be required; also that all butt-straps, or lining-pieces to butts, be fitted with the fibre of the iron in the same direction as the fibre of the plating to which they are rivetted.

The beams to be of the dimensions as per Table G, and to be made of "bulb," or any other approved iron plates, with reversed angle iron rivetted to the plates, the beams to be well and efficiently connected or rivetted to the corresponding frames at the sides of the vessel, with bracket ends or knee plates of thickness equal to the beams, and in length, as per Table G, also to the stringer plates, the beams of each deck to be over each other, and pillared where practicable.

Upper deck beams in vessels with one or two tiers of beams, and the upper (or spar deck) and middle deck beams in vessels with three tiers of beams, to be fastened to alternate frames.

Vessels of 12 feet and under 13 feet depth of hold, or where the gross register tonnage exceeds 200 tons, shall be required to have as many hold beams as may be practicable or convenient, fastened to, at least, every eighth frame.

Vessels of 13 feet depth and under 15 feet, to have hold beams fastened to every fourth frame.

Vessels of 15 feet depth and under 18 feet, to have hold or lower deck beams fastened to every second and fourth frame, alternately.

Vessels of 18 feet depth and under 23 feet, to have hold or lower deck beams fastened to every alternate frame.

All vessels having two decks, and exceeding 23 feet in depth to the upper side of upper deck beams, and in vessels with three decks, viz., upper (or spar), middle, and lower deck, and exceeding 23 feet in depth to upper side of middle deck beams, such vessels to have orlop beams fastened to every sixth frame.

Where a deviation from the foregoing Rules as applying to beams takes place in way of engine-rooms or hatchways, or where no deck is intended to be laid, and the above named spaces would materially interfere with the stowage of cargo, and where partial or entire bulkheads with horizontal shelves and stringers between them, or larger beams are substituted for ordinary beams in wider spaces, a sketch with all particulars must be submitted, through the resident surveyor, for the Committee's consideration. The middle deck to be a perfect deck laid and caulked.

Rivets and Riveting.

11. The rivets to be of the best quality, and to be in diameter as per Table G; the rivet holes to be regularly and equally spaced and carefully punched opposite each other in the laps and lining pieces or strips, to be countersunk all through the outer plating; the rivets not to be nearer to the butts or edges of the plating, lining pieces to butts, or of any angle iron, than a space not less than their own diameter, and not to be further apart from

centre to centre than four times their diameter, or nearer than three times their diameter, and to be spaced through the frames and outside plating, and in reversed angle iron, a distance equal to eight times their diameter apart. When rivetted up they are completely to fill the holes, and their points or outer ends are to be round or convex, and not to be below the surface of the plating through which they are rivetted. In vessels intended for the 12 years' grade, of *700 tons and upwards*, all edges or horizontal joints of outside plating to be double rivetted: and in vessels of the 12 years' grade *under 700 tons*, and in *all vessels* of the 9 years' grade, all edges or horizontal joints of outside plating to be double rivetted from the keel to the height of upper part of bilges, all fore and aft. The stem, stern post, keel, edges of garboard strakes and sheer strakes, and butts of outside plating, and butts of floor plates, breasthooks, transoms, and plates of beams, also butts of keelsons, stringers, shelf-plates, and all other longitudinal ties, to be double rivetted in all vessels. The overlaps of plating, where double rivetting is required, not to be less in breadth than five times the diameter of the rivets; and where single rivetting is admitted, the overlaps to be not less in breadth than three times the diameter of the rivets. If double rivetting be adopted where single rivetting is allowed by the Rules, the diameter of the rivets may be reduced one-sixteenth of an inch below that prescribed by the Rules, provided that in no case the diameter be reduced below five-eighths of an inch. The butts and edges of outside plating to be truly fitted, carefully caulked, and made water-tight.

12. In addition to the engine room bulkheads of steamers, all vessels **Bulkheads.** to have two water-tight bulkheads, built at a reasonable distance from the ends, to extend from the keel, and outside plating to the upper deck in vessels with two decks, and to the middle deck in vessels with three decks (otherwise called "tonnage deck"); but it shall not be required to extend the aftermost bulkhead to this height if it be continued above the load water line, and be connected to a water-tight platform or deck of iron extending from its upper part entirely round the after part of the vessel, thus enclosing the lower after body in a water-tight tank. If a screw shaft passes through a bulkhead, it is to be made water-tight at the bulkhead. All plating of bulkheads to be of the thickness prescribed in Table G, and to be closely fitted between two frames or ribs at each side of the vessel, and strongly rivetted through them, or if attached only to one frame, then to have brackets or knee plates rivetted horizontally against the side plating of the vessel and to the bulkheads, foreside and aftside alternately, near the middle of the outside plates, to be strongly rivetted thereto. Lining pieces between

these frames and outside plating in way of bulkheads are to be plates extending in one piece from the foreside of the frame afore the bulkhead frames to the aftside of the frame abaft the bulkhead frames; also the bulkheads to be supported vertically by angle irons of the dimensions given in the Table G, which are not to exceed two feet six inches apart, the whole to be efficiently connected and rivetted together and to the corresponding floors, beams of the several decks, and the frames or ribs. The whole of the bulkheads to be caulked and made thoroughly water-tight.

Ceiling.

13. The wood ceiling or lining of all vessels from 100 to 3000 tons to be from $1\frac{1}{2}$ inches to 3 inches in thickness, in proportion to the tonnage, and to be so fastened to the reversed angle irons or frames that it may be easily removed for survey and painting.

Decks, Waterways, and Plank-sheers.

14. The waterways and plank-sheers, if of wood, not to be inferior in quality of material to that which is prescribed in Table A for vessels built of wood of the same grade. The flat of upper deck to be fastened by screw bolts put through from the upper side, and to have nuts at the under side of the angle iron of the beams; where the planks exceed six inches in width, two bolts in each plank in every beam, one of which may be a short screw bolt. The waterways to be fastened with screw bolts with nuts at under side of stringer plates.

Stringer plates and tie plates.

15. All vessels to have stringer plates upon the ends of each tier of beams, to be not less in breadth and thickness than the dimensions given in Table G, the said stringer plates to be fitted home and rivetted to the outside plating at all upper decks, and at the middle deck in vessels having three decks, with angle iron of the dimensions given in the Table; and the stringer plates of the middle deck of ships with three decks to have an additional angle iron extending all fore and aft inside of the frames, and rivetted to the reverse angle iron on the frames. All vessels to have upon each tier of beams a tie-plate* each side the hatchways of the dimensions given in Table G, extending all fore and aft throughout, and well rivetted to the upper sides of all the beams, deck hooks, and transoms. Also to have plates, where practicable, of the same dimensions, extending diagonally from side to side, rivetted to the upper side of beams and stringer plates.

Rudder.

16. The main piece of rudder to be made of the best hammered iron, and so arranged as to ship and unship, where practicable, without docking, and the main piece to be in size, according to the Table G.

* Upon hold beams where no deck is intended to be laid, or where such tie-plates would materially interrupt stowage of cargo, an angle iron, of the dimensions given in the Table G for "Angle Iron on Beam Stringers," will be admitted in lieu thereof, placed at the middle line, extending all fore and aft throughout where practicable, and well rivetted to all beams, deck hooks, and transoms.

17. Vessels intended for either the 12, 9, or 6 years' grade to be surveyed Surveys.
at least five times, in the following order, viz :—

On the several parts of the frame, when in place, and before the plating is wrought.

On the plating during the progress of rivetting.

When the beams are in and fastened, and before the decks are laid.

Again when the ship is complete, and before the plating is finally coated.

And lastly, after the ship is launched.

All vessels to be subject to occasional or annual survey when practicable, and every third year to be specially surveyed in dry dock or laid on blocks, with both surfaces of outside plating exposed ; and whenever the engines or the boilers of iron steam ships are taken out, the vessel shall be submitted to a particular and special survey.

CONTINUATION OF IRON SHIPS TO THE CHARACTER A.

18. If, on the termination of the period of original designation, or if at any subsequent period, not exceeding one-half the number of years assigned originally, or on restoration, an owner shall wish to have his ship remain or be replaced on the letter A, he is to send a written notice thereof to the Secretary, and the Committee shall then direct a special survey, as follows, to be held by not less than two competent persons, to be appointed by the Committee, one of them to be a surveyor the exclusive servant of the Society :

SURVEY.

The vessel to be placed on high blocks, in a dry dock, or upon ways, and proper stages to be made, so that the rivets and plates of keel, and flat of bottom, may be thoroughly examined ; the whole of the ceiling or lining inside to be entirely removed ; coal bunkers of steam vessels to be cleared, so as to expose the whole of the frames, stringers, hooks, floor plates, keelsons, engine and boiler bearers, ends of beams, water-tight bulkheads, rivets, and inner surface of the plating, to view ; the hold to be cleared ; all oxidation to be removed by being cut or beaten off the several parts above-named, also from the outside plating, rivets, keel, stem, sternpost, and rudder, so as to completely lay bare all the surfaces of iron ; the planksheers and waterways, if of wood, to be scraped bright : and when the vessel is so prepared, the Surveyors are to examine and report the condition and thickness of all the parts of iron above-named, also the condition of the planksheers, waterways, flat of decks and their fastenings ; and upon the owner consenting to remove and replace with proper materials, equal in substance

and quality to the original construction, such parts as may be found defective, or less than three-fourths of the required substance by Rule, such vessel, upon the repairs and efficiency being reported to the Committee, may be continued on the letter A for a term of years not exceeding one-half the number of years assigned originally, or on restoration, subject to occasional or annual survey when practicable. The period of continuation will, upon all occasions, commence from the time the ship may have gone off the letter A, without regard to the date when the survey for this purpose may be held.

RESTORATION OF IRON SHIPS TO THE CHARACTER A.

19. If, *at any age of a vessel*, an owner be desirous to have his ship restored, such restoration, on his application to the Committee, and consenting to the special survey hereinafter described, to be held by two Surveyors, one of whom shall be an exclusive servant of the Society, and performing the repairs thereby found requisite, will be granted for a period not exceeding two-thirds of the time originally assigned, the same to be calculated from the date of such repairs.

Survey and Requisites for Restoration.

The vessel to be placed on high blocks, in a dry dock, or upon ways, and proper stages to be made, so that the rivets and plates of keel, and flat of bottom, may be thoroughly examined; the whole of the ceiling or lining inside to be entirely removed; coal bunkers of steam vessels to be cleared, the boilers to be taken out and also the engines (unless it shall be shown by previous survey that the removal is unnecessary), so as to expose the whole of the frames, stringers, hooks, floor plates, keelsons, engine and boiler bearers, ends of beams, water-tight bulkheads, rivets, and inner surface of the plating, to view; the hold to be cleared; all oxidation to be removed by being cut or beaten off the several parts above-named, also from the outside plating, rivets, keel, stem, sternpost, and rudder, so as to completely lay bare all the surfaces of iron; the planksheers and waterways, if of wood, to be entirely removed, and also the flat of upper deck, except under special circumstances, to be sanctioned by the Committee in each case; and when the vessel is so prepared, the Surveyors are to examine and report the condition and thickness of all the parts of iron above-named, also the condition of the beams and their fastenings; and upon the owner consenting to remove such parts as may be found defective, or objected to, or less in thickness than hereinafter admitted for repairing such vessel, and replace them with proper materials equal in quality and substance to that required in the Table G for

the nine years' grade in those originally classed 12 A, and equal in quality and substance to that required in the Table G for the six years' grade in vessels originally classed 9 A or 6 A, such vessel, upon the repairs and efficiency being reported to the Committee, may be restored to the letter A, for a term of years not exceeding two-thirds the number of years assigned originally, subject to occasional survey.

Iron ships, which have been restored under the foregoing rule, shall be entitled to continuation thereon, subject to the same conditions of survey and examination as are prescribed for ships proposed to be continued at the expiration of the period first assigned to them; but in like manner, the term of such extended continuance to be limited to a period not exceeding one-half the number of years for which the ships may respectively have been restored, without reference to the period originally assigned to them.

20. On the expiration of the terms assigned to ships classed A, they will be liable to lapse (like ships built of wood).

21. One year will be added to the character of all ships of the A class built under a roof which shall project at each end beyond the length, and on each side beyond the breadth, a quantity equal to one-half the breadth of the vessel.

22. Vessels not surveyed while building, will be classed A from year to year only, but for a period not exceeding Six Years.

IRON SHIPS ALREADY CLASSED A 1.

Iron ships built prior to the promulgation of the Rules will be allowed to remain in the Register book classed A 1 from year to year, *subject to annual survey*, until the expiration of Six Years from their date of build, and then be examined to determine the period to which they may be entitled under the rules; and if, on such examination, it shall be found the ships are entitled to the 9 or 12 years' grade, it will be in the option of the owners either to adopt such period respectively, or continue the vessel A 1 from year to year, as above, until the expiration of the extended period; but if it shall be found that the term of years for which a vessel would have been entitled to remain on the A character has expired, she will be classed *Æ*, if entitled thereto, unless specially surveyed for continuation or for restoration.

The Rules for the building of Iron Ships having been now for some time before the public, and the principles upon which they are framed having

been found generally to work satisfactorily, and the Committee having very carefully revised the several regulations, especially in respect to the thickness of the plating and the extension of double rivetting, beg respectfully to urge upon the builders of iron ships the necessity of a close approximation to the Rules, and a conformity to the Table of Dimensions, so as to justify the Committee in granting the character A for the respective periods for which the ships are built.

By order of the Committee,

GEORGE B. SEYFANG,

Secretary.

No. 2, White Lion Court, Cornhill.

** London, 31st May, 1860.*

IRON SHIPS.—TABLE OF MEASUREMENTS.

3000	15X2	13	15X4X
5000	15X3	14	15X4X
6000	15X3	12	15X4X
10000	10X1	13	15X4X

been found generally to work satisfactorily, and the Committee having very carefully revised the several regulations, especially in respect to the thickness of the plating and the extension of double rivetting, beg respectfully to urge upon the builders of iron ships the necessity of a close approximation to the Rules, and a conformity to the Table of Dimensions, so as to justify the Committee in granting the character A for the respective periods for which the ships are built.

By order of the Committee,

GEORGE B. SEYFANG,

Secretary.

No. 2, White Lion Court, Cornhill.

** London, 31st May, 1860.*

TABLE G.

IRON SHIPS.—TABLE OF MINIMUM DIMENSIONS OF FRAMES, PLATING, RIVETS, KEELS, KEELSONS, STEMS, STERN POSTS, FLOOR PLATES, BEAMS, BULKHEADS, STRINGERS, &c.
All plates, and all beam and angle irons, used in ships intended for classification, are to be stamped on both sides with the name of the manufacturer and the place where made.

Gross Tonnage.	Keel, Stem, and Stern Post for all Grades.*	Distance of Frames or Ribs from Moulding edge to Moulding edge all fore and aft for all Grades.	FRAMES on RIBS. Dimensions of Angle Iron for all Grades.	Dimensions of Reversed Angle Iron on Frames and Bulkheads for all Grades.	THICKNESS OF PLATES.†									Thickness of Plates for Beams and Bulkheads for all Grades.		Dimensions of Angle Iron on Beam Stringers or Keelsons for all Grades.	RUDDER for all Grades.		Thickness of Wood Flat of Upper Deck.	Gross Tonnage.
					Garboard Strakes.			From the Garboard to the upper part of Bilge, and the Sheerstrakes.			From Bilge to Sheerstrakes, thickness of ½ Stringer Plates upon Beam Ends, Hooks, Crutches, Floor Plates, and Keelsons.									
					Years.			Years.			Years.									
					12	9	6	12	9	6	12	9	6	12	9		6	Beams.		
100	Inches. 5½×1½	inches. 18	inches. 616×2½2×2½2	inches. 516×2¼4×2¼4	inches. 816	inches. 716	inches. 616	inches. 716	inches. 616	inches. 516	inches. 616	inches. 516	inches. 516	inches. 416	inches. 616×2½2×2½2	inches. 2½2	inches. 2	inches. 2½2	100	
200	6×2	18	616×3×2½2	516×2¼4×2¼4	916	816	716	816	716	616	716	616	516	416	616×3×2½2	3	2	2½2	200	
300	6¼4×2¼4	18	616×3¼4×2¾4	516×2½2×2½2	1016	916	816	916	816	716	816	716	616	516	616×3½2×2¾4	3¼4	2¼4	3	300	
400	6½2×2½2	18	716×3½2×2¾4	616×2¾4×2½2	1016	916	816	916	816	716	816	716	616	516	616×4×3	3½2	2½2	3	400	
500	6¾4×2½2	18	716×3¾4×2¾4	616×3×2½2	1116	1016	916	1016	916	816	916	816	716	616	716×4¼4×3¼4	3¾4	2¾4	3½2	500	
600	7×2¾4	18	716×4×3	616×3×2¾4	1116	1016	916	1016	916	816	916	816	716	616	716×4½2×3½2	4¼4	2¾4	3½2	600	
700	7¼4×2¾4	18	816×4¼4×3	716×3×2¾4	1216	1116	1016	1116	1016	916	1016	916	816	616	816×4¾4×3¾4	4½2	3	3½2	700	
800	7½2×3	18	816×4½2×3	716×3×3	1216	1116	1016	1116	1016	916	1016	916	816	616	816×5×4	4½2	3	3½2	800	
900	8×3	18	816×4¾4×3	716×3¼4×3	1316	1216	1116	1216	1116	1016	1116	1016	916	716	916×5×4¼4	4¾4	3	3½2	900	
1000	8½2×3	18	916×5×3	816×3½2×3	1416	1216	1116	1216	1116	1016	1116	1016	916	716	916×5×4½2	5	3	4	1000	
1200	9×3	18	916×5×3½2	816×3½2×3	1516	1316	1216	1316	1216	1116	1116	1016	916	716	916×5½2×4½2	5	3¼4	4	1200	
1500	10×3	18	1016×5½2×3½2	916×4×3½2	1616	1416	1316	1416	1316	1216	1216	1116	1016	816	916×6×5	5½2	3½2	4	1500	
2000	12×3	18	1016×6×4	916×4½2×3½2	1716	1516	1416	1516	1416	1316	1316	1216	1116	816	1016×6½2×5½2	6	3¾4	4	2000	
2500	12×3¼4	18	1116×6¼4×4	1016×4½2×3½2	1716	1616	1516	1616	1516	1416	1416	1316	1216	816	1016×6½2×5½2	6½2	4	4	2500	
3000	12×3½2	18	1116×6½2×4	1016×4½2×3½2	1716	1616	1516	1616	1516	1416	1416	1316	1216	916	1016×6½2×5½2	6¾4	4½2	4	3000	

MEM.—The Scantlings given in the above Table are intended for Ships the length of which, measured from the fore part of the Stem to the after part of the Stern-post on the range of the Upper Deck, does not exceed seven times their extreme breadth, or ten times their depth of Hold, taken from the upper part of Floors to the top of the Upper Deck Beams. For Ships which are intended to exceed in length the above-named proportions, the Builders or Owners are to submit for the Committee's approval their plans, with full particulars for giving the Vessel sufficient additional strength longitudinally, either by doubling or thickening the Sheerstrake and increasing the size of Stringer Plates, or otherwise.

RIVETS.		$\frac{5}{8}$ of an Inch.			$\frac{3}{4}$ of an Inch.			$\frac{7}{8}$ of an Inch.			1 Inch.			Rivets to be $\frac{1}{4}$ of an inch larger in diameter in the stem, stern-post, and keel.
Diameter of Rivets required for														
Thickness of Plates - - -		$\frac{5}{16}$	$\frac{6}{16}$	$\frac{7}{16}$	$\frac{8}{16}$	$\frac{9}{16}$	$\frac{10}{16}$	$\frac{11}{16}$	$\frac{12}{16}$	$\frac{13}{16}$	$\frac{14}{16}$	$\frac{15}{16}$	$\frac{16}{16}$	

* When Hollow Plate Keels are adopted, their thickness should not be less than one and a half that of the Garboard Strake. For Keels of other Forms, see Sec. 2.

† No plates to be less than nine feet in length, except the fore and after hoods; and the Plating not to be reduced in thickness forward or aft, except in the sheerstrake and strake next below it, which may be reduced 1/8 of an inch in Vessels of 1000 Tons and under, and 1/16 of an inch in Vessels above 1000 Tons, for a distance not exceeding one quarter of the length of the Vessel from each end.

‡ All Beam Plates to be in depth one quarter of an inch for every foot in length of the Midship Beam; to have double Angle Iron upon upper edge, Siding & Moulding together of each to be not less than three-fourths the depth of Beam Plate, and to be in thickness 1/8 of an inch for every inch of the two sides of the Angle Iron.

§ Stringer Plates upon ends of Beams not to be less in breadth than three times the depth of Beams, and to be of the thickness given in the Table, the said Stringer Plates to be fitted home and rivetted to the outside plating at all Upper Decks, and at the Middle Deck in Vessels having three decks, with Angle Iron of the dimensions given in the Table above. The Plates ranging all fore and aft upon Beams on each side of Hatchways, or from side to side diagonally, to be half the width, and of the same thickness as the Stringer Plates upon ends of Beams. Each arm of Knee Plates not to be less in length than twice and half the depth of the Beams.

|| Depth of Floor Plates at the middle line not to be less than one inch for every foot of the Vessel's depth, measured amidship from the top of the Floor Plates to the top of the Upper or Spar Deck Beams, to extend beyond the Bilge Keelsons, and not to be less in depth at the Bilge Keelsons than the Moulding of the Frames.

The Rivets to be of the best quality, and to be in diameter as per Table; the rivet holes to be regularly and equally spaced and carefully punched opposite each other in the laps and lining pieces, or strips; to be countersunk all through the outer Plating, the rivets not to be nearer to the Butts or edges of the Plating, Lining Pieces to Butts, or any Angle Iron, than a space not less than their own diameter, and not to be further apart from centre to centre than four times their diameter, or nearer than three times their diameter, and to be spaced through the Frames and outside Plating, and in reversed Angle Iron, a distance equal to eight times their diameter apart. When rivetted up, they are completely to fill the holes, and their points, or outer ends, are to be round or convex, and not to be below the surface of the Plating through which they are rivetted. In vessels intended for the 12 years' grade, of 700 tons and upwards, all edges or horizontal joints of outside plating to be double rivetted; and in vessels of the 12 years' grade under 700 tons and in all vessels of the 9 years' grade, all edges or horizontal joints of outside plating to be double rivetted from the keel to the height of upper part of bilges, all fore and aft. The Stem, Stern Post, Keel, Edges of Garboard Strakes and Sheerstrakes, and Butts of outside Plating, and Butts of Floor Plates, Breasthooks, Transoms, and Plates of Beams; also butts of Keelsons, Stringers, Shelf Plates, and all other longitudinal ties, to be double rivetted in all Vessels. The overlaps of Plating where double rivetting is required, to be not less in breadth than five times the diameter of the rivets, and where single rivetting is admitted, the overlaps to be not less in breadth than three times the diameter of the rivets. If double rivetting be adopted where single rivetting is allowed by the Rules, the diameter of the rivets may be reduced 1/8 of an inch below that prescribed by the Rules, provided that in no case the diameter be reduced below 5/8 of an inch.

MEM.—Ships built under survey, in which the thickness of the plating is equal to the requirements of the Rules, but which, from partial deficiencies, may not appear to be in all respects entitled to the full terms of years contemplated by the above Table, will have one year, at the discretion of the Committee, abated from the period to which they would otherwise be entitled.

No. 1.—A TABLE exhibiting the different Descriptions of TIMBER, of good to the several Terms of Years appointed

PARTS OF THE FRAME OF A VESSEL.	TWELVE YEARS.	TEN YEARS.	NINE YEARS.	EIGHT YEARS.
FLOORS	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture, Cuba Sabicu, Pencil Cedar, Adriatic, Spanish and French Oak.	The same as in the preceding Class, and admit †Red Cedar, Angelly and Venatica Other Continental White Oak Spanish Chesnut, Stringy Bark and Blue Gum.	The same as in the preceding Class, and admit North American White Oak American Sweet Chesnut.
1st FUTTOCKS	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture, Cuba Sabicu, Pencil Cedar, Adriatic, Spanish, and French Oak.	The same as in the preceding Class, and admit †Red Cedar, Angelly and Venatica Other Continental White Oak Spanish Chesnut, Stringy Bark and Blue Gum.	The same as in the preceding Class, and admit †North American White Oak American Sweet Chesnut.
2d FUTTOCKS..	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding Class, and admit Adriatic, Spanish, & French Oak †Red Cedar, Angelly and Venatica.	The same as in the preceding Class.
3d FUTTOCKS.. and TOP TIMBERS	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding Class, and admit Adriatic, Spanish, & French Oak †Red Cedar, Angelly and Venatica.	The same as in the preceding Class.
MAIN and RIDER KEELSONS....	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture—Cuba Sabicu Pencil & Red Cedar Angelly & Venatica Adriatic, Spanish, & French Oak.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut, Stringy Bark, Blue Gum and Pitch Pine.	The same as in the preceding Class, and admit North American White Oak American Sweet Chesnut Larch Hackmatack Tamarac Juniper.
STEM	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding Class, and admit Adriatic, Spanish, & French Oak †Red Cedar, Angelly and Venatica.	The same as in the preceding Class.
and STERN POSTS	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding class, and admit Adriatic, Spanish, & French Oak †Red Cedar, Angelly and Venatica.	The same as in the preceding Class.
TRANSOMS.... KNIGHTHEADS HAWSE TIM- BERS..... APRON and DEADWOOD ..	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding class, and admit Adriatic, Spanish, & French Oak †Red Cedar, Angelly and Venatica.	The same as in the preceding Class.
BEAMS	English, African, and Live Oak—East-India Teak—Morung Saul—Greenheart—Morra—Iron Bark—Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding Class, and admit Adriatic, Spanish, & French Oak Red Cedar, Angelly and Venatica.	The same as in the preceding Class.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut, Stringy Bark, Blue Gum and Pitch Pine.
and HOOKS	English, African, and Live Oak—East-India Teak—Morung Saul—Greenheart—Morra—Iron Bark—Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding class, and admit Adriatic, Spanish, & French Oak Red Cedar, Angelly and Venatica.	The same as in the preceding Class.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut, Stringy Bark, Blue Gum and Pitch Pine.
KNEES	English, African, and Live Oak—East-India Teak—Morung Saul—Greenheart—Morra—Iron Bark—Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding class, and admit Adriatic, Spanish, & French Oak Red Cedar, Angelly and Venatica.	The same as in the preceding Class.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut, Stringy Bark, Blue Gum and Pitch Pine.

* This Table applies to the Deadwood so far as regards the material to be used from the height of two feet above the rabbet of the keel.
† Live Oak and Red Cedar admitted alternately in timbers of the frame for 10 A.
‡ If the First Futtocks run up above the Light Watermark, the use of Foreign White Oak is allowed for the 7 years' grade only.

MEM.—The word "English" includes Timber the growth of the United Kingdom.

Quality, to be used in the TIMBERING of SHIPS, as the same will be applicable for Ships to remain on the Character A.

SEVEN YEARS.	SIX YEARS.	FIVE YEARS.	FOUR YEARS.	PARTS OF THE FRAME OF A VESSEL.
The same as in the preceding Class, and admit Larch, Hackmatack, Tamarac, Juniper, Pitch Pine, Second-hand English or African Oak, or East-India Teak English Ash.	The same as in the preceding Class, and admit *Cowdie *American Rock Elm.	The same as in the preceding Class, and admit Baltic & Amer. Red Pine Foreign Ash Europ. & Amer. Grey Elm *Black Birch Spruce Fir *English Beech.	The same as in the preceding Class, and admit Hemlock.	FLOORS.
The same as in the preceding Class, and admit Larch—Hackmatack Tamarac—Juniper Pitch Pine Second-hand English or African Oak, or East-India Teak.	The same as in the preceding Class, and admit Cowdie English Ash American Rock Elm.	The same as in the preceding Class, and admit Baltic & Amer. Red Pine Foreign Ash European and American Grey Elm *Black Birch *Spruce Fir.	The same as in the preceding Class, and admit English Beech Hemlock.	
The same as in the preceding Class, and admit Other Continental White Oak, Spanish Chesnut Stringy Bark, Blue Gum North Amer. White Oak Amer. Sweet Chesnut Larch—Hackmatack Tamarac—Juniper Pitch Pine.	The same as in the preceding Class, and admit Second-hand English or African Oak, or East-India Teak Cowdie.	The same as in the preceding Class, and admit Baltic and American Red Pine English Ash American Rock Elm.	The same as in the preceding Class, and admit Foreign Ash European and American Grey Elm Black Birch Spruce Fir Hemlock.	1st FUTTOCKS.
The same as in the preceding Class, and admit Other Continental White Oak, Span. Ches., Stringy Bark, Blue Gum, N. Amer. White Oak, Amer. Sweet Chesnut, Larch, Hackmatack, Tamarac, Juniper Pitch Pine, Cowdie Baltic & Amer. Red Pine.	The same as in the preceding Class, and admit Second-hand English or African Oak, or East-India Teak.	The same as in the preceding Class, and admit English Ash American Rock Elm.	The same as in the preceding Class, and admit Foreign Ash European and American Grey Elm Black Birch Spruce Fir Yellow Pine. Hemlock.	2d FUTTOCKS.
The same as in the preceding Class, and admit Cowdie Baltic and American Red Pine.	The same as in the preceding Class, and admit Second-hand English or African Oak, or East-India Teak American Rock Elm.	The same as in the preceding Class, and admit English Ash Foreign Ash.	The same as in the preceding Class, and admit European and American Grey Elm Black Birch Spruce Fir English Beech Yellow Pine.	3d FUTTOCKS and TOP TIMBERS.
The same as in the preceding Class, and admit Other Continental W. Oak Span. Ches., Stringy Bark, Blue Gum, N. Amer. W. Oak, Amer. Sweet Ches. Larch, Hackmatack, Tamarac, Juniper, P. Pine.	The same as in the preceding Class, and admit Second-hand English or African Oak, or East-India Teak Cowdie.	The same as in the preceding Class, and admit Baltic and American Red Pine American Rock Elm.	The same as in the preceding Class, and admit English Ash—Foreign Ash European and American Grey Elm Black Birch Spruce Fir Yellow Pine.	MAIN and RIDER KEELSONS.
The same as in the preceding Class, and admit Other Continental White Oak, Spanish Chesnut, Stringy Bark, Blue Gum N. Amer. W. Oak, Amer. Sweet Chesnut, Larch Hackmatack, Tamarac Juniper, Pitch Pine.	The same as in the preceding Class, and admit Second-hand English or African Oak, or East-India Teak Cowdie.	The same as in the preceding Class, and admit Baltic and American Red Pine American Rock Elm.	The same as in the preceding Class, and admit English Ash Foreign Ash European and American Grey Elm Black Birch Spruce Fir Yellow Pine.	
The same as in the preceding Class, and admit North Amer. White Oak Amer. Sweet Chesnut Larch—Hackmatack Tamarac—Juniper Cowdie Baltic & Amer. Red Pine.	The same as in the preceding Class, and admit Second-hand English or African Oak, or East-India Teak.	The same as in the preceding Class, and admit English Ash Foreign Ash American Rock Elm European and American Grey Elm.	The same as in the preceding Class, and admit Black Birch Spruce Fir Yellow Pine. Hemlock.	STEM and STERN POST.
The same as in the preceding Class, and admit North Amer. White Oak Amer. Sweet Chesnut Larch—Hackmatack Tamarac—Juniper Cowdie Baltic & Amer. Red Pine Spruce Fir.	The same as in the preceding Class, and admit Second-hand English or African Oak, or East-India Teak.	The same as in the preceding Class, and admit English Ash Foreign Ash American Rock Elm European and American Grey Elm.	The same as in the preceding Class, and admit Black Birch Spruce Fir Yellow Pine. Hemlock.	TRANSOMS KNIGHTHEADS HAWSE TIMBERS APRON and *DEADWOOD.
				BEAMS and HOOKS
				KNEES.

* Black Birch, Beech, American Rock Elm, and Cowdie allowed for FLOORS in Midships, to an extent not exceeding one-half the entire length of the keel in ships of the Seven Years' Grade.

** Black Birch and Spruce allowed for First Futtocks amidships, to the same extent in Ships of the Six Years' Grade.

White Cedar allowed for Third Futtocks and Toppimbars in ships of the Seven Years' Grade.

No. 2.—A TABLE exhibiting the different Descriptions of TIMBER, of good applicable to the several Terms of Years appointed

PARTS OF THE OUTSIDE OF A VESSEL.	TWELVE YEARS.	TEN YEARS.	NINE YEARS.	EIGHT YEARS.
KEEL to the 1st FUTTOCK HEADS.....	English, African, and Live Oak, East-India Teak, Morung Saul, Greenheart, Morra, Iron Bark, Mahogany of hard texture, Cuba Sabicu, Pencil Cedar, Adriatic, Spanish, and French Oak, Red Cedar, Angelly and Venatica, other Continental White Oak, Spanish Chesnut, Stringy Bark and Blue Gum, North American White Oak, American Sweet Chesnut, Larch, Hackmatack, Tamarac, Juniper, Pitch Pine, §American Rock Elm, §European and American Grey Elm, §English Beech.	The same as in the preceding Class, and admit Cowdie English Ash Foreign Ash Black Birch.	The same as in the preceding Class, and admit Baltic and American Red Pine.	The same as in the preceding Class.
1st FUTTOCK HEADS..... to LIGHT WATER MARK	English, African, and Live Oak, East-India Teak, Morung Saul, Greenheart, Morra, Iron Bark, Mahogany of hard texture, Cuba Sabicu, Pencil Cedar, Adriatic, Spanish, and French Oak, Red Cedar, Angelly and Venatica, other Continental White Oak, Spanish Chesnut, Stringy Bark and Blue Gum, Pitch Pine.	The same as in the preceding Class, and admit North American White Oak American Sweet Chesnut Larch Hackmatack Tamarac Juniper.	The same as in the preceding Class, and admit Cowdie Baltic and American Red Pine.	The same as in the preceding Class, and admit American Rock Elm European and American Grey Elm English Beech.
LIGHT WATER MARK to WALES	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark Red Cedar Angelly and Venatica.	The same as in the preceding Class, and admit Mahogany of hard texture—Cuba Sabicu Pencil Cedar Adriatic, Spanish, and French Oak.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut Stringy Bark, Blue Gum and Pitch Pine.	The same as in the preceding Class, and admit N. American White Oak Amer. Sweet Chesnut Larch—Hackmatack Tamarac Juniper Cowdie Baltic & Amer. Red Pine.
WALES BLACKSTRAKES TOPSIDES..... and SHEERSTRAKES	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture Cuba Sabicu Pencil Cedar Red Cedar Angelly and Venatica.	The same as in the preceding Class, and admit Adriatic, Spanish, and French Oak Pitch Pine.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut Stringy Bark, and Blue Gum
UPPER DECK WATERWAYS SPIRKETTING and PLANKSHEERS.	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra—Iron Bark.	The same as in the preceding Class, and admit Adriatic, Spanish, and French Oak Red Cedar Angelly and Venatica Larch—Hackmatack Tamarac—Cuba Sabicu Juniper Pitch Pine—Pencil Cedar Cowdie Baltic & Amer. Red Pine. Mahogany of hard texture.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut Stringy Bark and Blue Gum.	The same as in the preceding Class.

§ The use of Elm and Beech, in Ships above the EIGHT YEARS' grade, to be restricted to a height from the lower part of the main Keel, of one-third of the internal depth of the Ship measured, in *midships*, from the top of the Limber Strake to the top of the Upper Deck Beams.

Quality, to be used in the OUTSIDE PLANKING of SHIPS, as the same will be for Ships to remain on the Character A.

SEVEN YEARS.	SIX YEARS.	FIVE YEARS.	FOUR YEARS.	PARTS OF THE OUTSIDE OF A VESSEL.
The same as in the preceding Class.	The same as in the preceding Class, and admit Spruce Fir Yellow Pine.	The same as in the preceding Class.	The same as in the preceding Class, and admit Hemlock.	KEEL to the 1st FUTTOCK HEADS.
The same as in the preceding Class, and admit English Ash Foreign Ash Black Birch.	The same as in the preceding Class, and admit Spruce Fir	The same as in the preceding Class, and admit Yellow Pine.	The same as in the preceding Class, and admit Hemlock.	1st FUTTOCK HEADS to LIGHT WATER MARK.
The same as in the preceding Class.	The same as in the preceding Class, and admit American Rock Elm.	The same as in the preceding Class, and admit European and American Grey Elm Yellow Pine. Spruce Fir	The same as in the preceding Class, and admit English Ash Foreign Ash Black Birch English Beech. Hemlock.	LIGHT WATER MARK to WALES.
The same as in the preceding Class, and admit North Amer. White Oak American Sweet Chesnut Larch -Hackmatack Tamarac Juniper Cowlie Baltic & Amer. Red Pine.	The same as in the preceding Class.	The same as in the preceding Class, and admit American Rock Elm Yellow Pine.	The same as in the preceding Class, and admit European and American Grey Elm Black Birch Spruce Fir Hemlock.	WALES BLACKSTRAKES TOPSIDES and SHEERSTRAKES
The same as in the preceding Class, and admit Oak American Sweet Chesnut.	The same as in the preceding Class.	The same as in the preceding Class, and admit Second-hand English or African Oak East-India Teak American Rock Elm ††Yellow Pine.	The same as in the preceding Class, and admit European and American Grey Elm Black Birch Spruce Fir Hemlock.	UPPER DECK WATERWAYS SPIRKETTING and PLANKSHEERS.

†† Yellow Pine allowed for Waterways of Upper Deck in Ships of the SEVEN YEARS' grade, if properly fastened, as prescribed in Table B, and provided the Beams are well secured, independently of the Waterways.

MEM.—The word "English," includes Timber the growth of the United Kingdom.

No. 3.—A TABLE exhibiting the different Descriptions of TIMBER, of good applicable to the several Terms of Years

INSIDE PLA	TWELVE YEARS.	TEN YEARS.	NINE YEARS.	EIGHT YEARS.
LIMBER STRAKES and BILGE STRAKES.	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark Mahogany of hard texture Cuba Sabicu Pencil Cedar Adriatic, Spanish, and French Oak Red Cedar Angelly and Venatica.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut Stringy Bark and Blue Gum.	The same as in the preceding Class, and admit North American White Oak American Sweet Chesnut Pitch Pine.	The same as in the preceding Class.
CEILING, LOWER HOLD, and BETWEEN DECKS.	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark Mahogany of hard texture Cuba Sabicu Pencil Cedar Adriatic, Spanish, and French Oak Red Cedar Angelly and Venatica.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut Stringy Bark and Blue Gum.	The same as in the preceding Class, and admit North American White Oak American Sweet Chesnut Pitch Pine.	The same as in the preceding Class, and admit Larch Hackmatack Tamarac Juniper Cowdie Baltic and American Red Pine.
SHELF PIECES CLAMPS and LOWER DECK WATERWAY.	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark Mahogany of hard texture Cuba Sabicu Pencil Cedar Adriatic, Spanish, and French Oak Red Cedar Angelly and Venatica.	The same as in the preceding Class, and admit Other Continental White Oak Spanish Chesnut Stringy Bark and Blue Gum.	The same as in the preceding Class, and admit North American White Oak American Sweet Chesnut Pitch Pine.	The same as in the preceding Class, and admit Larch Hackmatack Tamarac Juniper Cowdie Baltic and American Red Pine.
RUDDER and WINDLASS MAIN PIECES.	English } Oak African } Live } East-India Teak Morung Saul Greenheart Morra Iron Bark.	The same as in the preceding Class, and admit Mahogany of hard texture Cuba Sabicu Pencil Cedar.	The same as in the preceding Class, and admit Adriatic, Spanish, and French Oak.	The same as in the preceding Class.

|| The materials marked thus || under the head of " Rudders and Windlass " allowed in ships of 300 Tons and under only.

Quality, to be used in the **INSIDE PLANKING** of **SHIPS**, as the same will be for Ships to remain on the Character A.

SEVEN YEARS.	SIX YEARS.	FIVE YEARS.	FOUR YEARS.	INSIDE PLANK.
The same as in the preceding Class, and admit Larch Hackmatack Tamarac Juniper Cowdie Baltic and American Red Pine American Rock Elm.	The same as in the preceding Class.	The same as in the preceding Class, and admit Second-hand English or African Oak or East-India Teak English Ash Foreign Ash European and American Grey Elm Black Birch Spruce Fir English Beech Yellow Pine.	The same as in the preceding Class, and admit Hemlock.	LIMBER STRAKES and BILGE STRAKES.
The same as in the preceding Class.	The same as in the preceding Class, and admit American Rock Elm.	The same as in the preceding Class, and admit Second-hand English or African Oak or East-India Teak English Ash Foreign Ash European and American Grey Elm Black Birch Spruce Fir English Beech Yellow Pine.	The same as in the preceding Class, and admit Hemlock.	CEILING, LOWER HOLD, and BETWEEN DECKS.
The same as in the preceding Class.	The same as in the preceding Class, and admit American Rock Elm.	The same as in the preceding Class, and admit Second-hand English or African Oak or Teak and Yellow Pine. Spruce Fir	The same as in the preceding Class, and admit English Ash Foreign Ash European and American Grey Elm Black Birch English Beech. Hemlock.	SHELF PIECES CLAMPS and LOWER DECK WATERWAY.
The same as in the preceding Class, and admit Other Continental White Oak, Spanish Chestnut Stringy Bark, Blue Gum North American White Oak and American Sweet Chestnut Larch, Hackmatack Tamarac, Juniper, Pitch Pine.	The same as in the preceding Class.	The same as in the preceding Classes, and admit Second-hand English or African Oak or East-India Teak Baltic and American Red Pine. English Ash.	The same as in the preceding Classes, and admit American Rock Elm Black Birch Spruce Fir English Beech.	RUDDER and WINDLASS MAIN PIECES.

MEM.—The word "English" includes Timber the growth of the United Kingdom.

FORM OF THE REPORT OF ORIGINAL SURVEY.

No. — Survey held at — Date — 18 — on the — Master —
 Tonnage { Old — Built at — When built — Launched —
 { New —
 By whom built — Owners — Port belonging to — Destined Voyage —
 If Surveyed while building, Afloat, or in Dry Dock —

Length aloft	Feet. Inches.		Extreme Breadth outside	Feet. Inches.		Depth of Hold	Feet. Inches.	

SCANTLINGS OF TIMBER.

THICKNESS OF PLANK.

	IN SHIP.		REQUIRED PER RULE.		OUTSIDE.		INSIDE.	
	Sided.	Moulded.	Sided.	Moulded.	Inches.	In Ship.	Inches.	In Ship.
Timber and Space					Garboard			
Floors					Strakes.....			Limber Strakes
1st Foothooks					Garboard to			
2d Ditto	Middle.	Ends.	Middle.	Ends.	Bilge			Bilge Planks
3d Ditto					Bilge Planks			
Top Timbers					Bilge to Wales			Ceiling in Flat.....
Deck Beams No. { Average					Wales			Ditto Bilge to Clamp
Deck Beams, length amid-					Topsides			
ships					Sheerstrakes			Hold Beam Clamps..
Hold Beams No. { Average					Planksheers			Deck Beam Ditto ...
Hold Beams, length amid-					Waterways—			
ships					Upper Deck			Ceiling, 'twixt Decks
Keel					Lower Deck			
Scarp of Ditto.....					Do. faying sur-			Hold Beam Shelves ..
Keelsons.....					face against			
Scarp of Ditto					Timbers ...			Deck Beam ditto.....
					Upper Deck			

SIZE OF BOLTS IN FASTENINGS, DISTINGUISHING WHETHER COPPER, YELLOW METAL, OR IRON; ALSO OF TREENAILS.

	Copper or Y.M. in Ship.	Iron in Ship.	Inches required per Rule		Copper or Y.M. in Ship.	Iron in Ship.	Inches required per Rule
Heel-Knee and Deadwood abaft				Thickstuff over Double Floors			
Scarps of Keel, No.				Butt End Bolts			
Keelson Bolts through Keel at each Floor				Pintles of the Rudder			
Bolts through Heels of Timbers against Deadwood...				Hold Beam Bolts in { Waterway			
Transoms and throats of Hooks.....				{ Knees			
Arms of Hooks				{ Shelf or Clamp			
Through Bilge and Limber Strakes				Deck Beam Bolts in { Waterway			
				{ Knees			
				{ Shelf or Clamp			
				Nails or Bolts in Flat of Deck			
				Treenails.....Inches			

TIMBERING.—The Space between the Floor Timbers and Lower Foothooks is — Inches.

The Space between the Top Timbers is — Inches.

The Floors consist of — The First Foothooks of —

The Second Foothooks of — The Third Foothooks and Top Timbers of —

The Shifts of the first and second Foothooks are not less than —

[N.B. When less than prescribed by the Rule, state how many.]

The rest of the Shifts of the Frame are —

The Frame is — squared from the first Foothook Heads upwards, and — free from sap, and from thence downwards the Frame is —

The alternate Frames are — bolted together to the Gunwale.

[N.B. If not, state how bolted.]

The Butts of the Timbers are — close together; their thickness not less than — of the entire moulding at that place.

The frame is — chocked with — Butt at each end of the chock. The Main piece of Rudder is — Of Windlass is —

The Keel is — The Main Keelson is — and — free from all defects.
 The Stem and Stern Post of — The Transoms, Knight Heads, Hawse Timbers,
 and Aprons, of — Deadwood, of — and are — free from all defects.
 The Deck and Hold Beams of — The Breasthooks of — The Knees of —

PLANKING OUTSIDE.—From the Keel to the Height defined in Note to Table A, or to the

First Foothook Heads the Plank is —

From the above-named height to the Light Water Mark —

From the Light Water Mark to the Wales —

The Wales and Blackstrakes are — The Topsides and Sheerstrakes —

The Spirketting and Planksheers — The Waterways { Upper Deck —
 Lower Deck —

The Decks — State of —

The Shifts of the Planking are not less than — feet — inches. [N.B.—If less than pre-
 scribed by the Rule, state whether general or partial, and if partial, in what part of the Ship.]

The Planking is wrought — between, and without step-butting.

PLANKING INSIDE.—The Limber-strakes and Bilge-strakes are —

The Ceiling, Lower Hold, and between Decks — Shelf Pieces and Clamps —

FASTENINGS.—To Hold Beams —

Deck Beams —

Number of Breasthooks — Pointers — Crutches —

Butts End Bolts are of — in the Bottom, and — Bolt in each Butt End through
 and clenched.

Bilge and Limber Strakes — bolted through and clenched. Treenails of — How
 made —

Thickstuff over Double Floors — bolted through and clenched. General Quality
 of Workmanship —

We certify that the above is a correct description of the several particulars therein given.

Builder's Signature — Surveyor's Signature —

Her Masts, Yards, &c. are in — condition, and sufficient in size and length.

She has SAILS.

CABLES, &c.

ANCHORS,

No.		Fathoms.	Inches.	and their Weights.	No.	Weight.
	Fore Sails,	Chain		Bower		
	Fore Top Sails,	Hempen Stream Cable		Stream		
	Fore Topmast Stay Sails,	Hawser		Kedge.....		
	Main Sails,	Towlines.....				
	Main Top Sails,	Warp				
	and	All of — quality.				

Her Standing and Running Rigging — sufficient in size and — in quality.

She has — Long Boat and — The present state of the Windlass is —

Capstan — Rudder — Pumps —

General Remarks and Statement and Date of Repairs, if any.

Dates of Surveys { 1st. When the Frame is completed —
 held while building, { 2nd. When the Beams are put in, &c. —
 as per Section 35. { 3rd. When completed, and before the plank be painted or payed —
 Present condition of Caulking of Bottom, — Deck, — and Waterways —
 If Sheathed, Doubled, Felted, or Coppered — When last done —

I am of opinion this Vessel should be classed —

The Amount of the Fee £ : : is received by me,

Special £ : :

Certificate £ : :

Committee's Minute — 18—

Character assigned —

IRON SHIPS.

No — Survey held at — Date — 18 — on the — Master —
 Tonnage—Gross — Engine Room — Register — Built at —
 When built — By whom built — Owners — Port belonging to —
 Destined Voyage — If Surveyed Afloat or in Dry Dock —

Length aloft	Extreme Breadth	Depth from top of Upper Deck Beam to top of Floor	Feet, Inches.		Power of Engines	Horse. No.
Distance of Frames or Ribs from moulding edge to moulding edge, all fore and aft	Inches in Ship.		Inches Required per Rule.		In Ship.	Required per Rule.
Floors, Size of Angle Iron and No. at bottom of Floor plate depth and thickness of Floor Plate at mid line Do. at bilge keelson Size of Reversed Angle Iron, and No. at top of Floor Plate	In Ship.		Required per Rule.		Inches Inches 16ths	Inches Inches 16ths
Frames, Size of Angle Iron, single or double	In Ship.		Required per Rule.		Inches Inches 16ths	Inches Inches 16ths
Beams, Deck (No.) double Angle Iron or Bulb Iron with double Angle Iron on top	In Ship.		Required per Rule.		Inches Inches 16ths	Inches Inches 16ths
Keelson, wood, sided and moulded, Iron, size of Plate, if Box, give sketch and dimensions	In Ship.		Required per Rule.		Inches Inches 16ths	Inches Inches 16ths

- Transoms, material ——— or, if none, in what manner compensated for.
- Knight-heads „ } are they free from defects?
- Hawse Timbers „ }
- Bulkheads, No. ——— Thickness of ———
- „ how secured to the sides of the ship ———
- „ size of vertical angle iron and their distance apart ———
- The Frames or Ribs extend in one length from ——— to ——— rivetted through plates with — in. rivets, about ——— apart.
- The reverse angle irons on the floors extend in one length across the middle line from ——— to ———
- „ „ on the frames „ „ „ from ——— to ———
- Keelson, how are the various lengths of plates or angle irons connected?
- Plates, Garboard, double or single rivetted to keel and at upper edge, with rivets — ins. diameter, averaging — in. from centre to centre of rivet.
- „ edges from Garboards to upper part of bilge, worked carvel with a lining piece — in. thick, or clencher, double or single rivetted; rivets — in. diameter, averaging — ins. from centre to centre of rivets.
- „ butts from keel to turn of bilge, worked carvel with a lining piece ——— thick double or single rivetted; rivets — in. diameter, averaging — ins. from centre to centre of rivets. Do the lining pieces lap over and rivet through the lands of the strake below? ———
- „ edges from bilge to planksheer, worked carvel with a lining piece ——— thick, double or single rivetted; rivets — in. diameter, averaging — ins. from centre to centre of rivets. Do the lining pieces lap over and rivet through the lands of the strake below?
- „ butts from bilge to planksheers, worked carvel with a lining piece ——— thick, or clencher, double or single rivetted; rivets — in. diameter, averaging — ins. from centre to centre of rivets. Breadth of laps in double rivetting ——— Breadth of laps in single rivetting ———.
- Planksheer, how secured to the plating of the sides { Explain by a sketch, }
- Waterway „ „ planksheer and to the beams { if necessary. }
- Side trussing ——— breadth and thickness of plates ——— how secured? ———
- Deck trussing ——— „ „ „ „ „ „ ———
- Deck Beams, how secured to the side ———
- Hold or Lower Deck „ ———
- Paddle „ „ „ ———
- No. of breasthooks ——— crutches ——— how are pointers compensated?
- What description of iron is used for the angle iron and plate iron in the vessel?
- Builder's Signature.

WORKMANSHIP.—Are the lands or laps of the clench work in all cases in breadth at least five times the diameter of the rivets in double rivetted edges and butts, and at least three times the diameter of the rivets where single rivetting is admitted? ———

Do the edges of the carvel work and of the butts lay close together throughout their length without requiring any making good of deficiencies? ———

Do the fillings between the ribs and plates fill in solid with single pieces, or are they in short lengths of various thicknesses? ———

Do the holes for rivetting plate to frames, lining pieces, or plate to plate, &c., conform with to each other? ——— and are the rivet holes well and sufficiently counter sunk in the outer plate? ———

Are there any rivets which either break into or have been put through the seams or butts of the plating? ———

Her Masts, Yards, &c., are in ——— condition, and sufficient in size and length.

She has SAILS.		CABLES, &c.		ANCHORS, and their weights	
No.			Fathoms. Inches.		No. Weight.
	Fore Sails,	Chain		Bower,.....	
	Fore Top Sails,	Hempen Stream Cable		Stream,	
	Fore Topmast Stay Sails,	Hawser		Kedge,.....	
	Main Sails,	Towlines.....			
	Main Top Sails	Warp			
	and	All of ——— quality.			

Her Standing and Running Rigging ——— sufficient in size, and ——— in quality

She has ——— Long Boat and ———

The present state of the Windlass is ——— Capstan ——— and Rudder ———

Pumps ———

GENERAL REMARKS.

Statement and date of repairs; extent of corrosion (if any) both internally and externally; and condition of rivets.

Dates of Surveys held while building, as per Section 17.	{	1st. On the several parts of the frame, when in place, and before the plating was wrought ———
		2nd. On the plating during the progress of rivetting ———
		3rd. When the beams were in and fastened, and before the decks were laid ———
		4th. When the ship was complete, and before the plating was finally coated ———
		5th. After the ship was launched ———

In what manner are the surfaces preserved from oxidation?

I am of opinion this vessel should be classed ———

The amount of the Fee .. £ : : is received by me,

Special £ : :

Certificate (if required) £ : :

Committee's Minute ——— 18—

Character assigned ———

No. 6.

FORM OF REPORT OF ANNUAL SURVEY

No. — Survey held at — Date — 18 — on the —
 Master — Tonnage — Built at — When built — By whom
 built — Owners — Port belonging to — Destined
 Voyage — If Surveyed Afloat or in Dry Dock —

Last Survey, No. — Port of — Classed —

The present condition of the

Decks	Plank (Bottom) & Counter.	Windlass and Capstan
Waterways	Treenails.....	Pumps.....
Comings	Breasthooks and Stenson...	Boats
Upper Deck Beams and	Transoms, Pointers, and	Masts, Yards, &c.
Fastenings	Crutches.....	Sails.....
Lower Deck Beams and	Timbers of the Frame	Anchor, No. of.....
Fastenings	Keelsons.....	Cables
Planksheers	Clamps and Shelves.....	Hawsers and Warps
Sheerstrakes	Ceiling.....	Standing & Running Rigging
Topsides	Rudder	Caulking of Bottom, Deck,
Wales	Copper, when put on	and Waterways

General Observations and Opinion,

Committee's Minute — 18

Character assigned —

Certificate (if required)

No. 7.

FORM OF CERTIFICATE OF CHARACTER.

Lloyd's Register of British and Foreign Shipping.

ESTABLISHED 1834.

No. —



London,

18

No. 2, White Lion Court, Cornhill.

These are to Certify, That the — of —
 — Master, — Tons, bound to —, has been
 Surveyed at — by the Surveyors to this Society, and reported to be, on the

and that she has been **CLASSED** and entered in the **REGISTER BOOK** of this
 Society with the character —

Charge

Witness my hand,

—, Secretary.

— Chairman.

FORM OF CERTIFICATE FOR VESSELS NAVIGATED BY STEAM.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

Certificate for Vessels navigated by Steam.

_____ Day of _____ 18

_____ certify that the whole of the Boilers and machinery of the Steam Vessel _____ belonging to _____, whereof _____ is Master, _____ Tons, have been carefully inspected and examined by _____ at _____, and _____ find the same to be at this time in good order and safe working condition.

Witness my hand,

Manufacturing Engineer.

The following is a true Account of the Particulars of the machinery of the Steam Vessel above named :

ENGINES.

Number
Diameter of Cylinder
Length of Stroke
No. per Minute
Estimated Power
Diameter of Paddle-wheels
Length of Paddles
Breadth of Paddles
No. of Paddles
On what motion
No. of revolutions per minute ..
Size of the holding-down bolts ..
Condition of ditto
Maker of the Engines
Age of the Engines
When were they last taken out
Present condition of the Engines
Can injection water be taken
from the Bilge in the event of
a serious Leak

FUEL.

Where stowed
If in contact with boiler
If not, what space between Coal
Boxes and Boiler
For what quantity is room pro-
vided
If liable to get wetted.....

BOILERS.

Whether iron or copper
Working pressure
Can it be increased without going
into the Boiler
What are the means of changing
the water while the Boilers are
at work
Maker of the Boilers
Age of the Boilers
When were they last taken out
Present condition
Number of feed pumps
How attached.....
What clear space upon the top-
side of the boiler from wood-
work
Do. at the end from ditto.....
Do. round the chimney from do

PUMPS.

No. of hand pumps
Can they be worked by the En-
gine
If any attached to engine, their
purpose and size.....
No. of force-pumps
No. of branches and hose of
sufficient length to reach to
every part of the vessel.....

Manufacturing Engineer.

KEY TO THE REGISTER

The Stores of Vessels are designated by the Figures 1 and 2 :—

1. Signifying that the Vessel is well and sufficiently found.
2. That she is deficient in either quantity or quality.

Vessels RESTORED to, or CONTINUED on the Character A, will have the number of Years for which they are restored or continued inserted separately under the number originally assigned, in the tenth column; where the term in the latter case has expired, the Letter "C" only will be placed before the figure denoting the number of Years for which Continuation had been allowed.

Vessels marked "S.S." with a date, *in red*, denote that they have been surveyed at that time in accordance with the *second Clause* of the Rules, Sec. 60.

The mark [*B. S.*] denotes that the vessel is classed subject to *Biennial Survey*. The mark [*Expl. B.S.*] denotes that the vessel is built experimentally, and classed subject to *Biennial Survey*. See Section 31.

British North-American built vessels, opened as required by the Rules, Sec. 63, will be marked in the Register "S.S" with the number of years that may elapse before they are again opened, and the year of survey; thus—"S.S.59—3Yrs—"

When the term "almost Rebuilt" is used, it implies large repairs, but that the Rules for Restoration have not been fully complied with.

The figures in the Tenth Column, to vessels in the *Æ* Class, imply that they were originally classed A, for that number of Years. The cipher 0 in this Column indicates that (from inferior construction) there were no "number of Years first assigned."

Ships built under Special Survey will be shown by a Cross, thus ✕.

In the Second Column.

Bk.....Barque	KKetch	SrSchooner
Bg.....Brig	LrLugger	StSchoot
Bn.....Brigantine	PolPolacre	Stm.....Steamer
Cr.....Cutter	S.....Ship	SwSnow
Dr.....Dogger	ScwScrew	YtYacht.
GGalliot	SkSmack	
HHoy	SpSloop	

pt.—part—s.—sheathed—d.—doubled—C.—coppered—I. B.—
 Iron Bolts—c.f.—copper fastened—M.—sheathed with Marine Metal
 —Y.M.—sheathed with Yellow Metal—G. Iron—sheathed with
 Galvanized Iron—Z.—sheathed with Zinc—F.—Felt.
 C.lm.—Coppered to light water or ballast mark.
 C.T.—Copper Bolts substituted for Treenails.

In the Third Column.

Sailing Vessels thus distinguished, "A P. 30 H." denote that they are Fitted with Auxiliary Steam Power, equal to 30 Horses.

In the Fourth Column.

H. P.—Horse Power. M. C.—Machinery certified. Where two Tonnages are given, the upper one is the Measurement by the old Act, the under one is that by the new Act, which commenced the 1st January, 1836.

KEY TO THE REGISTER.

In the Fifth Column.

The Timber of which vessels are built is marked by the following Italic Letters :

<i>A</i>	Ash	<i>Hm.</i>	Hemlock	<i>RP</i>	Red Pine
<i>BB</i>	Black Birch	<i>J.</i>	Juniper	<i>YP</i>	Yellow Pine
<i>Bh.</i>	Beech	<i>L.</i>	Locust	<i>S.</i>	Spruce
<i>C.</i>	Cedar	<i>Lh</i>	Larch	<i>Sb</i>	Sabicu
<i>Chs.</i>	Chesnut	<i>LO</i>	Live Oak	<i>Sl</i>	Saul
<i>E.</i>	Elm	<i>M.</i>	Mahogany	<i>T.</i>	Teak
<i>F.</i>	Fir	<i>O</i>	Oak	<i>Tam</i>	Tamarac
<i>G</i>	Gum	<i>P</i>	Pine	<i>WH.</i>	Witch Hazel
<i>Ght.</i>	Greenheart	<i>PP</i>	Pitch Pine	<i>WO</i>	White Oak
<i>Hk.</i>	Hackmatack				

Cl.—Clincher—len.—lengthened—lrp.—large repairs—Srprs—Some repairs—Drp.—Damage Repaired—ND.—New Deck—XTSDs—New Top-Sides—w.s.—Wales sheathed—NW.—New Wales—NB.—New Bottom—N Kl.—New Keel—plk.—Plank—N Kl sn.—New Keelson—alm. rb.—almost rebuilt—pt O.M.—part old Timbers or Plank—Rest.—Restored—Cont.—Continued.—BlkHds.—Bulk Heads.

*In the Eighth Column:—*U.S. for American Property.

In the Ninth Column (Surveying Ports):

Abn.. Aberdeen	Drt .. Dartmouth	Lon. . London	St J.. St. John
Abs.. Aberystwith	Dub... Dublin	Ldy.. Londonderry	Ser... Scarborough
All .. Alloa	Dum.. Dumfries	Lyn.. Lynn	Sil. . . Scilly
Arb.. Arbroath	Dun.. Dundee	Mar.. Margate	Shl.. { Shields, N.
Bng.. Bangor	Dgr .. Dungarvon	Mpt.. Maryport	Shl.. { Shields, S.
Bnf.. Banff	Exr .. Exeter	Mil .. Milford	Shm.. Shoreham
Bar.. Barmouth	Fal .. Falmouth	Mch.. Miramichi	Sli. . . Sligo
Bpl.. Barnstaple	Foy.. Fowey	Mth.. Monmouth	Sou.. Southampton
Bms.. Beaumaris	Gal .. Galway	Mtr .. Montrose	Stk .. Stockton
Bel .. Belfast	Glr .. Gloucester	N Se.. Nova Scotia	Str .. Stranraer
Bwk.. Berwick	Gmh. Grangemouth	Nwc.. Newcastle	Sld .. Sunderland
Bid.. Bideford	Goo.. Goole	Nhv.. Newhaven	Sws.. Swansea
Blg.. Belgium	Gns.. Guernsey	Npt.. Newport	Tgn.. Teignmouth
Bly.. Blyth	Hgt.. Harrington	Nry.. Newry	Tps.. Topsham
Bos.. Boston	Hpl.. Hartlepool	Ork.. Orkneys	Tqy.. Torquay
Bdg.. Bridgewater	Har.. Harwich	P. E. I. { Prince Ed-	Wtf.. Waterford
Bpt.. Bridport	Hol.. Holland	ward Island	Wls.. Wells
Brs .. Bristol	Hul.. Hull	Pad.. Padstow	Wex.. Wexford
Car .. Cardigan	Inv .. Inverness	Pnz.. Penzance	Wey.. Weymouth
Cff .. Cardiff	Ips .. Ipswich	Pet.. Peterhead	Wtb.. Whitby
Chp.. Chepstow	I.M.. Isle of Man	Ply.. Plymouth	Whn.. Whitehaven
Chs.. Chester	Jer .. Jersey	Poo.. Poole	Wrk.. Workington
Cly. { Clyde	Lan.. Lancaster	Pts.. Portsmouth	Yar.. Yarmouth
} Glasgow, &c.	Lth .. Leith	Pmd.. Portmadoc	Ygh.. Youghal
Crk .. Cork	Lim.. Limerick	Ram.. Ramsgate	
Cws.. Cowes	Liv .. Liverpool	Qbc... Quebec	
Dov.. Dover	Lly .. Llanelly	St. I.. St. Ives	

In the Eleventh Column.

The Figures under the Character denote either the Year, or the Month of the current Year, in which the Vessel was last surveyed.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

SHIPS CLASSED A IN RED, AND Æ, INCLUDING THOSE WITH THE ASTERISK.

THE General Committee of this Society having determined by Resolutions passed from year to year, that the Characters of all Ships of the Æ class (*including those with the Asterisk*) which had not been surveyed between the years 1834 and 1857 inclusive, should, in conformity with the Rules, sections 60 and 61, be omitted, and that such Ships should not be re-classed in the Society's Register Book, until again surveyed;—And it having been this day decided to extend the Resolutions above-mentioned to such Ships of this Class, and to those classed A in red, as have not been surveyed since the year 1858:—NOTICE is hereby given, that in pursuance of this decision, the Characters of such Ships of the Classes in question as shall not be re-surveyed prior to the 30th of June next (not having been surveyed since 1858), will be omitted in reprinting the Register Book for the Year 1860-61.

By order of the Committee,

GEORGE B. SEYFANG.

Secretary.

2, *White Lion Court, Cornhill, London, (E.C.)*

3rd November, 1859.

N.B.—In the case of Ships which it shall be made to appear, by letter addressed to the Secretary, have not been in any port in the United Kingdom since 1858, the above Resolution will not be applied.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

SHIPS CLASSED A WHOSE CHARACTERS EXPIRE on 31st DECEMBER, 1859.

NOTICE is hereby given, that in pursuance of a Resolution passed this day by the Committee:—

“Ships Classed A for a term of years, and which term will expire at the end of the year 1859, will have the character A struck out of the Register Book on the 31st December next, and the word ‘*lapsed*’* inserted in lieu thereof. Ships, however, which have been surveyed during the year 1859, and Ships which the owners thereof shall make it appear, *by letter addressed to the Secretary*, have not been in any Port in the United Kingdom during the year 1859, will have the Character A retained until the reprinting of the Register Book in June next.”

* If the Owners desire that they should lapse to the *Æ* character, instead of being marked ‘*lapsed*,’ the Committee will, on application, give directions accordingly.

By order of the Committee,

GEORGE B. SEYFANG,

Secretary.

2, White Lion Court, Cornhill, London, (E.C.)

3rd November, 1859.

CIRCULAR TO SURVEYORS:

LLOYD'S REGISTER OF BRITISH AND
FOREIGN SHIPPING.

SIR,

With reference to the Circular Letter of the 5th of May last respecting Yellow Metal Bolts, which are frequently found to be broken, I am instructed to acquaint you, that it appears from the information which has been laid before the Committee, that the imperfection in this respect is mainly attributable to carelessness or neglect in heating and cooling the metal in forming the heads.

It is necessary, therefore, that you should continue to call the attention of the Shipbuilders in your district to this important point; and I am further to express the Committee's desire that you will also recommend, when Yellow Metal Bolts are used through Iron Knees &c., that they be driven on rings of pure copper.

I am, SIR,

Your obedient servant,

GEO. B. SEYFANG,

Secretary.

2, *White Lion Court, Cornhill, London (E.C.)*

15th March, 1860.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

IRON SHIPS.

NOTICE is hereby given, that in pursuance of Resolutions passed by the Committee of this Society, the following amendments have been made in the Rules and Regulations for the building of Iron Ships, viz. :—

“ All plates, and all beam and angle irons, used in ships intended for classification, are to be stamped on both sides with the name of the manufacturer and the place where made.”

“ In future the plates in Iron Ships, except the fore and after hoods, are to be in lengths not less than nine feet.”

By order of the Committee,

GEORGE B. SEYFANG,

Secretary.

N.B.—The above Regulations will come in force on the 1st October, in accordance with the Rules, Sec. 17.

2, White Lion Court, Cornhill, London (E C.)

26th March, 1860.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

RULES AND REGULATIONS.

NOTICE is hereby given, that in pursuance of Resolutions passed by the Committee this day, the following addition has been made to the Rules for the building of Iron Ships, whereby additional longitudinal securities are required in ships of extreme length, in proportion to their breadth or depth, viz. :—

“The Scantlings given in Table G are intended for ships the length
“of which, measured from the fore part of the stem to the after part
“of the stern-post on the range of the upper deck, does not exceed
“seven times their extreme breadth, or ten times their depth of hold,
“taken from the upper part of floors to the top of the upper deck
“beams.

“For ships which are intended to exceed in length the above-named
“proportions, the builders or owners are to submit for the Committee’s
“approval their plans, with full particulars, for giving the vessel suffi-
“cient additional strength longitudinally, either by doubling or thickening
“the sheerstrake and increasing the size of the stringer plates, or
“otherwise.”

A foot-note has also been appended to Sec. 8 of the above Rules, recommending that in all cases the sheerstrake be *an outside strake*, so as to admit of the butt straps or lining pieces being extended in one piece from the fore side of the frame next afore the butts to the aft side of the frame next abaft the butts, or to admit of doubling the sheerstrake where it may be required :—also that all butt straps or lining pieces be fitted *with the fibre of the iron in the same direction as the fibre of the plating* to which they are rivetted.

The Rule, Sec. 54, for the continuation of Wood Ships, has been amended, so as to allow ships (*wherever built*) originally classed 4 years A 1, a continuation of *two* years, provided they undergo the examination therein prescribed.

It has also been made a Regulation that the Windlass of all ships be examined by unhooking and stripping wood linings *at periods not exceeding one-half the time of original classification, and at all Special Surveys under the Rules.*

By Order of the Committee,

GEORGE B. SEYFANG,

Secretary.

2, White Lion Court, Cornhill, London, (E.C.)

31st May, 1860.

